



Aftermarket Product Guide





OUR MISSION

Introducing the *new* driving force in
aftermarket driveline systems.

For generations, GKN Walterscheid has maintained the global leadership role in innovation and quality for off-highway driveline systems.

In order to deliver this level of commitment and service to the North American market, GKN Walterscheid has introduced **Agmaster™**, a complete line of standard and metric style driveline systems and related components developed to meet the specific needs of the North American aftermarket.

The Agmaster line is supported by a dedicated North American Aftermarket division as well as the worldwide resources of GKN Walterscheid.

Our goal with the Agmaster product line is straightforward: to provide the performance, reliability and service you have come to expect from every product bearing the Walterscheid name.

Agmaster by Walterscheid.

Put the world leader to work for you.



REFERENCE CHARTS

Horsepower/Cross Kit Guide

OEM Style	HP @ 540 RPM	HP @ 1000 RPM	Cap Diameter	Cap-to-Cap Overall
Agmaster Series 1	16	24	22.0 mm	54.8 mm
Agmaster Series 2	27	42	23.8 mm	61.2 mm
Agmaster Series 3	38	60	27.0 mm	74.5 mm
Agmaster Series 4	53	83	32.0 mm	76.0 mm
Agmaster Series 5	90	139	36.0 mm	89.0 mm
Bondioli Style - 1	15	23	22.0 mm	54.0 mm
Bondioli Style - 2	21	32	23.8 mm	61.2 mm
Bondioli Style - 3	29	44	27.0 mm	70.0 mm
Bondioli Style - 4	35	55	27.0 mm	74.5 mm
Bondioli Style - 5	49	77	30.2 mm	79.4 mm
Bondioli Style - 6	64	99	30.2 mm	92.0 mm
Bondioli Style - 7	75	118	34.9 mm	94.0 mm
Bondioli Style - 8	95	150	34.9 mm	106.4 mm
Walterscheid Style - 2100	16	24	22.0 mm	54.8 mm
Walterscheid Style - 2200	27	42	23.8 mm	61.2 mm
Walterscheid Style - 2300	38	60	27.0 mm	74.5 mm
Walterscheid Style - 2400	53	83	32.0 mm	76.0 mm
Walterscheid Style - 2500	90	139	36.0 mm	89.0 mm
Walterscheid Style - I	30	44	27.0 mm	70.0 mm
Walterscheid Style - II	41	59	34.0 mm	90.0 mm
Walterscheid Style - 220	64	99	30.2 mm	92.0 mm
Weasler Style - 6	16	30	31/32"	2 9/32"
Weasler Style - 12	24	45	1 1/16"	2 1/2"
Weasler Style - 14	33	62	1 1/8"	2 5/8"
Weasler Style - 35	59	111	1 1/4"	3 13/64"
Weasler Style - 44	87	165	1 5/16"	4"
Weasler Style - 55	121	230	1 17/32"	4 19/64"

The data listed above should be used as reference only and does not necessarily reflect actual product performance.

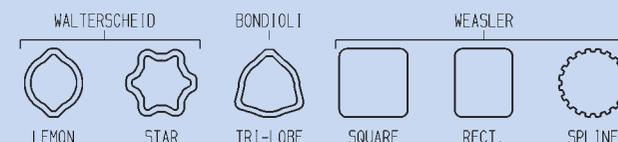


TABLE OF CONTENTS



Mission / Vision	3
Safety & Maintenance Section	
Warning Guidelines & Safety Decals	6
Lubrication Maintenance Guide	7
Shield Replacement	8
Universal Joint & CV Joint Servicing	14
Driveline Length Adjustment	20
Reference Section	
General Unit Conversions	22
Cross & Bearing Kit Interchangeability Chart	23
Horsepower and Cross Kit Identification Guide	24
Part Number Explanation Guide	25
Replacement Drivelines	
Shaft Replacement Identification Guide	28
All Purpose Drivelines	28
Application Guide / Replacement Drivelines & Half-Shafts ...	30
Constant Velocity Drivelines & CV Components	
Application Guide / Replacement CV Drivelines & Half-Shafts ..	34
Agmaster Series CV Components	36
Clutches & Clutch Components	
Application Guide	42
Complete Clutches	44
Friction Clutches & Components	46
Radial Pin Clutches & Components	50
Overrunning Clutches & Components	51
Shear Bolt Clutches & Components	53
Miscellaneous Clutch Components	56

Metric Driveline Components

Agmaster /Walterscheid - Series 1	58
Agmaster - Series 2	60
Agmaster - Series 3	62
Agmaster - Series 4	64
Agmaster - Series 5	66
1 Series - Bondioli & Pavesi	68
2 Series - Bondioli & Pavesi	70
3 Series - Bondioli & Pavesi	72
4 Series - Bondioli & Pavesi	74
5 Series - Bondioli & Pavesi	76
6 Series - Bondioli & Pavesi	78
7 Series - Bondioli & Pavesi	80
8 Series - Bondioli & Pavesi	82

Standard Driveline Components

6 Series - Weasler	84
12 Series - Weasler	87
14 Series - Weasler	90
35 Series - Weasler	93
44 Series - Weasler	96
55 Series - Weasler	99

Cross & Bearing Kits

Cross & Bearing Kit Replacement Guide	102
---	-----

Profiles

Profile Identification Guide	104
------------------------------------	-----



Safety standards require a safety sign (Part# 4383333) be applied to the outer guard tube of the implement input driveline to remind the operator that the implement should not be operated unless the following conditions are met:

1. All driveline guards, tractor & equipment shields are in place.
2. The driveline is securely attached at both ends.
3. The driveline guards turn freely on the driveline.



Part# 4383333

Failure to meet these conditions could result in serious injury or even death. A second safety sign (Part# 4383334) is required to be applied under the guard warning the operator when the driveline guards are missing and that the implement must not be operated.

Serious injury or death can result by operating equipment without the proper guards in place. Do not operate any equipment without guards installed on the driveline.

Keep away from rotating parts. Wear appropriate, tight-fitting clothing for safety.


For stationary equipment (pumps, generators, blowers, etc.) which are not hitched to the tractor, proper spacing must be maintained to allow sufficient overlap of the driveline profile tubes. Set the tractor brake, block the wheels on both the tractor and implement to ensure proper spacing at all times.

Consult the implement operators manual for further safety and operating instructions.


Also available is the "Agricultural Implement Drivelines Safety Manual" (Part# 4391606).




Part# 4383334

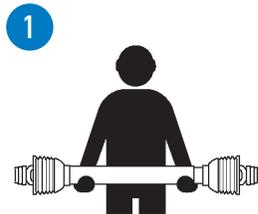


Keep the driveline horizontal during handling to reduce the risk of an accident due to the driveline sliding apart.

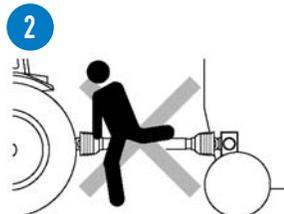

Do not use the PTO driveline as a step or support.

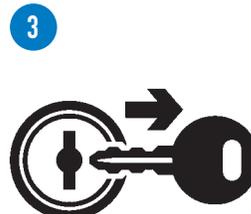

Prior to maintenance and repair work, switch off the engine, remove the ignition key and wait until all moving parts of the machine have come to a complete stop.

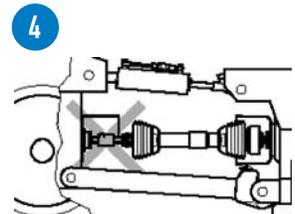

Do not use spline extensions or adapters on the tractor PTO Shaft.



Lubrication Requirements

LUBRICATION REQUIREMENTS

*** The double yoke cavity will hold as much as 30 pumps of grease. To insure maximum joint life:**

- Lubricate double yoke when joint is in straight position.
- Visually inspect all wear surfaces inside double yoke to insure presence of grease after operation.

Consult operators manual for additional information.


For maximum drive shaft service life, regularly lubricate the points shown in the figure above at the specified intervals.

The figure above indicates locations for both CV and standard drive shafts.

Prior to maintenance and repair work, switch off the engine, remove the ignition key and wait until all moving parts of the machine have come to a complete stop.

Note! This guide is valid only for Agmaster style and Walterscheid style PTO Shields. These styles of shields are not compatible with other manufacturers styles of PTO drive shafts. Ensure that shields are properly installed before using any PTO drive shaft.

Dismantling

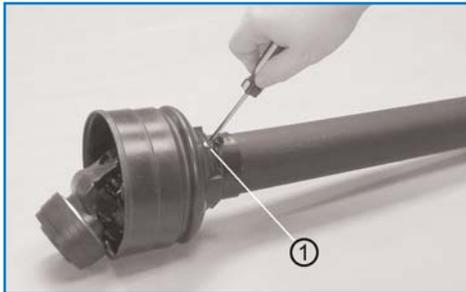

Remove original locking screw and discard **(1)**.



Rotate cone to mounting position where bearing ring tabs align with the notches in the cone (arrows).



Remove and discard original half shield (arrow).



Remove and discard original bearing ring **(2)**.



Assembly



Remove locking screw from new replacement shield **(1)**. Retain screw for use in later step.



Rotate cone to mounting position where bearing ring tabs align with the notches in the cone (arrows).



Remove the new shield bearing ring **(2)**. Retain for use in later step.



Grease the inner profile tube and the bearing groove on the yoke.



Place new bearing ring **(2)** on the bearing groove with tabs facing profile tube.

Assembly (continued)



Slide on the new half-shield over the profile tube (arrow).




Rotate cone to locking position where a bearing ring tab aligns with the screw hole (arrows).


Fasten the new locking screw **(1)**.




Dismantling

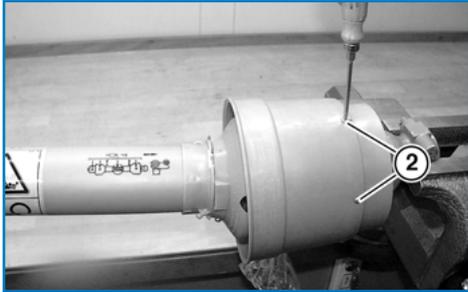


Remove and discard original fastening screws **(2)**.

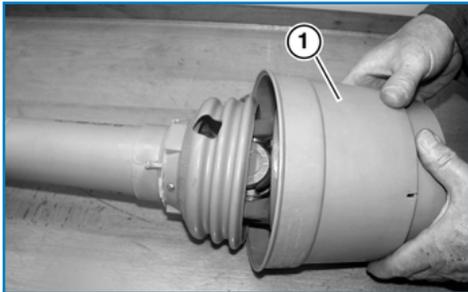


Remove and discard original double-yoke guard cone **(1)**.

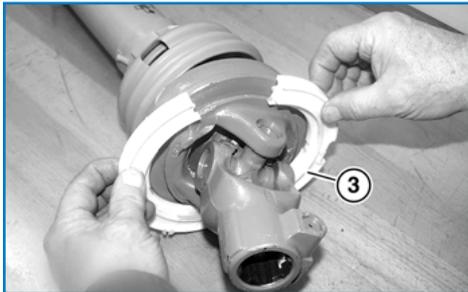

Remove and discard original bearing ring **(3)**.

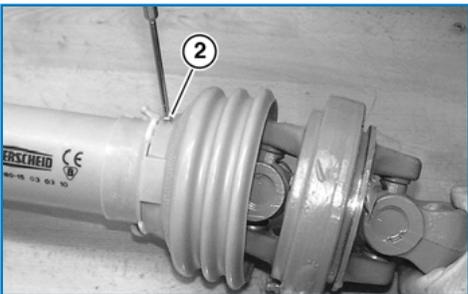


Remove and discard original locking screw **(2)**.

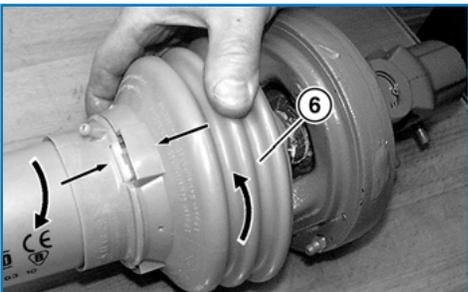


Rotate cone to mounting position where bearing ring tabs align with notches in the cone (arrows).

Dismantling (continued)

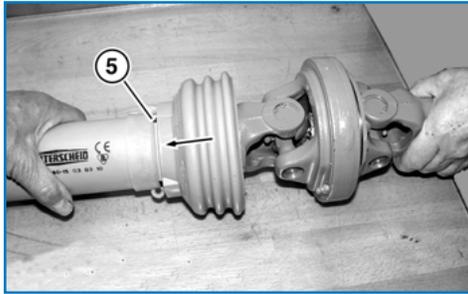


Remove and discard original half-shield **(5)**.

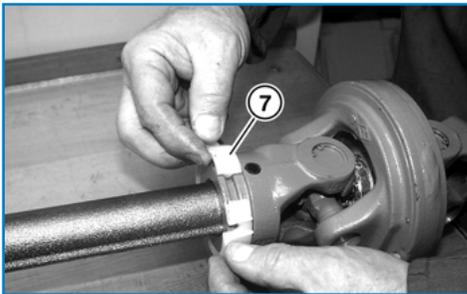


Remove and discard original bearing ring **(7)**.

Assembly

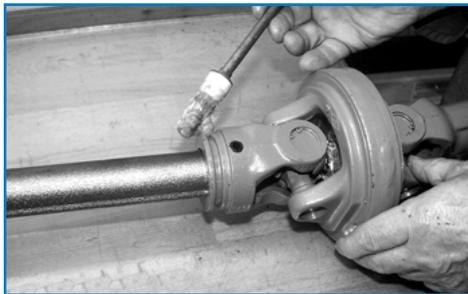


Grease the inner profile tube and the bearing groove on the yoke.

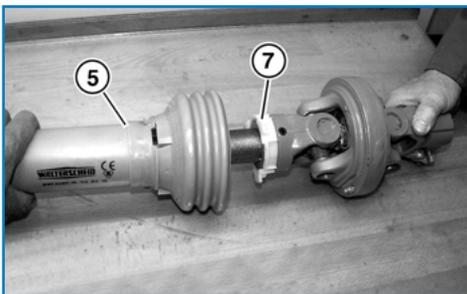

Place new bearing ring **(7)** on the bearing groove with tabs facing profile tube. Slide on the new half-shield **(5)** over the profile tube.




Assembly (continued)

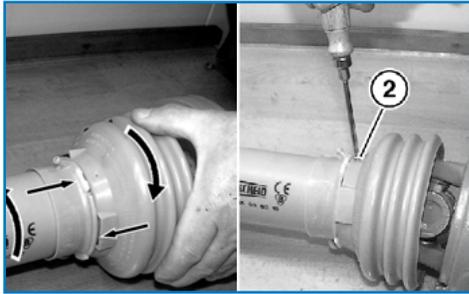

Rotate cone to locking position where a bearing ring tab aligns with the screw holes.
Fasten the new locking screw **(2)**.




Grease bearing groove on the CV double yoke.

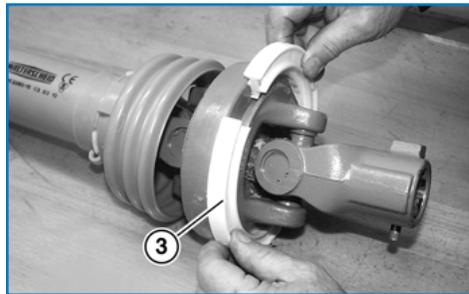

Install new bearing ring **(3)**.




Slide new guard cone for the CV double yoke from the connecting end over the tab of the bearing ring. Ensure the holes for the screws are visible in the slots.

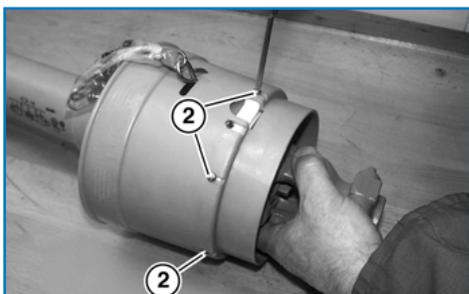


Install the new fastening screws **(2)**.


Dismantling

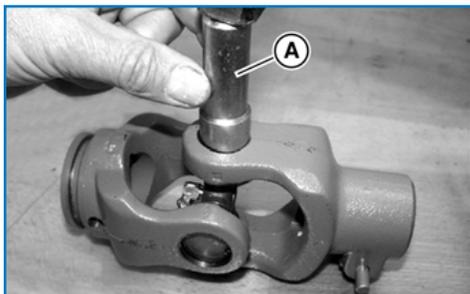

Relieve snap rings of stress with hammer blows to the drift punch Part# 4000004 (**A**).

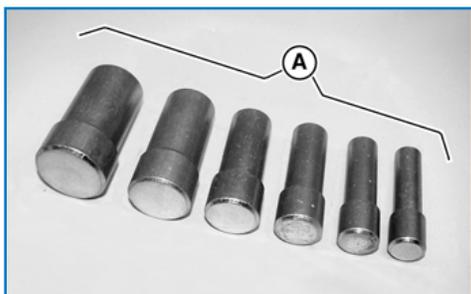


Drift punches Part# 4000004 for needle bearing caps (**A**). Compatible with most major styles and series.

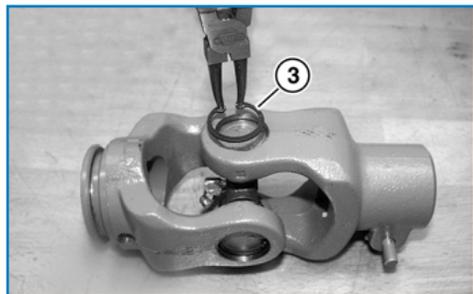

Remove and discard original snap rings (**3**).




Position joint as shown and use light hammer blows on yoke to drive out needle bearing cap (**D**).

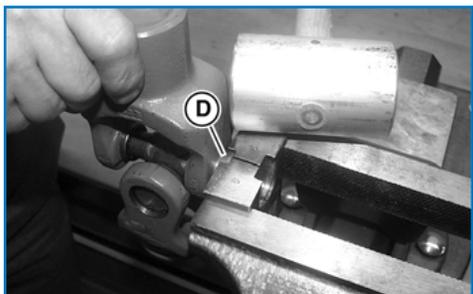


Depending on the size and style, where compatible, we recommend using special tool Part# 4000001 or 4000003 (B or C) to clamp the needle bearing cap (**D**). With or without the special tools, remove needle bearing cap with light hammer blows on the yoke or by turning. Caution: Do not deform the yoke ears or strike the bearing cap.




Dismantling (continued)

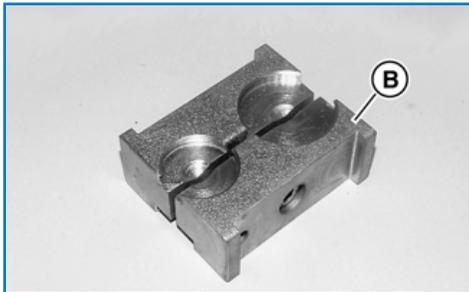

Dismantling tool Part# 4000001 **(B)** compatible only for cross and bearing kits Walterscheid Series 2300/2400/2500/2600, Agmaster Series 3/4/5, and Bondioli equivalent style S4.

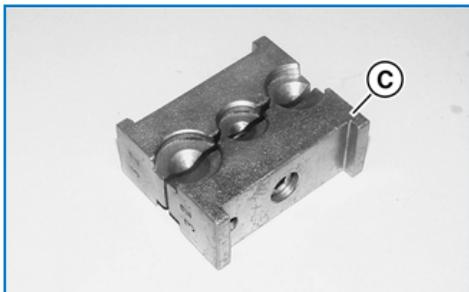


Dismantling tool Part# 4000003 **(C)** compatible only for cross and bearing kits Walterscheid Series 2000/2100/2200/220/II, Agmaster Series 1 or 2, and Bondioli equivalent styles S2 or S6.

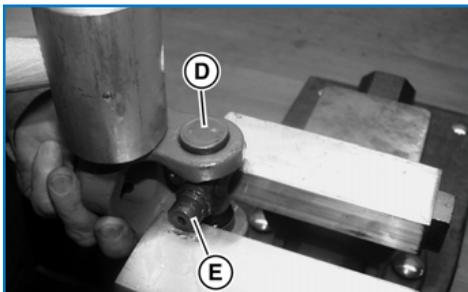

Rest cross journal **(E)** on protected vice jaws as shown and drive needle bearing cap **(D)** up with light hammer blows. Remove and discard original needle bearing cap as described above.

Assembly

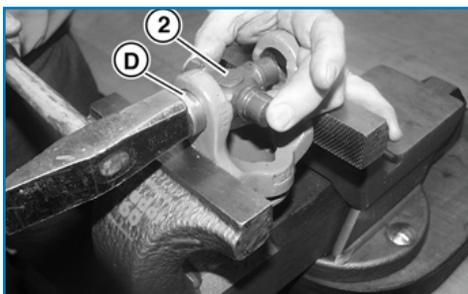


Insert cross **(2)** into yoke. Use cross journals to guide bearing needles when inserting needle bearing cap **(D)**.

Assembly (continued)



Drive in needle bearing cap using drift punch Part# 4000004, until snap ring groove is visible.

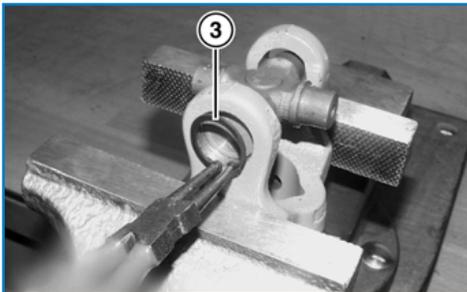


Insert new snap ring **(3)**.
Assemble opposite needle bearing cap as described above.



When mounting second yoke, make sure that grease zerk is easily accessible (arrow).
Mount yoke on cross journal as described above.




Relieve joint of stress by applying hammer blows to yoke ears.

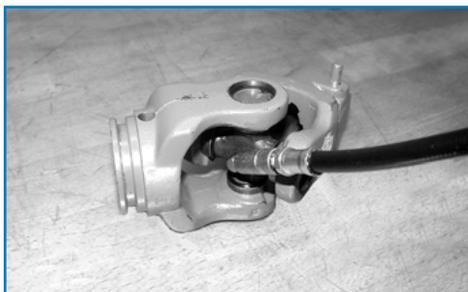

Grease joint until grease escapes from seal.




Dismantling

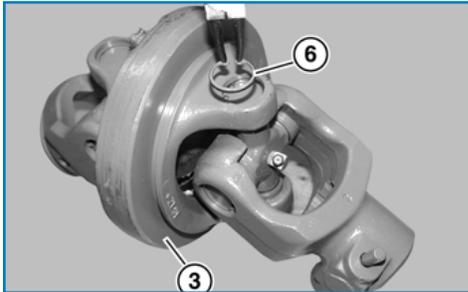


Please note that there are two different cross and bearing kit versions offered. The difference is the presence of round metal washers.

Start on double yoke **(3)** and remove and discard snap ring **(6)** and, on alternate version, remove and discard the round metal washers.

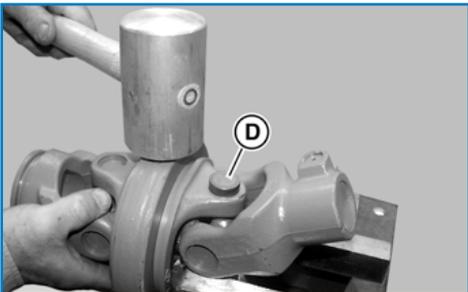


Position yoke as shown and use light hammer blows to drive out needle bearing cap **(D)**.

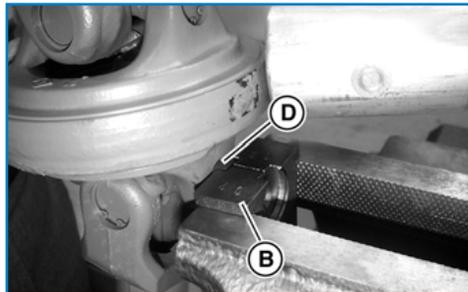


We recommend clamping the yoke and needle bearing cap **(D)** in special tool Part# 4000001 or 4000003 **(B)** or **(C)**. Continue to remove needle bearing cap by light hammer blows on flange or by turning assembly.

Dismantle the other needle bearing caps and discard in the same way.

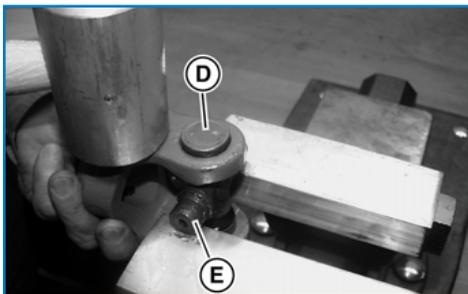


Rest cross journal **(E)** on protected vice jaws as shown and drive needle bearing cap **(D)** out with light hammer blows. Remove and discard needle bearing cap and the cross.

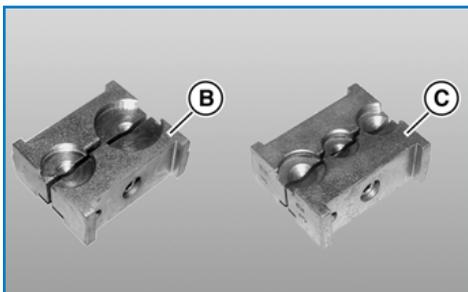


Dismantling tool 4000001 **(B)** for CV cross and bearing kit styles Walterscheid Series 2380/2480/2580 and Agmaster Series 380/480/580.

Dismantling tool 4000003 **(C)** for CV cross and bearing kit style Walterscheid Series 2280.


Assembly

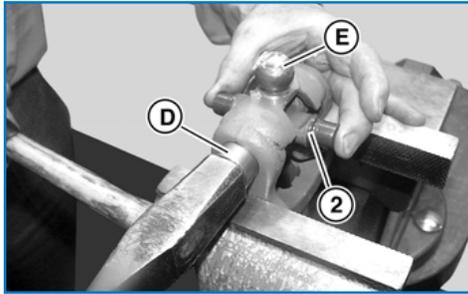


Insert cross **(2)** into yoke with bridge **(E)**.
Use cross journals to guide bearing needles when inserting new needle bearing cap **(D)**.

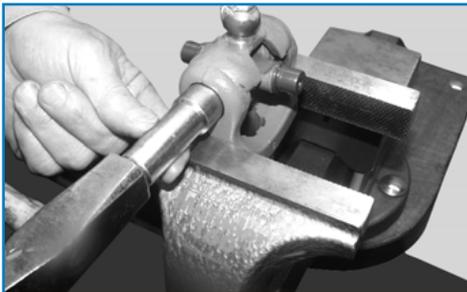

Drive in new needle bearing cap using drift punch Part# 4000004, until snap ring groove is visible.

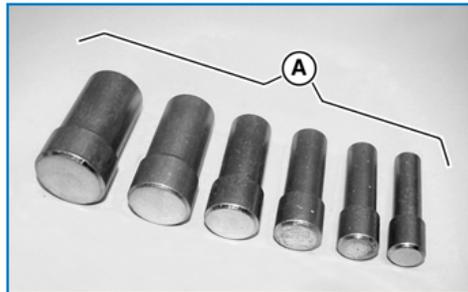


Drift punches Part# 4000004 **(A)** for needle bearing caps.

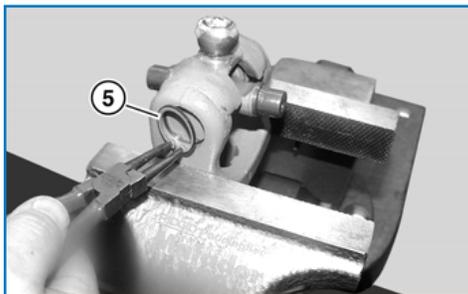


Insert new snap ring **(5)**.
Assemble the opposite needle bearing cap as described above.




Assembly (continued)

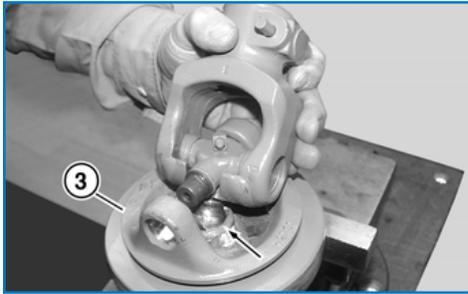


Grease guiding parts (arrow) with a white grease paste. (We recommend Gleitmo 810 or similar).
Insert ball into guide hub, and cross journal into the double yoke **(3)**.

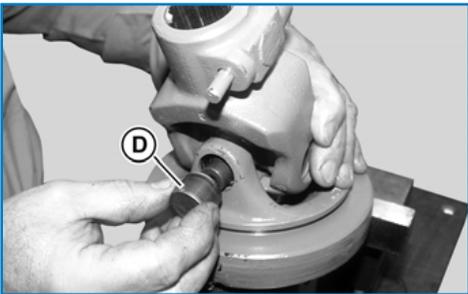


Attach the needle bearing cap **(D)** and drive in. When driving in the needle bearing cap, guide the bearing needles with the cross journal. Drive in needle bearing cap using drift punch Part# 4000004 until snap ring groove is visible.

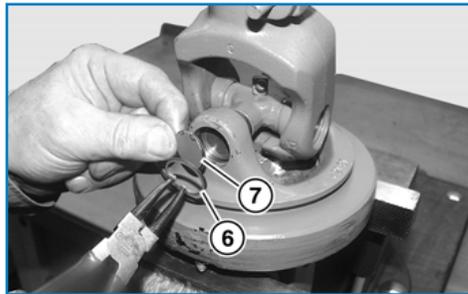

Insert new snap ring **(6)**.
Note: For alternate version insert round plate **(7)** between needle bearing cap and snap ring.
Assemble opposite needle bearing cap as described above.

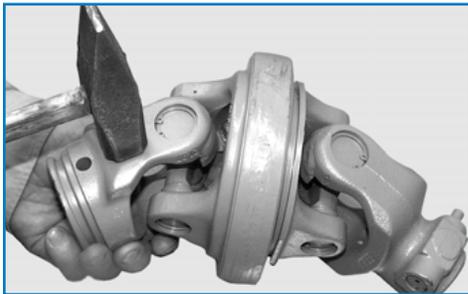

Relieve joint of stress by applying hammer blows to yoke ears.

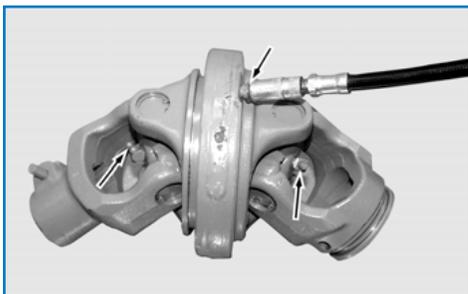


Grease the joints and double yoke until grease escapes.


Prior to maintenance and repair work, switch off the engine, remove the ignition key and wait until all moving parts of the machine have come to a complete stop.

Set the tractor brake, block the wheels on both the tractor and implement to ensure proper spacing at all times.


Driveline Length Adjustment

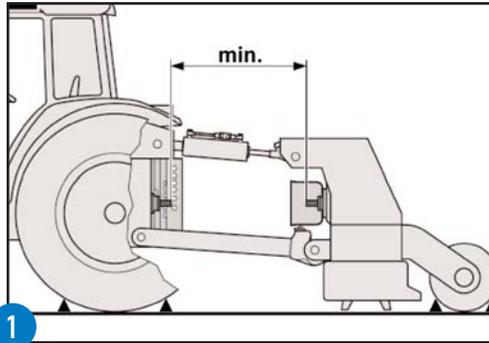


1 Attach implement to tractor.

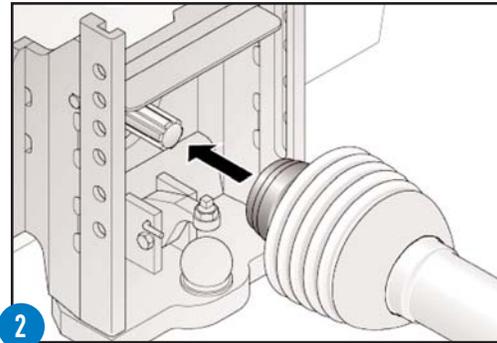


2 Slide PTO drive shaft onto tractor power take-off shaft until lock engages automatically.

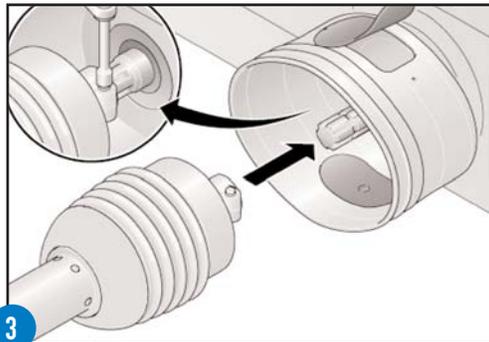


3 Slide PTO drive shaft onto the implement/machine point of implement connection and securely lock.

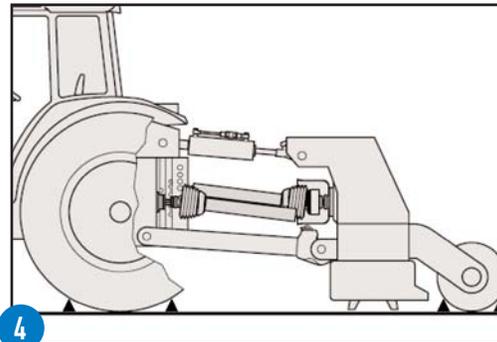


4 For length adjustment, hold PTO drive shaft halves next to each other in shortest operating position.

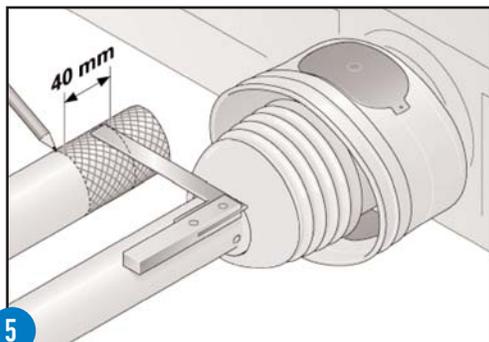

5 Mark PTO drive shaft outer guard half as illustrated in Fig. 5.

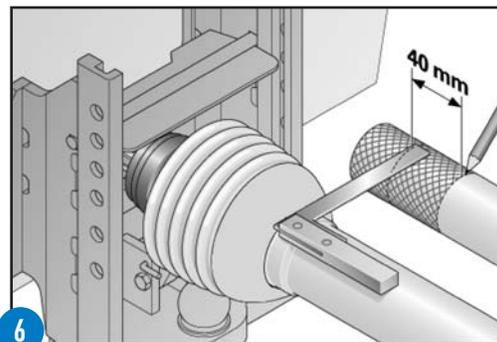


6 Mark PTO drive shaft inner guard half as illustrated in Fig. 6.

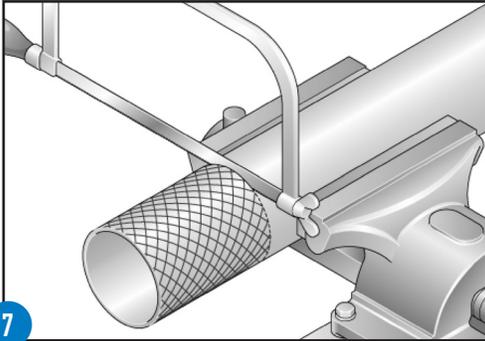


7

Shorten inner and outer guard tube by equal lengths.

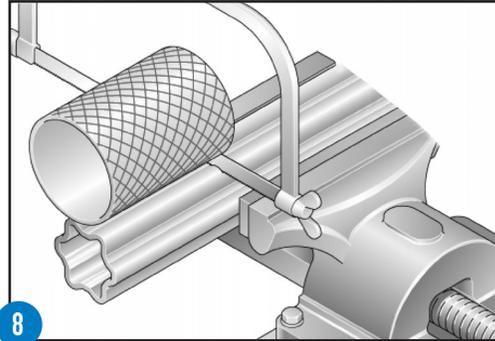


8

Shorten inner and outer telescopic section by same length as guard tube.

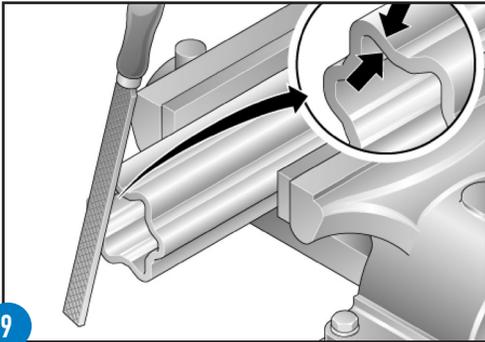

9

Deburr the inside and outside of the inner and outer telescopic sections and carefully remove debris. Grease the telescoping sections.

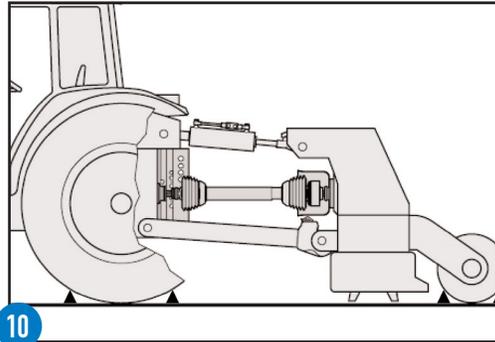

10

Assemble PTO drive shaft and then install between tractor and implement/machine. Ensure that sufficient overlap of the telescoping sections is guaranteed in all working positions.

Conversion Factors

1 inch	=	25.4 mm
1 mm	=	0.0394 inch
1 lb	=	4.44 N
1 N	=	0.225 lb
1 in lb	=	0.113 Nm
1 Nm	=	0.738 ft lb
1 Nm	=	8.85 in lb
1 Hp	=	0.746 kW
1 kW	=	1.341 HP
1 Kg	=	2.305 lb
1 lb	=	0.454 Kg
1 ft lb	=	1.356 Nm
1 M	=	1000 mm
1 ft	=	12 in
1 kW	=	1000 Watts

Conversion Formulas in Standard Units

$$\text{Power (HP)} = \frac{\text{Torque (in lb)} \times \text{Shaft Speed (RPM)}}{63,000}$$

$$\text{Torque (in lb)} = \frac{\text{Power (HP)} \times 63,000}{\text{Shaft Speed (RPM)}}$$

Conversion Formulas in Metric Units

$$\text{Power (kW)} = \frac{\text{Torque (Nm)} \times \text{Shaft Speed (RPM)}}{0.00955}$$

$$\text{Torque (Nm)} = \frac{\text{Power (kW)} \times 0.00955}{\text{Shaft Speed (RPM)}}$$



North American (Standard) Universal Joints


Agmaster Standard Series	Weasler Series	Neapco Series	Spicer Series
6	6	L600	
12	12	1200	1140
14	14	2000	1240
35	35	2200	1340
44	44	44R	1440
55	55		

Metric Universal Joints

Agmaster Metric Series	Bondioli Series	Walterscheid Series
1		2100
2	2	2200
3	4	2300
4		2400
5		2500
	3	I
	6	220
	7 (old series)	230
	8	240
380		2380
480		2480
580		2580

OEM Style	HP @ 540 RPM	HP @ 1000 RPM	Cap Diameter	Cap-to-Cap Overall
Agmaster Series 1	16	24	22.0 mm	54.8 mm
Agmaster Series 2	27	42	23.8 mm	61.2 mm
Agmaster Series 3	38	60	27.0 mm	74.5 mm
Agmaster Series 4	53	83	32.0 mm	76.0 mm
Agmaster Series 5	90	139	36.0 mm	89.0 mm
Bondioli Style - 1	15	23	22.0 mm	54.0 mm
Bondioli Style - 2	21	32	23.8 mm	61.2 mm
Bondioli Style - 3	29	44	27.0 mm	70.0 mm
Bondioli Style - 4	35	55	27.0 mm	74.5 mm
Bondioli Style - 5	49	77	30.2 mm	79.4 mm
Bondioli Style - 6	64	99	30.2 mm	92.0 mm
Bondioli Style - 7	75	118	34.9 mm	94.0 mm
Bondioli Style - 8	95	150	34.9 mm	106.4 mm
Walterscheid Style - 2100	16	24	22.0 mm	54.8 mm
Walterscheid Style - 2200	27	42	23.8 mm	61.2 mm
Walterscheid Style - 2300	38	60	27.0 mm	74.5 mm
Walterscheid Style - 2400	53	83	32.0 mm	76.0 mm
Walterscheid Style - 2500	90	139	36.0 mm	89.0 mm
Walterscheid Style - I	30	44	27.0 mm	70.0 mm
Walterscheid Style - II	41	59	34.0 mm	90.0 mm
Walterscheid Style - 220	64	99	30.2 mm	92.0 mm
Weasler Style - 6	16	30	31/32"	2 9/32"
Weasler Style - 12	24	45	1 1/16"	2 1/2"
Weasler Style - 14	33	62	1 1/8"	2 5/8"
Weasler Style - 35	59	111	1 1/4"	3 13/64"
Weasler Style - 44	87	165	1 5/16"	4"
Weasler Style - 55	121	230	1 17/32"	4 19/64"

The data listed above should be used as reference only and does not necessarily reflect actual product performance.

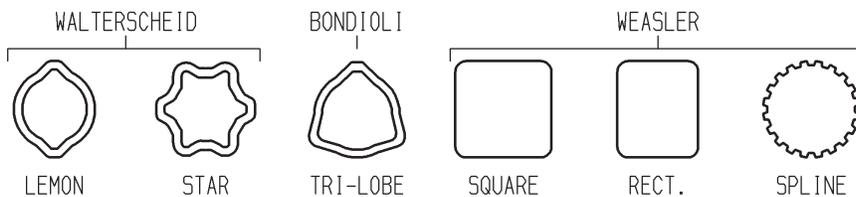




Drivelines

Agmaster parts are numbered with a seven digit alpha-numeric part numbering sequence. A description of this sequence, as detailed below, should be used as a reference guide only.

Explanation:

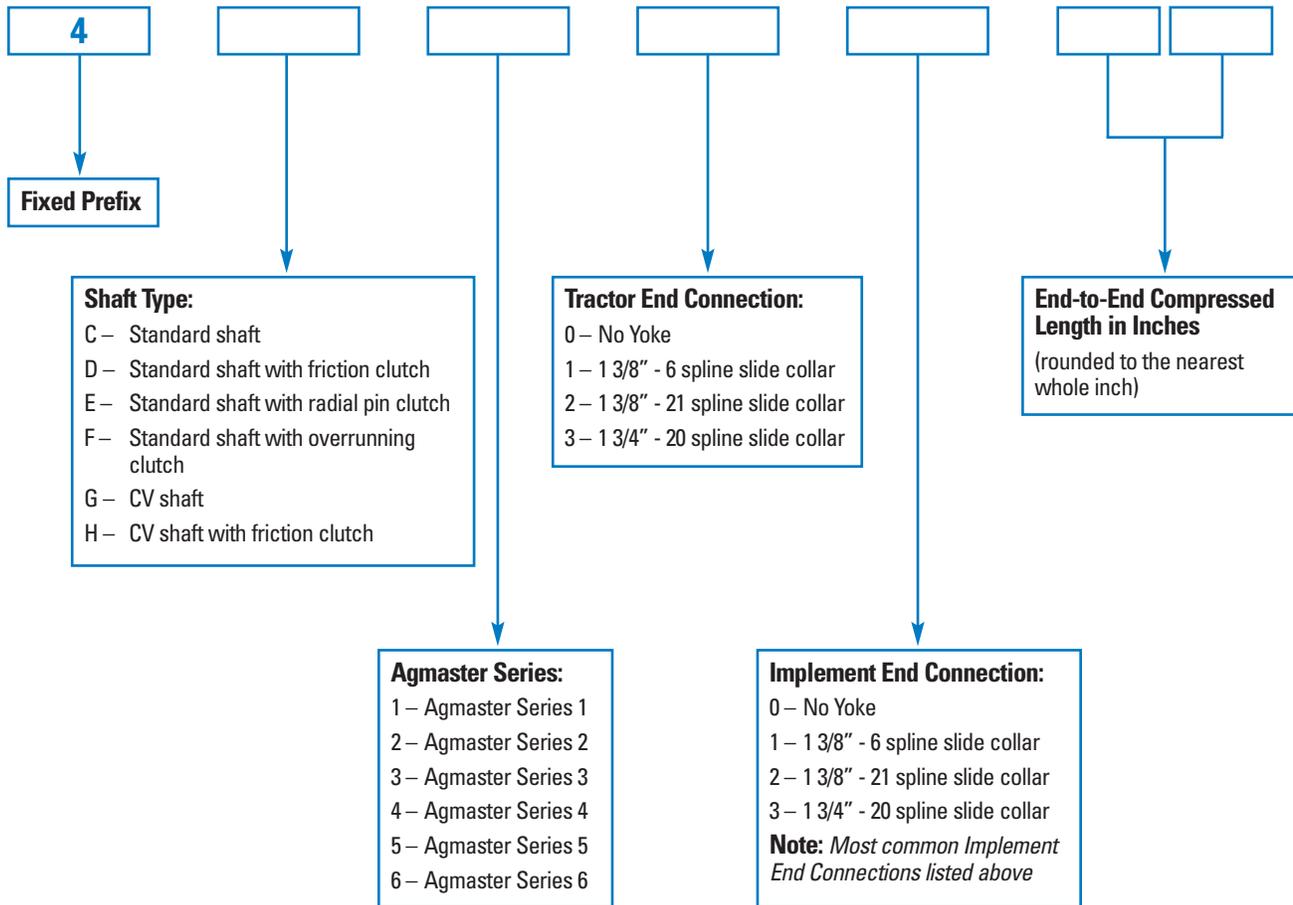

Reference Section

Example:


Agmaster Part Number: 4 C 4 1 3 48

- 4 – Fixed Prefix
- C – Standard Shaft
- 4 – Agmaster Series 4
- 1 – A Tractor End Connection of: 1 3/8" - 6 spline slide collar
- 3 – An Implement End Connection of: 1 3/4" - 20 spline slide collar
- 48 – An End-to-End Compressed Length of 48 Inches.

Half Shafts

Agmaster parts are numbered with a seven digit alpha-numeric part numbering sequence.
 A description of this sequence, as detailed below, should be used as a reference guide only.

Explanation:

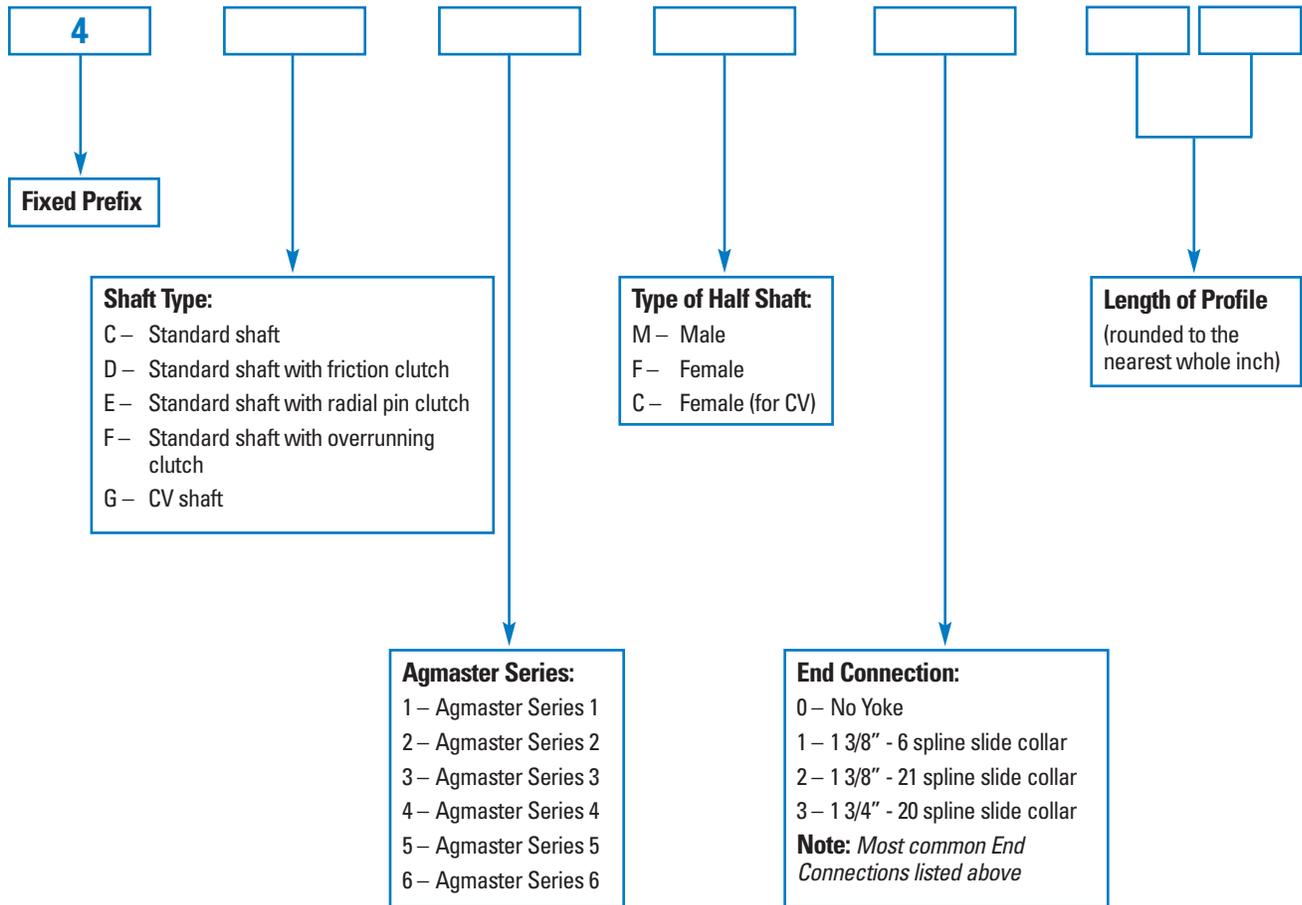

Example:

Agmaster Part Number: 4 G 6 M 1 27

- 4 – Fixed Prefix
- G – CV Shaft
- 6 – Agmaster Series 6
- M – Male Half Shaft
- 1 – An End Connection of: 1 3/8" - 6 spline slide collar
- 27 – A Profile Length of 27 Inches.

Reference Section




Components


Agmaster parts are numbered with a seven digit alpha-numeric part numbering sequence. A description of this sequence, as detailed below, should be used as a reference guide only.

Examples:


Tractor Yokes

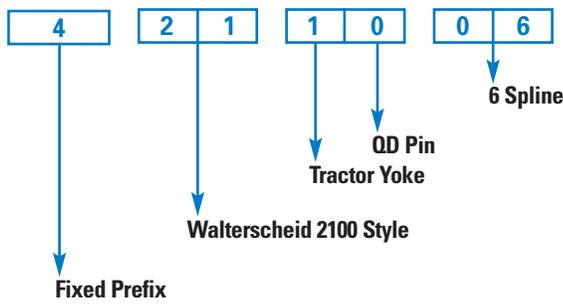


Outer Profile Tubes

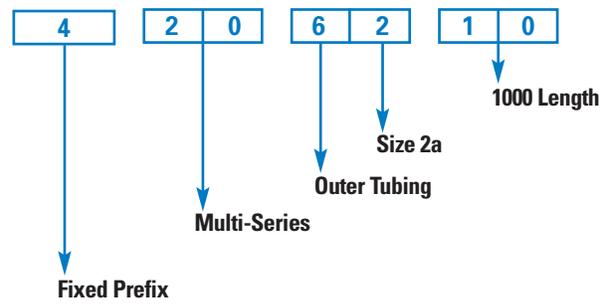


Cross Kits

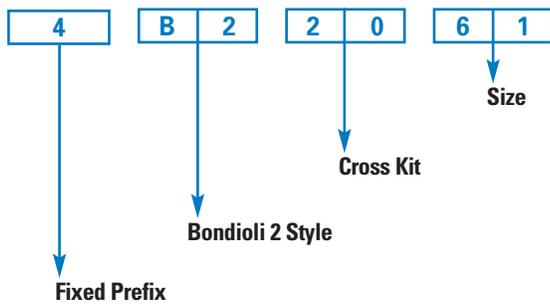


Outer Profile Yokes

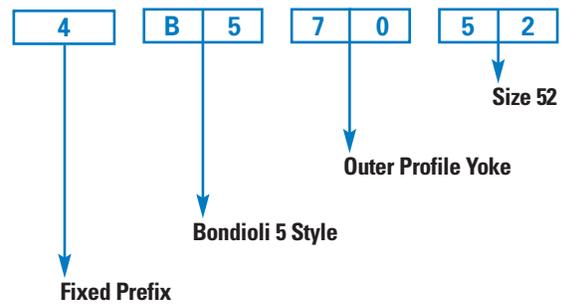

Inner Profile Yokes

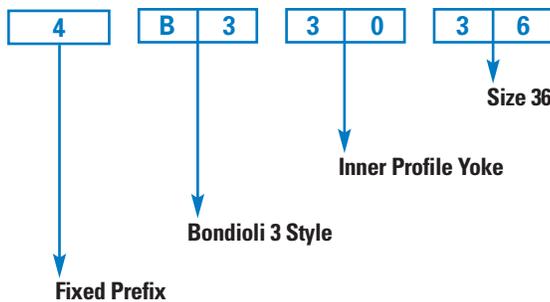

Implement Yokes

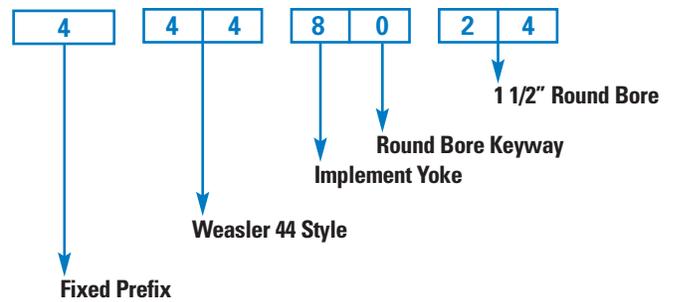


Shaft Replacement Guide

Agmaster Replacement Series	Bondioli	Weasler	Neapco	Walterscheid	Hayes Dana/Spicer
AGM1	1	6	N1000	2100	1000
AGM2	2	12	1200	2200	1140
AGM3	3 or 4	14	2000	2300	1240
AGM4	5 or 6	35	2200	2400	1340
AGM5	7 or 8	44	N44	2500	1440

All Purpose Replacement Drivelines

Complete

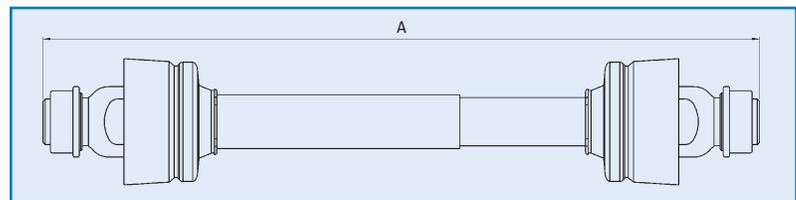


Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C11135	1	902 mm/35.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	620 mm/24.4"	4C1M124	605 mm/23.8"	4C1F124
4C11155	1	1402 mm/55.2"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	1120 mm/44.1"	4C1M144	1105 mm/43.5"	4C1F143
4C21135	2	906 mm/35.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	600 mm/23.6"	4C2M123	595 mm/23.4"	4C2F123
4C21147	2	1206 mm/47.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	900 mm/35.4"	4C2M135	895 mm/35.2"	4C2F135
4C21155	2	1406 mm/55.4"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	1100 mm/43.3"	4C2M143	1095 mm/43.1"	4C2F143
4C31136	3	924 mm/36.4"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	580 mm/22.8"	4C3M123	575 mm/22.6"	4C3F123
4C31156	3	1424 mm/56.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	1080 mm/42.5"	4C3M142	1075 mm/42.3"	4C3F142
4C31545	3	1162 mm/45.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - Rd Bore w/Pin Hole	840 mm/33.1"	4C3M133	825 mm/32.5"	4C3F532
4C41136	4	934 mm/36.8"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	580 mm/22.8"	4C4M123	565 mm/22.2"	4C4F122
4C41138	4	984 mm/38.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	640 mm/25.2"	4C4M125	615 mm/24.2"	4C4F124
4C41140	4	1034 mm/40.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	680 mm/26.8"	4C4M126	665 mm/26.2"	4C4F126
4C41142	4	1084 mm/42.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	740 mm/29.1"	4C4M129	715 mm/28.1"	4C4F128
4C41156	4	1434 mm/56.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	1080 mm/42.5"	4C4M142	1065 mm/41.9"	4C4F142
4C51138	5	976 mm/38.4"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	560 mm/22.0"	4C5M122	545 mm/21.5"	4C5F121
4C51J51	5	1293 mm/50.9"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline Clamp	900 mm/35.4"	4C5M135	880 mm/34.6"	4C5FJ34
4C52K51	5	1293 mm/50.9"	1 3/8" - 21 Spl. Slide Collar	1 3/8" - 21 Spline Clamp	900 mm/35.4"	4C5M235	880 mm/34.6"	4C5FK34
4C53L51	5	1293 mm/50.9"	1 3/4" - 20 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	900 mm/35.4"	4C5M335	880 mm/34.6"	4C5FL34
4C51158	5	1476 mm/58.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	1060 mm/41.7"	4C5M142	1045 mm/41.1"	4C5F141

4C61159




Without Implement Yoke

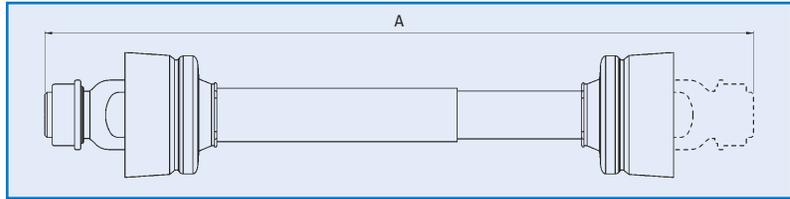

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C11035	1	902 mm/35.5"	1 3/8" - 6 Spl. Slide Collar	*	620 mm/24.4"	4C1M124	605 mm/23.8"	4C1F024
4C11055	1	1402 mm/55.2"	1 3/8" - 6 Spl. Slide Collar	*	1120 mm/44.1"	4C1M144	1105 mm/43.5"	4C1F043
4C21035	2	906 mm/35.7"	1 3/8" - 6 Spl. Slide Collar	*	600 mm/23.6"	4C2M123	595 mm/23.4"	4C2F023
4C21055	2	1406 mm/55.4"	1 3/8" - 6 Spl. Slide Collar	*	1100 mm/43.3"	4C2M143	1095 mm/43.1"	4C2F043
4C31036	3	924 mm/36.4"	1 3/8" - 6 Spl. Slide Collar	*	580 mm/22.8"	4C3M123	575 mm/22.6"	4C3F023
4C31056	3	1424 mm/56.1"	1 3/8" - 6 Spl. Slide Collar	*	1080 mm/42.5"	4C3M142	1075 mm/42.3"	4C3F042
4C41036	4	934 mm/36.8"	1 3/8" - 6 Spl. Slide Collar	*	580 mm/22.8"	4C4M123	565 mm/22.2"	4C4F022
4C41056	4	1434 mm/56.5"	1 3/8" - 6 Spl. Slide Collar	*	1080 mm/42.5"	4C4M142	1065 mm/41.9"	4C4F042
4C51038	5	976 mm/38.4"	1 3/8" - 6 Spl. Slide Collar	*	560 mm/22.0"	4C5M122	545 mm/21.5"	4C5F021
4C51058	5	1476 mm/58.1"	1 3/8" - 6 Spl. Slide Collar	*	1060 mm/41.7"	4C5M142	1045 mm/41.1"	4C5F041

*Driveline supplied without cross & bearing kit and implement yoke. Add cross & bearing kit and yoke as required.

Without End Connections

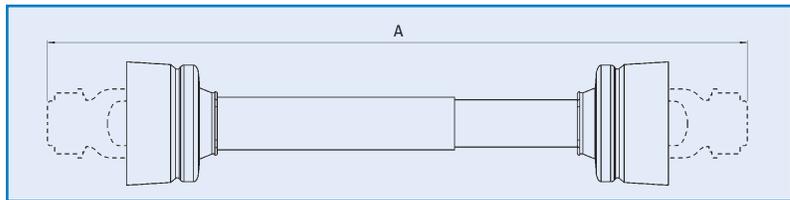


Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C10035	1	902 mm/35.5"	*	*	620 mm/24.4"	4C1M024	605 mm/23.8"	4C1F024
4C10055	1	1402 mm/55.2"	*	*	1120 mm/44.1"	4C1M044	1105 mm/43.5"	4C1F043
4C20035	2	906 mm/35.7"	*	*	600 mm/23.6"	4C2M023	595 mm/23.4"	4C2F023
4C20055	2	1406 mm/55.4"	*	*	1100 mm/43.3"	4C2M043	1095 mm/43.1"	4C2F043
4C30036	3	924 mm/36.4"	*	*	580 mm/22.8"	4C3M023	575 mm/22.6"	4C3F023
4C30056	3	1424 mm/56.1"	*	*	1080 mm/42.5"	4C3M042	1075 mm/42.3"	4C3F042
4C40036	4	934 mm/36.8"	*	*	580 mm/22.8"	4C4M023	565 mm/22.2"	4C4F022
4C40056	4	1434 mm/56.5"	*	*	1080 mm/42.5"	4C4M042	1065 mm/41.9"	4C4F042
4C50038	5	976 mm/38.4"	*	*	560 mm/22.0"	4C5M022	545 mm/21.5"	4C5F021
4C50058	5	1476 mm/58.1"	*	*	1060 mm/41.7"	4C5M042	1045 mm/41.1"	4C5F041

*Driveline supplied without cross & bearing kits, tractor and implement yoke. Add cross & bearing kits and yokes as required.


4C6XX59 With cross kits

Catfish Pond

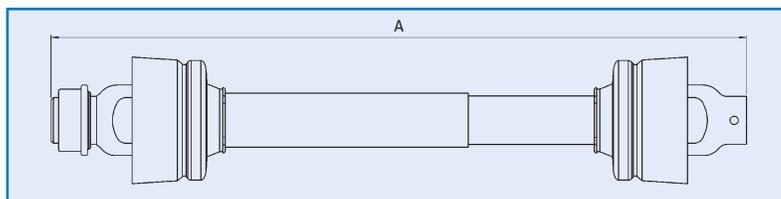


Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C31647	3	1212 mm/47.7"	1 3/8" - 6 Spl. Slide Collar	1 1/2" Rd Bore w/Keyway	880 mm/34.6"	4C3M134	875 mm/34.4"	4C3F634
4C41648	4	1234 mm/48.6"	1 3/8" - 6 Spl. Slide Collar	1 1/2" Rd Bore w/Keyway	880 mm/34.6"	4C4M134	865 mm/34.1"	4C4F634
4C42648	4	1246 mm/49.1"	1 3/8" - 21 Spl. Slide Collar	1 1/2" Rd Bore w/Keyway	880 mm/34.6"	4C4M234	865 mm/34.1"	4C4F634

Disc Mower

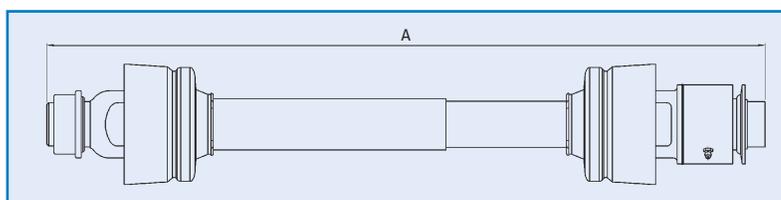

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4F41F38	4	978 mm/38.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/overrunning clutch	580 mm/22.8"	4C4M122	565 mm/22.2"	4F4FF22
4F41F45	4	1128 mm/44.4"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/overrunning clutch	740 mm/29.1"	4C4M129	715 mm/28.1"	4F4FF28


Fertilizer Spreader

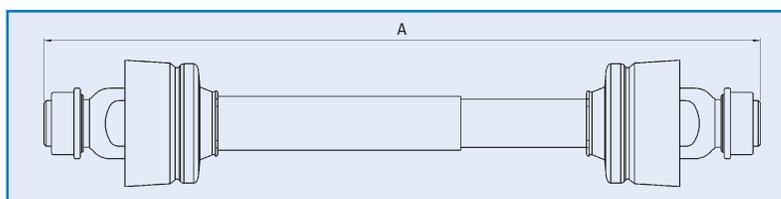

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C11127	1	702 mm/27.6"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	420 mm/16.5"	4C1M116	405 mm/15.9"	4C1F116
4C11135	1	902 mm/35.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	620 mm/24.4"	4C1M124	605 mm/23.8"	4C1F124




Finishing Mower

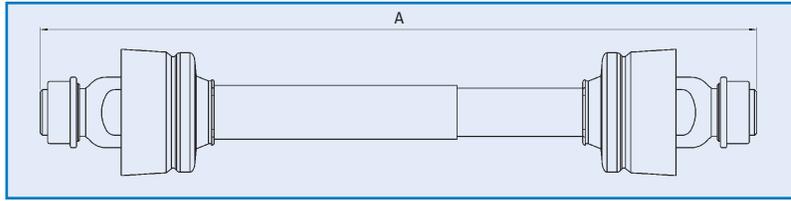


Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C11739	1	984 mm/38.7"	1 3/8" - 6 Spl. Slide Collar	1" Rd Bore w/Pin Hole	720 mm/28.3"	4C1M128	705 mm/27.8"	4C1F728
4C31140	3	1024 mm/40.3"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	680 mm/26.8"	4C3M126	675 mm/26.6"	4C3F126
4C31146	3	1174 mm/46.2"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	840 mm/33.1"	4C3M133	825 mm/32.5"	4C3F132
4C41136	4	934 mm/36.8"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	580 mm/22.8"	4C4M123	565 mm/22.2"	4C4F122

Hammer Mill

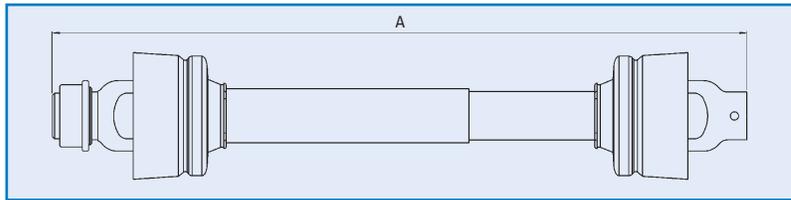

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C41D48	4	1234 mm/48.6"	1 3/8" - 6 Spl. Slide Collar	1 3/4" Rd Bore w/Keyway	880 mm/34.6"	4C4M134	865 mm/34.1"	4C4FD34
4C51D47	5	1211 mm/47.7"	1 3/8" - 6 Spl. Slide Collar	1 3/4" Rd Bore w/Keyway	800 mm/31.5"	4C5M131	795 mm/31.3"	4C5FD31


Hay Tedder

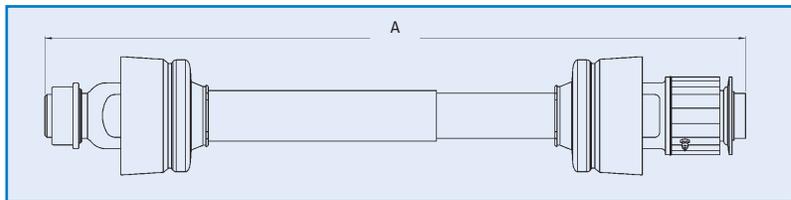

Type	Complete Shaft Part No.	Agmaster Series	Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
2 Rotor	4E21F52	2	1334 mm/52.5"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/radial pin clutch 600 Nm 5300 inlb	1000 mm/39.4"	4C2M139	995 mm/39.2"	4E2FF39
4 Rotor	4E31F54	3	1372 mm/54.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/radial pin clutch 900 Nm 8000 inlb	980 mm/38.6"	4C3M138	975 mm/38.4"	4E3FF38


Replacement Drivelines

Peanut Harvester

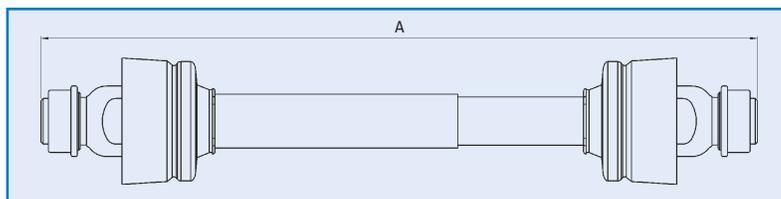

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C53254	5	1376 mm/54.2"	1 3/4" - 20 Spl. Slide Collar	1 3/8" - 21 Spl. Slide Collar	960 mm/37.8"	4C5M338	945 mm/37.2"	4C5F237


Post Hole Digger

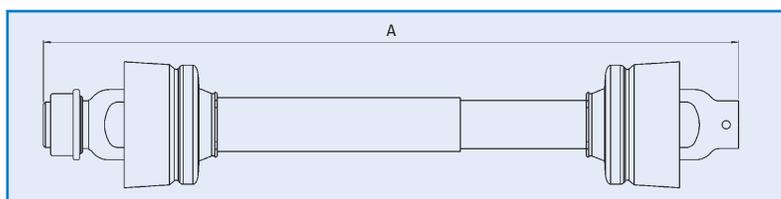

Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4C21948	2	1238 mm/48.7"	1 3/8" - 6 Spl. Slide Collar	1 1/4" Rd Bore w/Keyway	960 mm/37.8"	4C2M138	945 mm/37.2"	4C2F937
4C21452	2	1338 mm/52.7"	1 3/8" - 6 Spl. Slide Collar	1 1/4" Rd Bore w/Pin Hole	1060 mm/41.7"	4C2M141	1045 mm/41.1"	4C2F441
4C31453	3	1362 mm/53.6"	1 3/8" - 6 Spl. Slide Collar	1 1/4" Rd Bore w/Pin Hole	1040 mm/40.9"	4C3M141	1025 mm/40.4"	4C3F440




Rotary Cutter

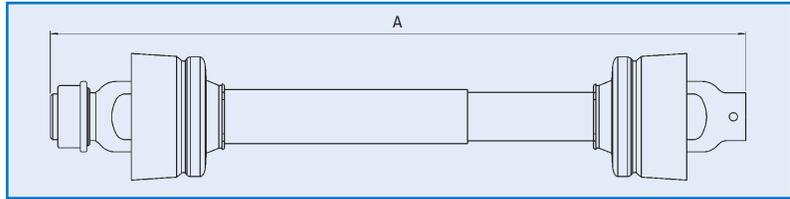

Type	Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
Pull (towed)	4C21551	2	1295 mm/51.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	1000 mm/39.4"	4C2M139	995 mm/39.2"	4C2F539
4 ft. Lift (3-pt. Hitch)	4C31532	3	812 mm/32.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	490 mm/19.3"	4C3M119	475 mm/18.7"	4C3F518
5 ft. Lift (3-pt. Hitch)	4C31536	3	912 mm/35.9"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	580 mm/22.8"	4C3M122	575 mm/22.6"	4C3F522
6 ft. Lift (3-pt. Hitch)	4C31542	3	1062 mm/41.8"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	740 mm/29.1"	4C3M129	725 mm/28.5"	4C3F528
Pull (towed)	4C31551	3	1312 mm/51.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	980 mm/38.6"	4C3M138	975 mm/38.4"	4C3F538
Pull (towed)	4C31152	3	1324 mm/52.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	980 mm/38.6"	4C3M138	975 mm/38.4"	4C3F138
5 & 6 ft. Pull-Type	4C31557	3	1462 mm/57.6"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	1140 mm/44.9"	4C3M144	1125 mm/44.3"	4C3F544
6 ft. Lift (3-pt. Hitch)	4C41542	4	1077 mm/42.4"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	740 mm/29.1"	4C4M129	715 mm/28.1"	4C4F528
6 ft. Heavy Duty	4C41546	4	1177 mm/46.3"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	840 mm/33.1"	4C4M133	815 mm/32.1"	4C4F532
6 ft. Lift (3-pt. Hitch)	4C41550	4	1277 mm/50.3"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	940 mm/37.0"	4C4M137	915 mm/36.0"	4C4F536
7 ft. Lift (3-pt. Hitch)	4C41552	4	1327 mm/52.2"	1 3/8" - 6 Spl. Slide Collar	1 3/8" Rd Bore w/Pin Hole	980 mm/38.6"	4C4M138	965 mm/38.0"	4C4F538


Rotary Cutter - Tiller

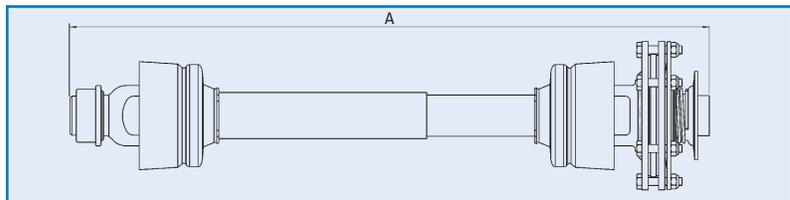

Type	Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
Pull (towed)	4D21F33	2	841 mm/ 33.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/friction clutch 800Nm 7100 in lb	500 mm/ 19.7"	4C2M119	495 mm/ 19.5"	4D2FF19
Pull (towed)	4D31F36	3	915 mm/ 36.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/friction clutch 1000 Nm 8900 in lb	540 mm/ 21.3"	4C3M121	525 mm/ 20.7"	4D3FF20
Pull (towed)	4D31F38	3	965 mm/ 38.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/friction clutch 1000 Nm 8900 in lb	580 mm/ 22.8"	4C3M122	575 mm/ 22.6"	4D3FF22
Pull (towed)	4D41F46	4	1174 mm/ 46.2"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/friction clutch 1350 Nm 11900 in lb	780 mm/ 30.7"	4C4M130	765 mm/ 30.1"	4D4FF30
7 ft. Lift (3-pt. Hitch)	4D41F54	4	1374 mm/ 54.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline OD w/friction clutch 1350 Nm 11900 in lb	980 mm/ 38.6"	4C4M138	965 mm/ 38.0"	4D4FF38
7 ft. Lift (3-pt. Hitch)	4D41G60	4	1519 mm/ 59.8"	1 3/8" - 6 Spl. Slide Collar	1 3/4" - 20 Spline CC w/friction clutch 1500 Nm 13300 in lb	1060 mm/ 41.7"	4C4M141	1045 mm/ 41.1"	4D4FG41
7 ft. Lift (3-pt. Hitch)	4D43G60	4	1533 mm/ 60.4"	1 3/4" - 20 Spl. Slide Collar	1 3/4" - 20 Spline CC w/friction clutch 1500 Nm 13300 in lb	1060 mm/ 41.7"	4C4M341	1045 mm/ 41.1"	4D4FG41


Replacement Drivelines

Complete

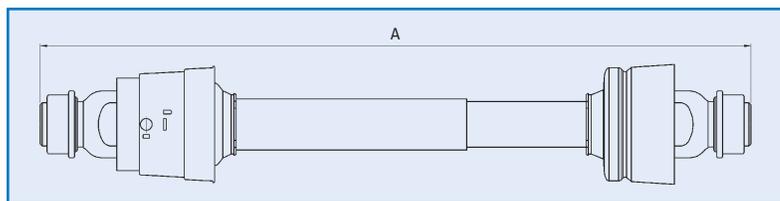

Complete Shaft Part No.	Agmaster Series	Compressed Length "A"	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G31156	380	1424 mm/56.1"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	980 mm/38.6"	4G3M138	980 mm/38.6"	4C3C138
4G41157	480	1440 mm/56.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	980 mm/38.6"	4G4M138	965 mm/38.0"	4C4C138
4G51140	580	1042 mm/41.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	500 mm/19.7"	4G5M119	480 mm/18.9"	4C5F119
4G51158	580	1492 mm/58.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar	940 mm/37.0"	4G5M137	930 mm/36.6"	4C5F136


Without Implement Yoke

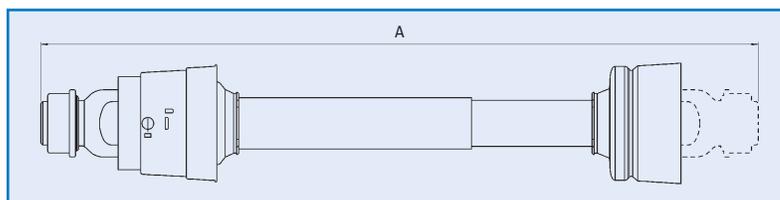

Complete Shaft Part No.	Agmaster Series	Compressed Length "A"	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G31056	380	1424 mm/56.1"	1 3/8" - 6 Spl. Slide Collar	*	980 mm/38.6"	4G3M138	980 mm/38.6"	4C3C038
4G41057	480	1440 mm/56.7"	1 3/8" - 6 Spl. Slide Collar	*	980 mm/38.6"	4G4M138	965 mm/38.0"	4C4C038
4G51058	580	1492 mm/58.7"	1 3/8" - 6 Spl. Slide Collar	*	940 mm/37.0"	4G5M137	930 mm/36.6"	4C5F036

*Driveline supplied without cross & bearing kit and implement yoke. Add cross & bearing kit and yoke as required.


Beet Harvester

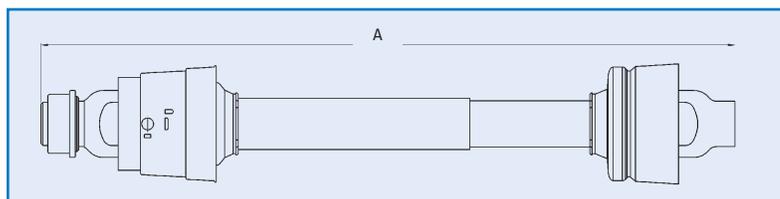

Complete Shaft Part No.	Agmaster Series	Compressed Length "A"	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G52C62	580	1585 mm/62.4"	1 3/8" - 21 Spl. Slide Collar	1 3/4" Rd Bore w/Keyway	1040 mm/40.9"	4G5M240	1030 mm/40.6"	4C5FC40
4G53C62	580	1577 mm/62.1"	1 3/4" - 20 Spl. Slide Collar	1 3/4" Rd Bore w/Keyway	1040 mm/40.9"	4G5M340	1030 mm/40.6"	4C5FC40




Round Baler

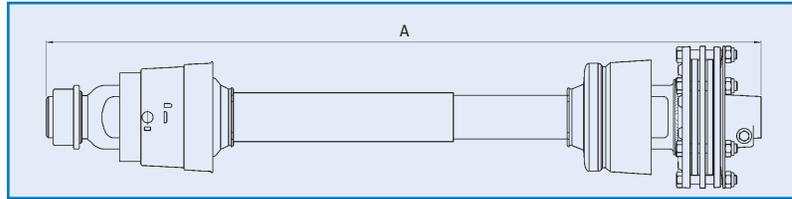


Complete Shaft Part No.	Agmaster Series	Compressed Length "A"	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G41158	480	1490 mm/58.7"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spl. Slide Collar no clutch	1020 mm/40.2"	4G4M140	1015 mm/40.0"	4C4C140
4H41M58	480	1525 mm/60.0"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline CC w/friction clutch - 1500 Nm 13300 in lb	980 mm/38.6"	4G4M138	965 mm/38.0"	4C4CM38
4H42M58	480	1533 mm/60.4"	1 3/8" - 21 Spl. Slide Collar	1 3/8" - 6 Spline CC w/friction clutch - 1500 Nm 13300 inlb	980 mm/38.6"	4G4M238	965 mm/38.0"	4C4CM38

Peanut Harvester

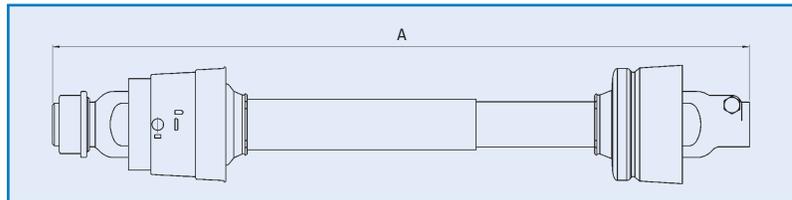


Complete Shaft Part No.	Agmaster Series	Compressed Length "A"	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G52K55	580	1435 mm/56.5"	1 3/8" - 21 Spl. Slide Collar	1 3/8" - 21 Spline Clamp	900 mm/35.4"	4G5M235	880 mm/34.6"	4C5FK34
4G52E55	580	1427 mm/56.2"	1 3/8" - 21 Spl. Slide Collar	1 3/8" - 21 Spline w/pinhole	900 mm/35.4"	4G5M235	880 mm/34.6"	4C5FE34
4G53K55	580	1427 mm/56.2"	1 3/4" - 20 Spl. Slide Collar	1 3/8" - 21 Spline Clamp	900 mm/35.4"	4G5M335	880 mm/34.6"	4C5FK34
4G53E55	580	1419 mm/55.9"	1 3/4" - 20 Spl. Slide Collar	1 3/8" - 21 Spline w/pinhole	900 mm/35.4"	4G5M335	880 mm/34.6"	4C5FE34

Flex-Wing Mower

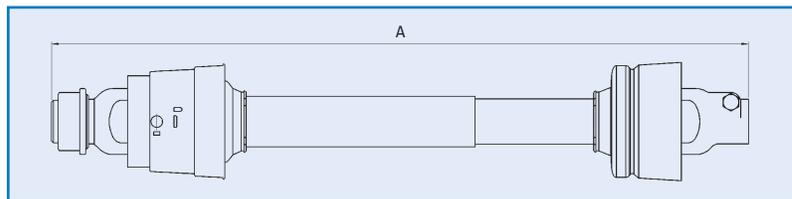


Complete Shaft Part No.	Agmaster Series	"A" Compressed Length	Tractor Yoke	Implement Yoke	Tractor Half Profile Length	Tractor Half Part No.	Implement Half Profile Length	Implement Half Part No.
4G51L51	580	1342 mm/52.8"	1 3/8" - 6 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	800 mm/31.5"	4G5M131	780 mm/30.7"	4C5FL30
4G52L51	580	1350 mm/53.1"	1 3/8" - 21 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	800 mm/31.5"	4G5M231	780 mm/30.7"	4C5FL30
4G53L51	580	1342 mm/52.8"	1 3/4" - 20 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	800 mm/31.5"	4G5M331	780 mm/30.7"	4C5FL30
4G51J55	580	1442 mm/56.8"	1 3/8" - 6 Spl. Slide Collar	1 3/8" - 6 Spline Clamp	900 mm/35.4"	4G5M135	880 mm/34.6"	4C5FJ34
4G52J55	580	1450 mm/57.1"	1 3/8" - 21 Spl. Slide Collar	1 3/8" - 6 Spline Clamp	900 mm/35.4"	4G5M235	880 mm/34.6"	4C5FJ34
4G53J55	580	1442 mm/56.8"	1 3/4" - 20 Spl. Slide Collar	1 3/8" - 6 Spline Clamp	900 mm/35.4"	4G5M335	880 mm/34.6"	4C5FJ34
4G51L55	580	1442 mm/56.8"	1 3/8" - 6 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	900 mm/35.4"	4G5M135	880 mm/34.6"	4C5FL34
4G52L55	580	1450 mm/57.1"	1 3/8" - 21 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	900 mm/35.4"	4G5M235	880 mm/34.6"	4C5FL34
4G53L55	580	1442 mm/56.8"	1 3/4" - 20 Spl. Slide Collar	1 3/4" - 20 Spline Clamp	900 mm/35.4"	4G5M335	880 mm/34.6"	4C5FL34

Constant Velocity Drivelines & CV Components

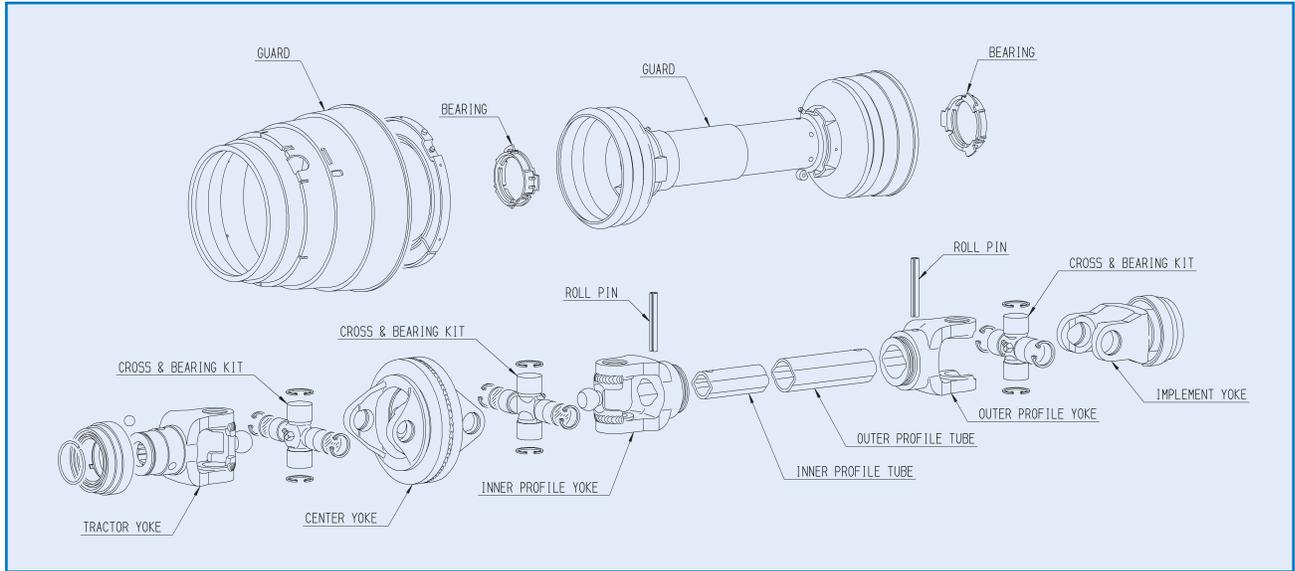


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4A31806	1 3/8" - 6 Spl.
4A31821	1 3/8" - 21 Spl.

Center Yoke




Part Number
4A31700

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"	Dim. "C"	Dim. "D"
4A32800	mm: 74.6 in: 2 15/16"	mm: 91.0 in: 3 37/64"	mm: 23.8 in: 15/16"	mm: 27.0 in: 1 1/16"


Inner Profile Yoke



Part Number	Dim. "A" Bore
	mm in
4A33102	34.5 1 23/64"




Roll Pin



Part Number	Dim. "A"		Dim. "B"	
	mm	in	mm	in
4205065	10.0	25/64"	65.0	2 9/16"

Outer Profile Yoke



Part Number	Dim. "A" mm	Bore in
4A37100	41.2	1 5/8"

Inner Profile Tube (Coated)



Part Number	Dim. "A" mm	Length	
		mm	in
4204510	34.5 (4.0 Wall)	1000	39 3/8"

Guard/Shield

Shielding Kit



Part Number	Overall Driveline Length	Use With Profile Pair
4209548	48" (1220 mm)	34.5 mm/41.0 mm

Order bearing kit when ordering new guards.

Outer Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4206510	41.0 (2.7 Wall)	1000	39 3/8"

Bearing Kit

Part Number	Type	Use With Profile Pair
4209101	2 bearings per kit	34.5 mm/41.0 mm


Implement Yoke

See Agmaster Series 3

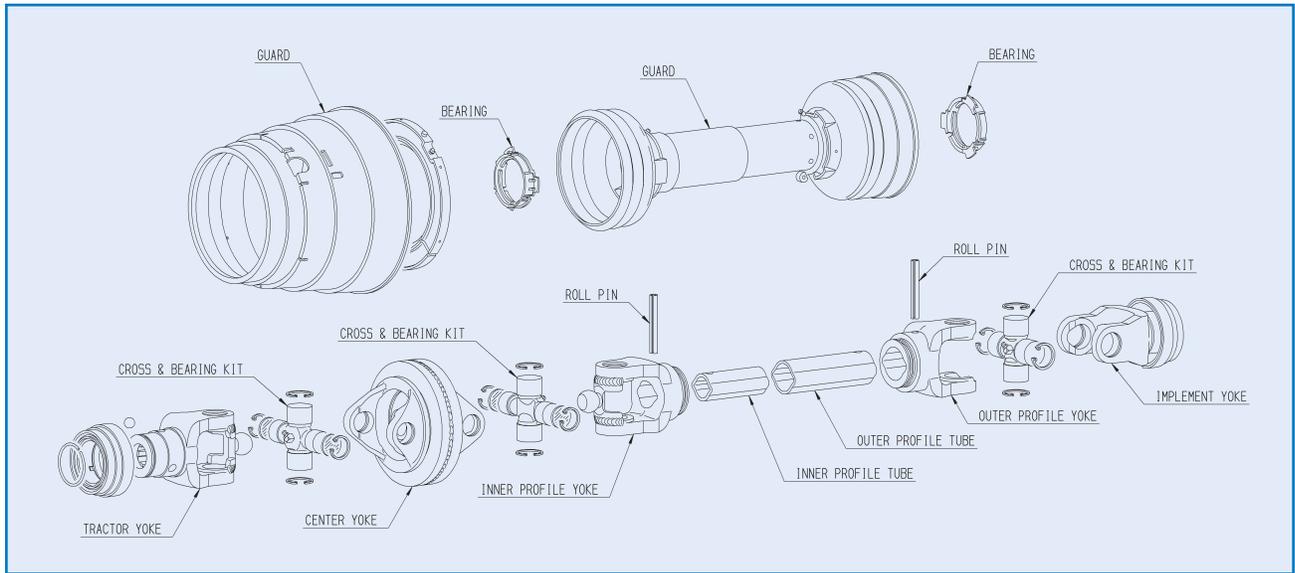


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4A41806	1 3/8" - 6 Spl.
4A41821	1 3/8" - 21 Spl.
4A41820	1 3/4" - 20 Spl.

Center Yoke




Part Number
4A41700

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"	Dim. "C"	Dim. "D"
4A42800	mm: 76.0 in: 2 63/64"	mm: 94.0 in: 3 45/64"	mm: 27.0 in: 1 1/16"	mm: 32.0 in: 1 7/64"


Inner Profile Yoke



Part Number	Dim. "A" Bore
4A43202	mm: 39.5 in: 1 9/16"



Roll Pin



Part Number	Dim. "A"		Dim. "B"	
	mm	in	mm	in
4205080	10.0	25/64"	80.0	3 5/32"

Inner Profile Tube (Coated)



Part Number	Dim. "A" mm	Length	
		mm	in
4204610	39.5 (4.5 Wall)	1000	39 3/8"

Outer Profile Tube



Part Number	Dim. "A"	Length	
		mm	in
4206610	48.0 (3.5 Wall)	1000	39 3/8"


Outer Profile Yoke



Part Number	Dim. "A" mm	Bore in
4A47200	48.0	1 57/64"

Guard/Shield

Shielding Kit



Part Number	Overall Driveline Length
4209648	48" (1220 mm)
4209660	60" (1524 mm)


Order bearing kit when ordering new guards.

Bearing Kit

Part Number	Type
4209202	2 bearings per kit


Implement Yoke

See Agmaster Series 4

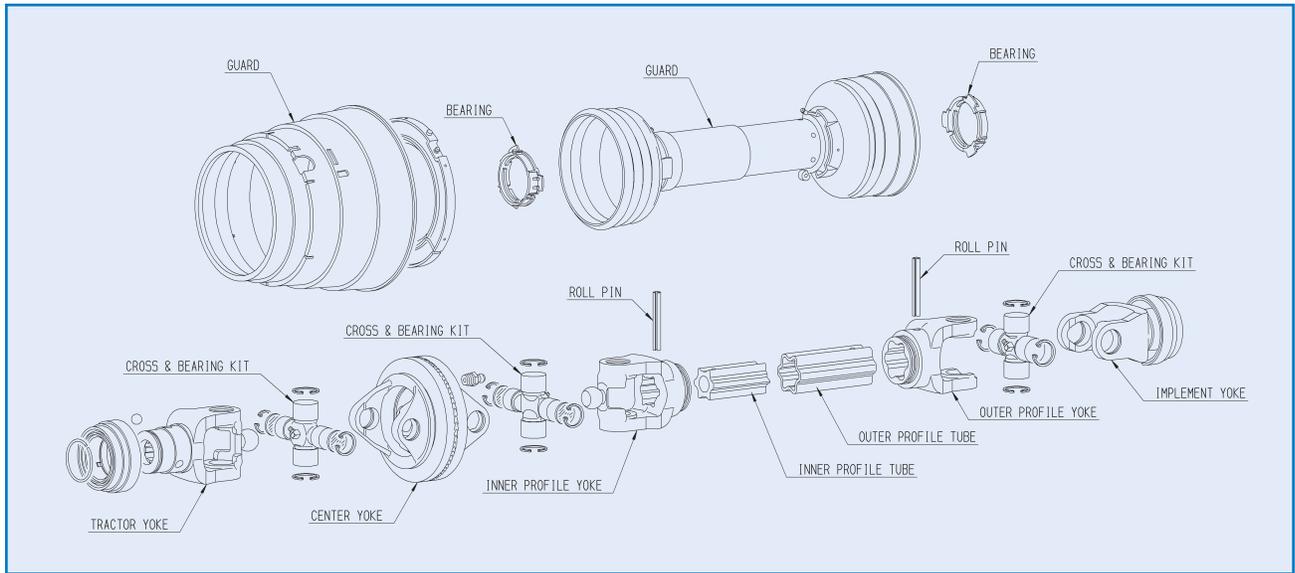


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4A51806	1 3/8" - 6 Spl.
4A51821	1 3/8" - 21 Spl.
4A51820	1 3/4" - 20 Spl.

Center Yoke




Part Number
4A51700

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"	Dim. "C"	Dim "D"
4A52800	mm: 89.0 in: 3 1/2"	mm: 106.0 in: 4 11/64"	mm: 32.0 in: 1 17/64"	mm: 36.0 in: 1 27/64"


Inner Profile Yoke



Part Number	Dim. "A" Bore
4A53302	mm: 51.0 in: 2"



Roll Pin



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4205075	10.0	25/64"	75.0	2 61/64"
4205090	10.0	25/64"	90.0	3 35/64"

Inner Profile Tube (Coated)




Part Number	Dim. "A" mm	Length mm	in
4204710	51.0	1000	39 3/8"

Outer Profile Tube



Part Number	Dim. "A" mm	Length mm	in
4206310	61.0 (4.5 Wall)	1000	39 3/8"

Outer Profile Yoke



Part Number	Dim. "A" mm	Bore in
4A57300	61.0	2 13/32"

Guard/Shield

Shielding Kit



Part Number	Overall Driveline Length
4209748	48" (1220 mm)
4209760	60" (1524 mm)

Order bearing kit when ordering new guards.


Bearing Kit

Part Number	Type
4209202	2 bearings per kit

Implement Yoke

See Agmaster Series 5

Friction Clutches

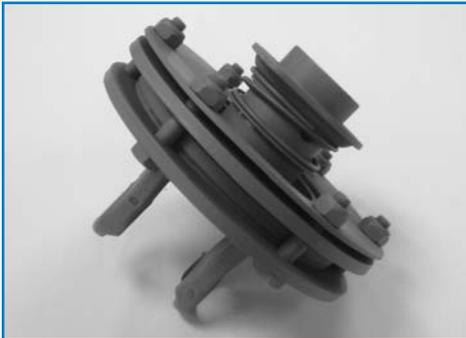

Purpose: Friction Clutches can be used as a start-up clutch for accelerating large masses; short-term peak torques are limited without interrupting work.

Features: Easily serviceable - Friction Clutches are serviced by replacing friction discs.

Typical Applications: Mowers, rotary cultivators, rotary cutters, combine headers, grain carts, tillers, trenchers, big balers, fans, forage harvesters, etc.

Radial Pin Clutches



Purpose: Interrupts the power flow in the event of overloading with a pulsating torque that can be used to clear the machine.

Features: Minimal maintenance is required for Radial Pin Clutches; emits an audible warning when the clutch is slipping.

Typical Applications: Rotary tedders/windrowers, pick-ups, post hole diggers, feedroll drives, combine heads, sugar beet and potato harvesters, individual protection in corn headers, protection of feeders/conveyors in cutting sections, etc.

Clutches are recommended for use on implement end only.

Overrunning Clutches



Purpose: Overrunning Clutches protect the drive against the effects of rotating masses; no overload protection.

Features: Low maintenance clutch.

Typical Applications: Mowers, fans, forage harvesters, balers, flail shredders, potato harvesters, etc.



Shear Bolt Clutches



Purpose: Completely interrupts the flow of power.


Features: Ease of service - Shear Bolt Clutches are serviced by replacing the shear bolt.

Typical Applications: Liquid manure pumps, manure spreaders, grain carts, mixers, economy balers, snow blowers, etc.




Clutches are recommended for use on implement end only.

Friction 2 Plate Quick Disconnect Style

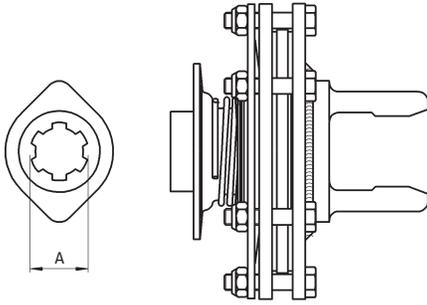


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4220300	800	7100	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230300	800	7100	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4230301	1000	8900	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240301	1000	8900	1 3/8" - 6 QD	WAL2400 / AGM4
4240302	1350	11900	1 3/8" - 6 QD	WAL2400 / AGM4
4140301	800	7100	1 3/8" - 6 QD	Weasler 14
4140302	1000	8900	1 3/8" - 6 QD	Weasler 14
4350301	1000	8900	1 3/8" - 6 QD	Weasler 35
4350302	1350	11900	1 3/8" - 6 QD	Weasler 35

Friction 4 Plate Clamp Cone Style

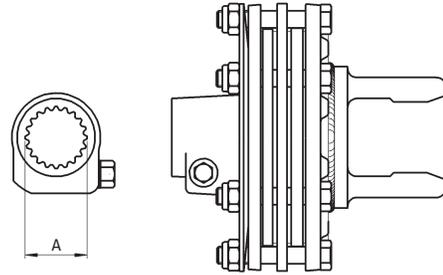


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4240306	1500	13300	1 3/8" - 6 CC	WAL2400 / AGM4
4240305	1500	13300	1 3/4" - 20 CC	WAL2400 / AGM4
4250303	1000	8900	1 3/4" - 20 CC	WAL2500 / AGM5
4250304	1200	10600	1 3/4" - 20 CC	WAL2500 / AGM5
4250305	1500	13300	1 3/4" - 20 CC	WAL2500 / AGM5

Radial Pin Quick Disconnect Style

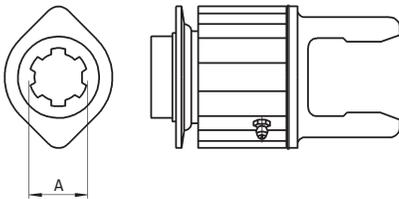


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4210200	300	2700	1 3/8" - 6 QD	WAL2100 / AGM1
4220201	600	5300	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230202	900	8000	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240203	1200	10600	1 3/8" - 6 QD	WAL2400 / AGM4

Overrunning Quick Disconnect Style

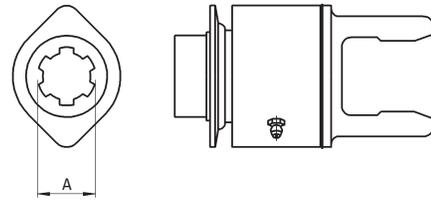


Part Number	Dim. "A" Bore	Interchanges With
4210000	1 3/8" - 6 QD	WAL2100 / AGM1
4220000	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230000	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240000	1 3/8" - 6 QD	WAL2400 / AGM4

Overrunning Clamp Style

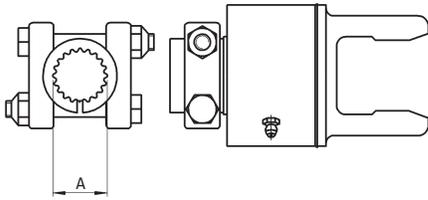


Part Number	Dim. "A" Bore	Interchanges With
4250002	1 3/4" - 20 Clamp	WAL2500 / AGM5

Shear Bolt Quick Disconnect Style (Light Duty)

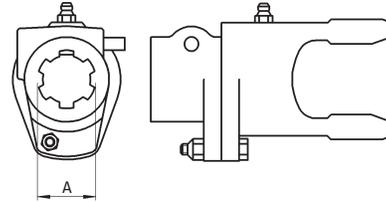


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4220100	780	6900	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4220101	910	8100	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2

Shear Bolt Clamp Style

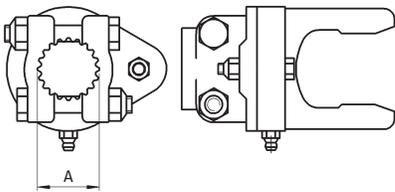


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4250105	4200	37200	1 3/4" - 20 Clamp	WAL2500 / AGM5

Shear Bolt Quick Disconnect Style

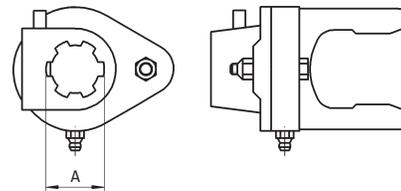


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4230102	1220	10800	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4230103	1860	16500	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240103	1860	16500	1 3/8" - 6 QD	WAL2400 / AGM4
4240104	2920	25800	1 3/8" - 6 QD	WAL2400 / AGM4
4250104	2920	25800	1 3/8" - 6 QD	WAL2500 / AGM5
4140100	1621	14300	1 3/8" - 6 QD	Weasler 14
4350100	2334	20700	1 3/8" - 6 QD	Weasler 35

Quick Disconnect Style




Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4220300	800	7100	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230300	800	7100	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4230301	1000	8900	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240301	1000	8900	1 3/8" - 6 QD	WAL2400 / AGM4
4240302	1350	11900	1 3/8" - 6 QD	WAL2400 / AGM4
4140301	800	7100	1 3/8" - 6 QD	Weasler 14
4140302	1000	8900	1 3/8" - 6 QD	Weasler 14
4350301	1000	8900	1 3/8" - 6 QD	Weasler 35
4350302	1350	11900	1 3/8" - 6 QD	Weasler 35

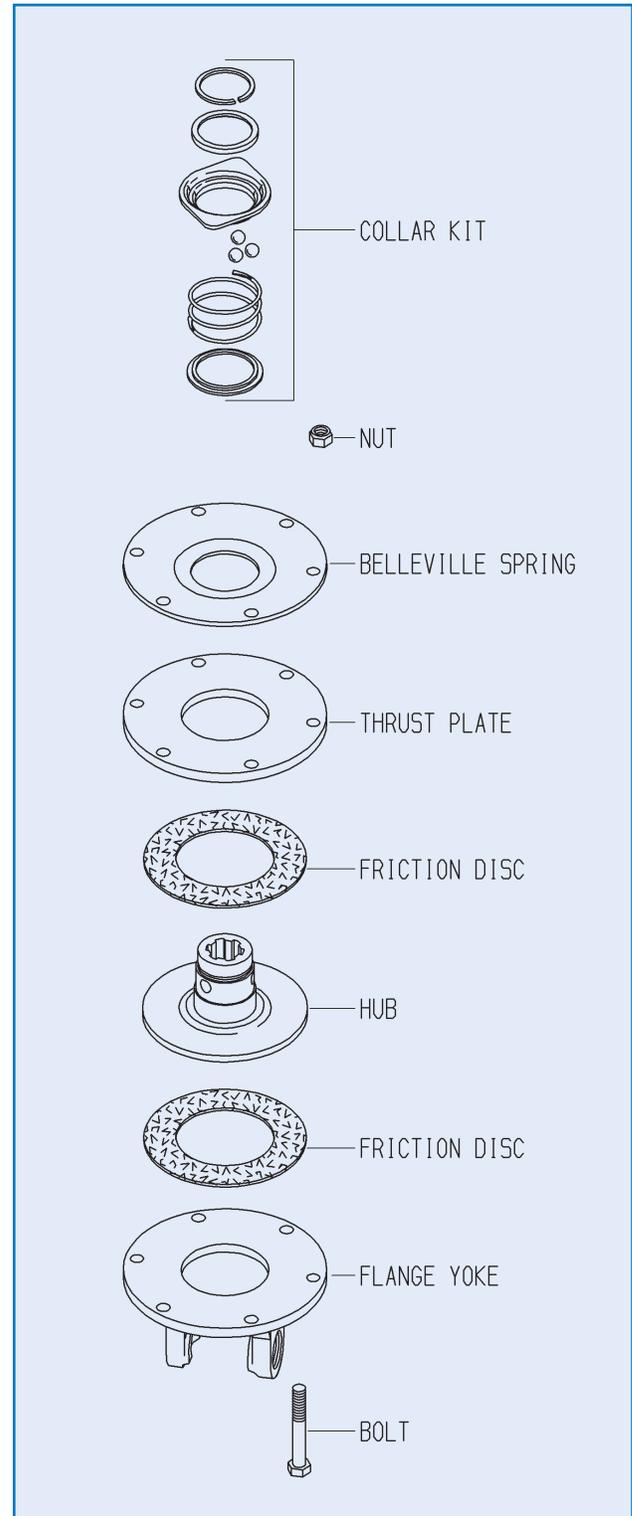




Collar Kit



Part Number	Type
4200040	Quick Disconnect Components

Hub




Part Number	Type
4200330	1 3/8" - 6 QD
4200333	1 3/8" - 21 QD

Belleville Spring



Part Number	Torque	
	Nm	in lb
4200350	800	7100
4200351	1000/1350	8900/11900

Flange Yoke




Part Number	Interchanges with
4220322	WAL2200 / AGM2 / BYPY2
4230323	WAL2300 / AGM3 / BYPY4
4240324	WAL2400 / AGM4
4140322	Weasler 14
4350323	Weasler 35

Thrust Plate



Part Number	Type
4200355	Thrust plate

Bolt/Nut Kit




Part Number	Type
4200342	Bolts/Nuts (6 each) M10x50

Friction Disc Kit




Part Number	Type
4200340	Friction Discs (2)

Clamp Cone Style

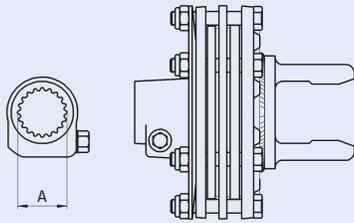

Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4240306	1500	13300	1 3/8" - 6 CC	WAL2400 / AGM4
4240305	1500	13300	1 3/4" - 20 CC	WAL2400 / AGM4
4250303	1000	8900	1 3/4" - 20 CC	WAL2500 / AGM5
4250304	1200	10600	1 3/4" - 20 CC	WAL2500 / AGM5
4250305	1500	13300	1 3/4" - 20 CC	WAL2500 / AGM5

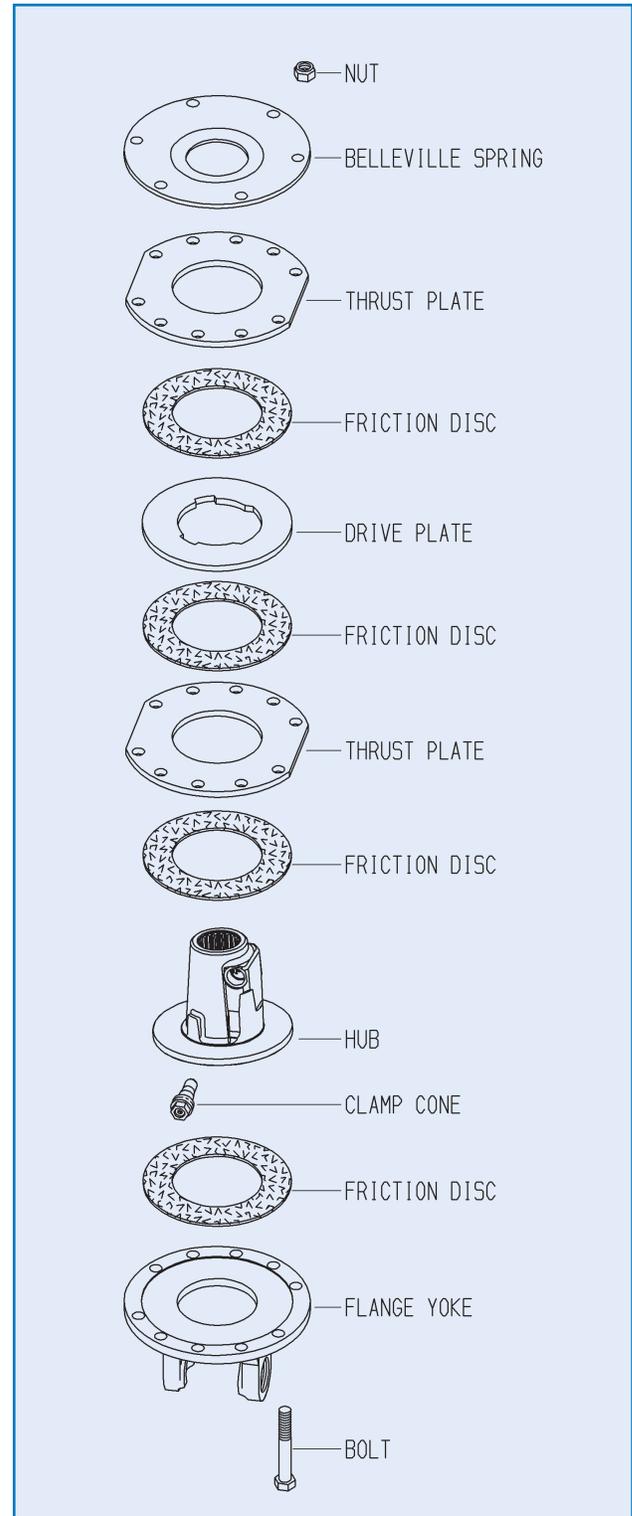




Belleville Spring



Part Number	Torque	
	Nm	in lb
4200352	1000	8900
4200353	1200	10600
4200354	1500	13300

Hub



Part Number	Type
4200331	1 3/8" - 6 CC
4200332	1 3/4" - 20 CC

Thrust Plate



Part Number	Type
4200356	Thrust plate

Clamp Cone



Part Number	Type
4200358	For 1 3/8" Bore
4200359	For 1 3/4" Bore

Friction Disc Kit



Part Number	Type
4200340	Friction Discs (2)

Flange Yoke




Part Number	Interchanges With
4240326	WAL2400 / AGM4
4250325	WAL2500 / AGM5

Drive Plate




Part Number	Type
4200357	Drive plate

Bolt/Nut Kit




Part Number	Type
4200343	Bolts/Nuts (6 each) M12x85

Quick Disconnect Style

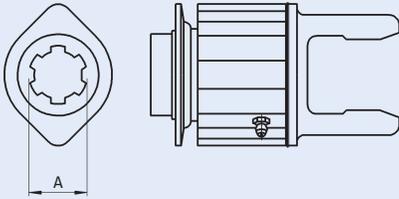


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4210200	300	2700	1 3/8" - 6 QD	WAL2100 / AGM1
4220201	600	5300	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230202	900	8000	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240203	1200	10600	1 3/8" - 6 QD	WAL2400 / AGM4

Collar Kit




Part Number	Type
4200040	Quick Disconnect Components

Service Kit




Part Number	Type
4200241	Internal Components

Hub




Part Number	Size	Type
4200231	1 Row	1 3/8" - 6 QD
4200232	2 Row	1 3/8" - 6 QD
4200233	3 Row	1 3/8" - 6 QD
4200234	4 Row	1 3/8" - 6 QD

Cam/Spring Kit

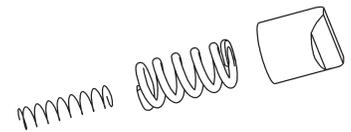


Part Number	Type
4200240	Cams/Springs (8 each)

Housing




Part Number	Type	Interchanges With
4210221	1 Row	WAL2100 / AGM1
4220222	2 Row	WAL2200 / AGM2 / BYPY2
4230223	3 Row	WAL2300 / AGM3 / BYPY4
4240224	4 Row	WAL2400 / AGM4

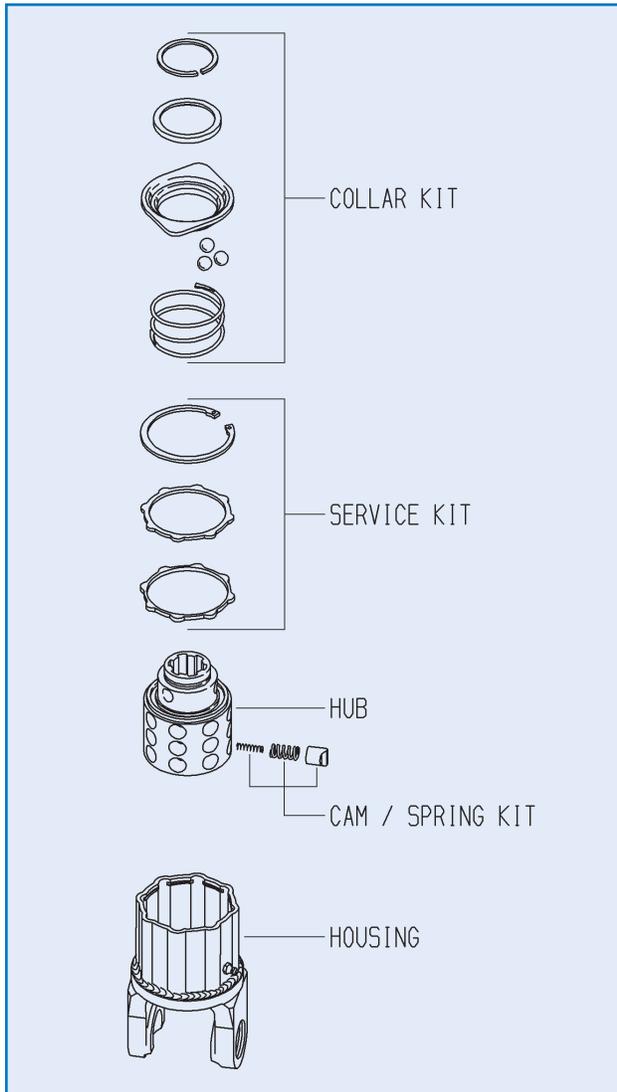




Quick Disconnect Style

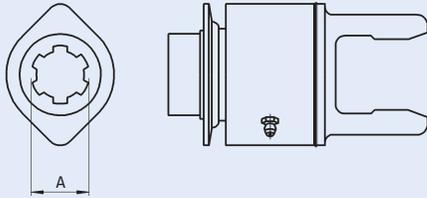


Part Number	Dim "A" Bore	Interchanges With
4210000	1 3/8" - 6 QD	WAL2100 / AGM1
4220000	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4230000	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240000	1 3/8" - 6 QD	WAL2400 / AGM4

Collar Kit




Part Number	Type
4200040	Quick Disconnect Components


Service Kit



Part Number	Type
4200041	Internal Components

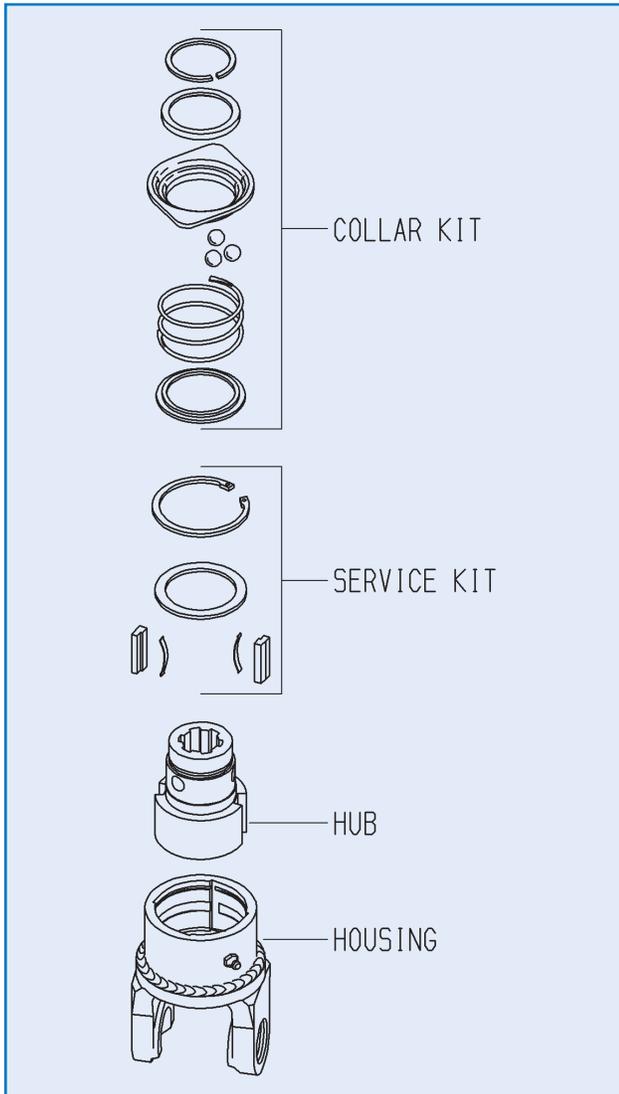


Hub




Part Number	Type
4200030	1 3/8" - 6 QD
4200031	1 3/8" - 21 QD

Housing




Part Number	Interchanges With
4210021	WAL2100 / AGM1
4220022	WAL2200 / AGM2 / BYPY2
4230023	WAL2300 / AGM3 / BYPY4
4240024	WAL2400 / AGM4

Clamp Style

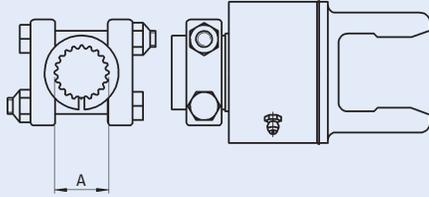


Part Number	Dim. "A" Bore	Interchanges With
4250002	1 3/4" - 20 Clamp	WAL2500 / AGM5

Clamp Kit







Part Number	Type
4200044	1 3/4" - 20 Clamp Components


Service Kit



Part Number	Type
4200042	Internal Components

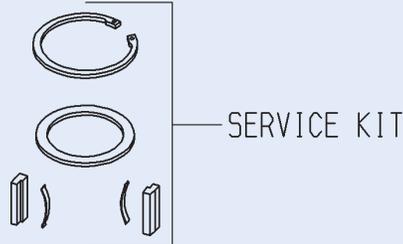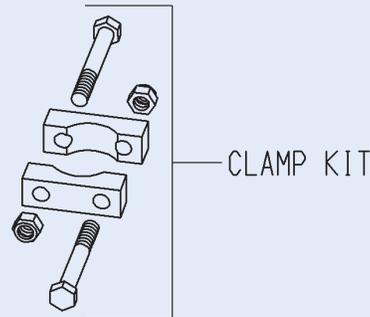


Hub



Part Number	Type
4200033	1 3/4" - 20 Clamp


Housing



Part Number	Interchanges With
4250025	WAL2500 / AGM5




Quick Disconnect Style

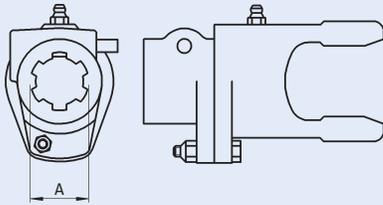

Part Number	Torque		Dim. "A"	Bore	Interchanges With
	Nm	in lb			
4220100	780	6900	1 3/8" - 6 QD	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2
4220101	910	8100	1 3/8" - 6 QD	1 3/8" - 6 QD	WAL2200 / AGM2 / BYPY2


Hub



Part Number	Dim. "R"	For Bolt Size	Bore
4200130	42 mm	M6/M8	1 3/8" - 6 QD


Dimension R: center of spline bore to center of shear bolt hole.

Grease Zerk



Part Number	Size
4200150	M10


Shear Yoke




Part Number	Dim. "R"	For Bolt Size	Interchanges With
4220120	42 mm	M6	WAL2200 / AGM2 / BYPY2
4220121	42 mm	M8	WAL2200 / AGM2 / BYPY2

Dimension R: center of spline bore to center of shear bolt hole.


Shear Bolt Kit




Part Number	Type
4200141	Bolt/Nut (1 each) M6x35
4200143	Bolt/Nut (1 each) M8x35

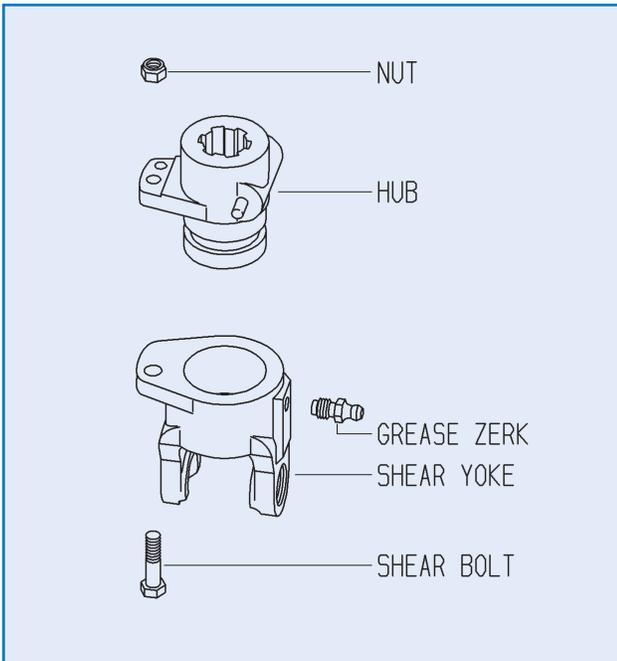


Clamp Style

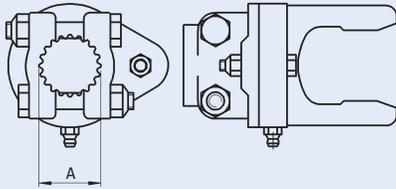

Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4250105	4200	37200	1 3/4" - 20 Clamp	WAL2500 / AGM5

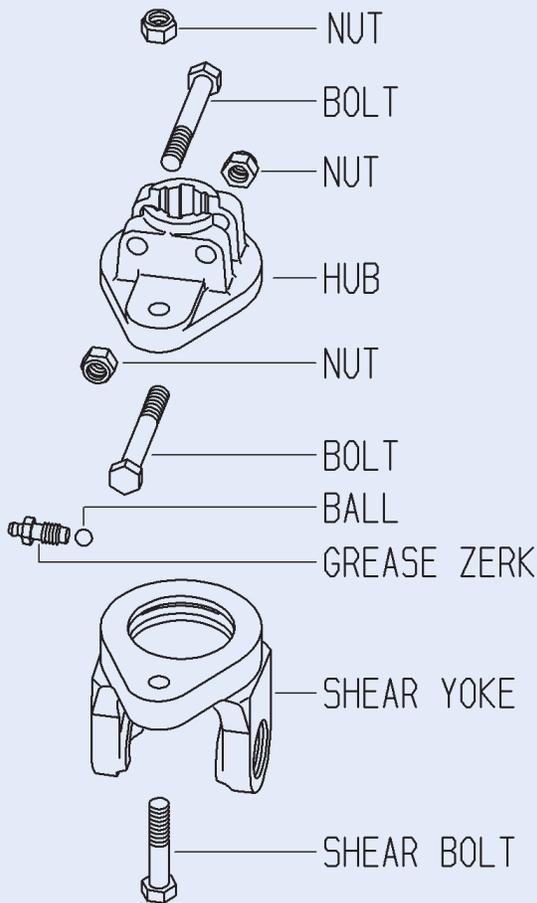


Clamp Bolt Kit



Part Number	Type
4200149	Bolts/Nuts (2 each) M16x80

Hub



Part Number	Dim. "R"	For Bolt Size	Type
4200134	56mm	M12	1 3/4" - 20 Clamp

Dimension R: center of spline bore to center of shear bolt hole.

Ball Kit


Part Number	Type
4200140	Ball Bearings (Qty 24)

Grease Zerk



Part Number	Size
4200150	M10


Shear Yoke



Part Number	Dim. "R"	For Bolt Size	Interchanges With
4250127	56 mm	M12	WAL2500 / AGM5

Dimension R: center of spline bore to center of shear bolt hole.


Shear Bolt Kit



Part Number	Type
4200148	Bolt/Nut (1 each) M12x60



Quick Disconnect Style

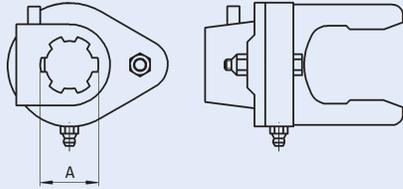


Part Number	Torque		Dim. "A" Bore	Interchanges With
	Nm	in lb		
4230102	1220	10800	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4230103	1860	16500	1 3/8" - 6 QD	WAL2300 / AGM3 / BYPY4
4240103	1860	16500	1 3/8" - 6 QD	WAL2400 / AGM4
4240104	2920	25800	1 3/8" - 6 QD	WAL2400 / AGM4
4250104	2920	25800	1 3/8" - 6 QD	WAL2500 / AGM5
4140100	1621	14300	1 3/8" - 6 QD	Weasler 14
4350100	2334	20700	1 3/8" - 6 QD	Weasler 35

Ball Kit


Part Number	Type
4200140	Ball Bearings (Qty. 24)

Grease Zerk




Part Number	Size
4140150	3/8" (14 series only)
4200150	M10

Shear Yoke




Part Number	Dim. "R"	For Bolt Size	Interchanges With
4230122	48 mm	M7	WAL2300 / AGM3 / BYPY4
4230123	56 mm	M8	WAL2300 / AGM3 / BYPY4
4240124	56 mm	M8	WAL2400 / AGM4
4240125	56 mm	M10	WAL2400 / AGM4
4250126	56 mm	M10	WAL2500 / AGM5
4140120	2.00"	5/16"	Weasler 14
4350121	2.00"	3/8"	Weasler 35

Dimension R: center of spline bore to center of shear bolt hole.

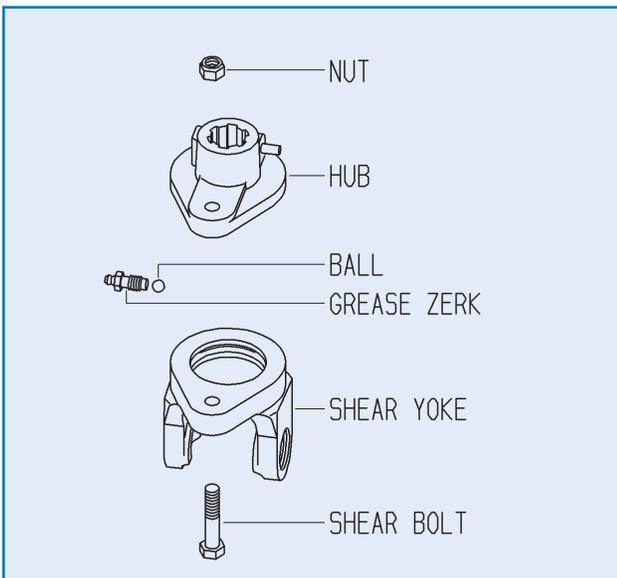


Hub



Part Number	Dim. "R"	For Bolt Size	Type
4200131	48 mm	M7	1 3/8" - 6 QD
4200132	56 mm	M8	1 3/8" - 6 QD
4200133	56 mm	M10	1 3/8" - 6 QD
4140130	2.00"	5/16"	1 3/8" - 6 QD
4350131	2.00"	3/8"	1 3/8" - 6 QD

Dimension R: center of spline bore to center of shear bolt hole.

Shear Bolt Kit




Part Number	Type
4200142	Bolt/Nut (1 each) M7x50
4200145	Bolt/Nut (1 each) M8x50
4200146	Bolt/Nut (1 each) M8x60
4200147	Bolt/Nut (1 each) M10x60
4200148	Bolt/Nut (1 each) M12x60
4140140	Bolt/Nut (1 each) 5/16"x2.25"
4350141	Bolt/Nut (1 each) 3/8"x2.25"

Miscellaneous Clutch Components

Friction Disc Kits (2 per)




Part Number	O.D.		I.D.	
	mm	in	mm	in
4200345	90	3.5	56	2.2
4200360	122	4.8	67	2.6
4200365	133	5.3	89	3.5
4200348	140	5.5	85	3.3
4200361	141	5.6	77	3.0
4200340	150	5.9	91	3.6
4200341	157	6.2	100	3.9
4200347	160	6.3	97	3.8
4200363	160	6.3	100	3.9
4200362	162	6.4	85	3.3
4200364	162	6.4	105	4.1
4200346	185	7.3	120	4.7
4200344	202	8.0	140	5.5

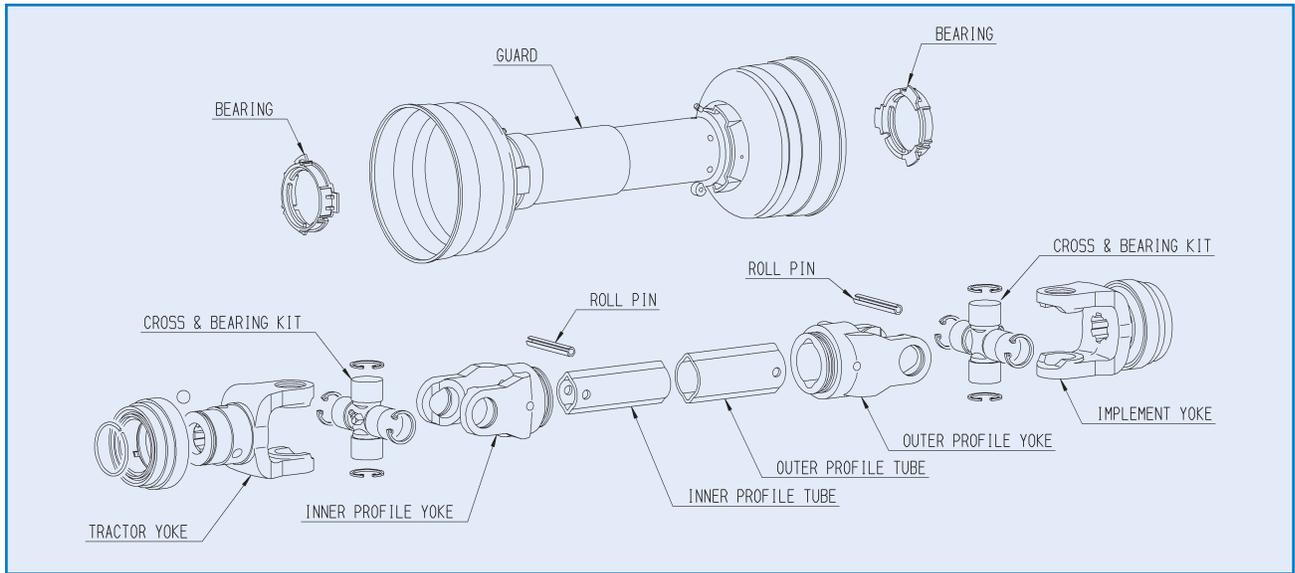


Tractor Yoke

Slide Collar



Part Number	Dim. "A" Bore
4A11306	1 3/8" - 6 Spl.
4A11321	1 3/8" - 21 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4A11006	1 3/8" - 6 Spl.
4A11021	1 3/8" - 21 Spl.

Service Pin Kit

Part Number	Yoke Bore Size
4000110	1 3/8"

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim "B" mm	in
4A12000	22.0	7/8"	54.8	2 5/32"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4A13000	23.7	15/16"



Roll Pin



Part Number	Dim. "A"		Dim. "B"	
	mm	in	mm	in
4205850	8.0	5/16"	50.0	1 31/32"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4204010	23.5 (3.4 Wall)	1000	39 3/8"
4204015	23.5 (3.4 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4206010	30.0 (2.8 Wall)	1000	39 3/8"
4206015	30.0 (2.8 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" Bore	
	mm	in
4A17000	30.0	1 3/16"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" Bore	
	mm	in
4A18225	25.0	—
4A18216	—	1"
4A18230	30.0	—
4A18220	—	1 1/4"

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore mm	Standard Keyway mm
4A18030	30.0	8.0

Guard/Shield

Shielding Kit




Part Number	Overall Driveline Length
4209048	48" (1220 mm)
4209060	60" (1524 mm)

Order bearing kit when ordering new guards.

Bearing Kit


Part Number	Type
4209000	2 bearings per kit

Metric Driveline Components

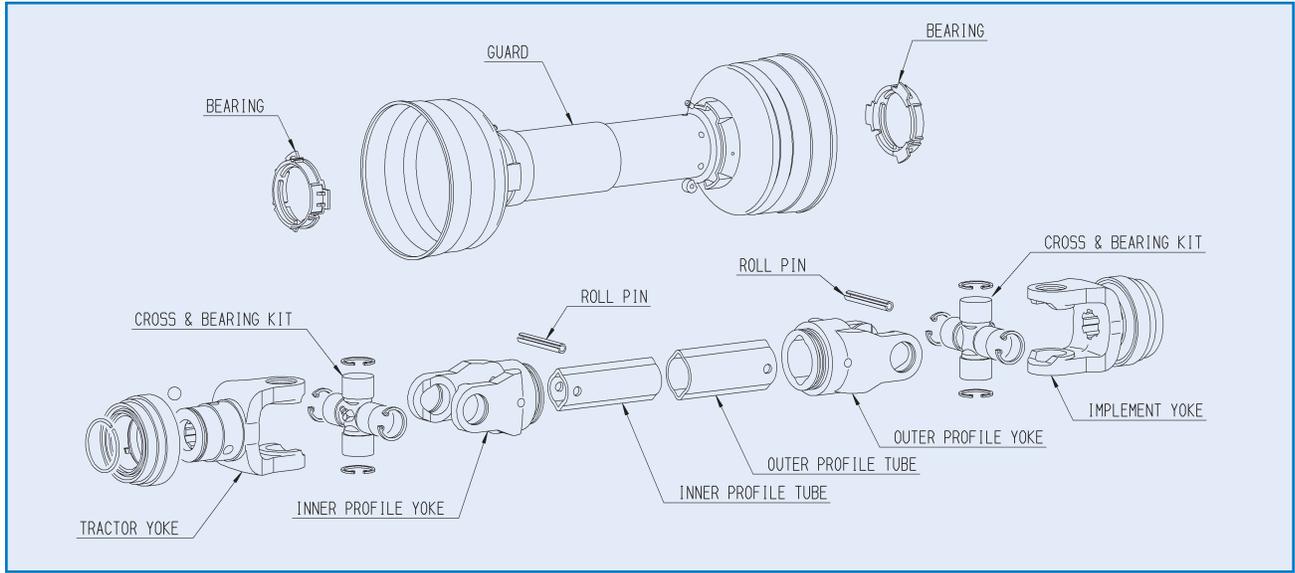


Tractor Yoke

Slide Collar



Part Number	Dim. "A" Bore
4A21306	1 3/8" - 6 Spl.
4A21321	1 3/8" - 21 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4A21006	1 3/8" - 6 Spl.
4A21021	1 3/8" - 21 Spl.

Service Pin Kit


Part Number	Yoke Bore Size
4000110	1 3/8"

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4A22000	23.8	15/16"	61.2	2 13/32"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4A23100	34.5	1 23/64"



Roll Pin



Part Number	Dim. "A"		Dim. "B"	
	mm	in	mm	in
4205065	10.0	25/64"	65	2 9/16"

Inner Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4204110	34.5 (4.0 Wall)	1000	39 3/8"
4204115	34.5 (4.0 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A"	Length	
		mm	in
4206110	41.0 (3.0 Wall)	1000	39 3/8"
4206115	41.0 (3.0 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" mm	Bore in
4A27100	41.2	1 5/8"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" mm	Bore in
4A28225	25.0	—
4A28230	30.0	—
4A28220	—	1 1/4"
4A28222	—	1 3/8"
4A28235	35.0	—

Round Bore

(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore mm	in	Standard Keyway mm	in
4A28025	25.0	—	8.0	—
4A28016	—	1"	—	1/4"
4A28018	—	1 1/8"	—	1/4"
4A28030	30.0	—	8.0	—
4A28020	—	1 1/4"	—	1/4"
4A28022	—	1 3/8"	—	5/16"

Guard/Shield

Shielding Kit




Part Number	Overall Driveline Length	Use With Profile Pair
4209148	48" (1220 mm)	34.5 mm/41.0 mm
4209160	60" (1524 mm)	34.5 mm/41.0 mm

Order bearing kit when ordering new guards.


Bearing Kit

Part Number	Type	Use With Profile Pair
4209101	2 bearings per kit	34.5 mm/41.0 mm

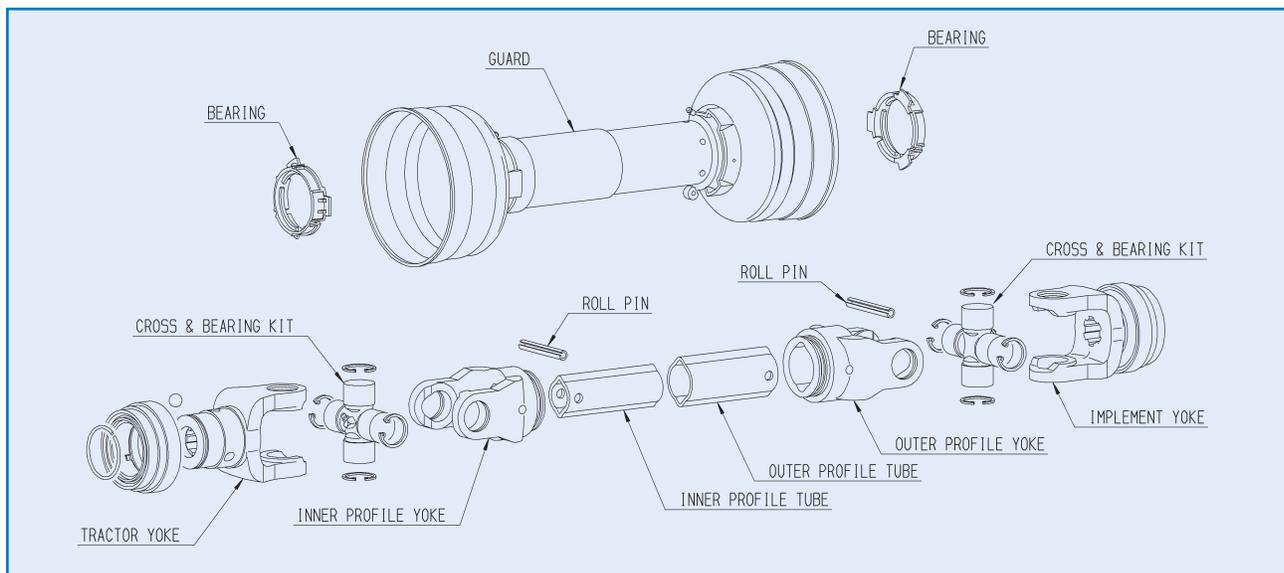


Tractor Yoke

Slide Collar



Part Number	Dim. "A" Bore
4A31306	1 3/8" - 6 Spl.
4A31321	1 3/8" - 21 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4A31006	1 3/8" - 6 Spl.
4A31021	1 3/8" - 21 Spl.

Service Pin Kit

Part Number	Yoke Bore Size
4000110	1 3/8"

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim "B" mm	in
4A32000	27.0	1 1/16"	74.5	2 15/16"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4A33100	34.5	1 23/64"
4A33200	39.5	1 9/16"



Roll Pin



Part Number	Dim. "A"		Dim. "B"	
	mm	in	mm	in
4205065	10.0	25/64"	65.0	2 9/16"

Inner Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4204110	34.5 (4.0 Wall)	1000	39 3/8"
4204210	39.5 (4.5 Wall)	1000	39 3/8"
4204115	34.5 (4.0 Wall)	1500	59 1/16"
4204215	39.5 (4.5 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4206110	41.0 (3.0 Wall)	1000	39 3/8"
4206210	48.0 (4.0 Wall)	1000	39 3/8"
4206115	41.0 (3.0 Wall)	1500	59 1/16"
4206215	48.0 (4.0 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" mm	Bore in
4A37100	41.2	1 5/8"
4A37200	48.0	1 57/64"

Implement Yoke

Shear Pin

(With Pin Hole)



Stock Number	Dim. "A" mm	Bore in
4A38230	30.0	—
4A38220	—	1 1/4"
4A38222	—	1 3/8"
4A38235	35.0	—

Round Bore

(With Keyway & Set Screw Hole)




Part Number	Dim. "A" mm	Bore in	Standard Keyway	
			mm	in
4A38030	30.0	—	8.0	—
4A38020	—	1 1/4"	—	1/4"
4A38022	—	1 3/8"	—	5/16"
4A38035	35.0	—	10.0	—
4A38024	—	1 1/2"	—	3/8"

Metric Driveline Components

Guard/Shield

Shielding Kit

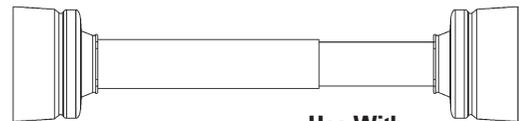


Part Number	Overall Driveline Length	Use With Profile Pair
4209148	48" (1220 mm)	34.5 mm/41.0 mm
4209160	60" (1524 mm)	34.5 mm/41.0 mm
4209248	48" (1220 mm)	39.5 mm/48.0 mm
4209260	60" (1524 mm)	39.5 mm/48.0 mm

Order bearing kit when ordering new guards.


Bearing Kit

Part Number	Type	Use With Profile Pair
4209101	2 bearings per kit	34.5 mm/41.0 mm
4209202	2 bearings per kit	39.5 mm/48.0 mm

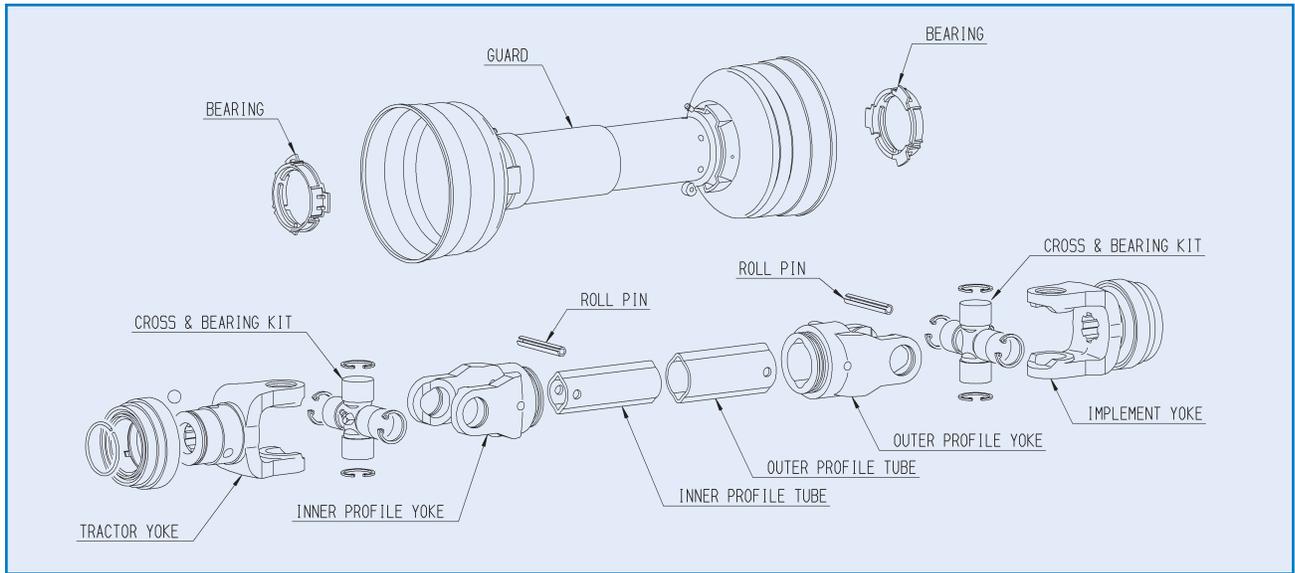


Tractor Yoke

Slide Collar



Part Number	Dim. "A" Bore
4A41306	1 3/8" - 6 Spl.
4A41321	1 3/8" - 21 Spl.
4A41320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4A41006	1 3/8" - 6 Spl.
4A41021	1 3/8" - 21 Spl.
4A41020	1 3/4" - 20 Spl.

Service Pin Kit


Part Number	Yoke Bore Size
4000110	1 3/8"
4000111	1 3/4"

Cross & Bearing Kit



Part Number	Dim. "A" mm	Dim. "A" in	Dim. "B" mm	Dim. "B" in
4A42000	32.0	1 1/4"	76.0	3"


Inner Profile Yoke



Part Number	Type	Dim. "A" mm	Dim. "A" in	Dim. "B" mm	Dim. "B" in
4A43200	Lemon	39.5	1 9/16"		
4A43300	Star			51.0	2"




Roll Pin




Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4205080	10.0	25/64"	80.0	3 5/32"

Inner Profile Tube




Part Number	Dim. "A" mm	Dim. "B" mm	Length mm	in
4204210	39.5 (4.5 Wall)		1000	39 3/8"
4204310		51.0	1000	39 3/8"
4204215	39.5 (4.5 Wall)		1500	59 1/16"
4204315		51.0	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Dim. "B" mm	Length mm	in
4206210	48.0 (4.0 Wall)		1000	39 3/8"
4206310		61.0 (4.5 Wall)	1000	39 3/8"
4206215	48.0 (4.0 Wall)		1500	59 1/16"
4206315		61.0 (4.5 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Type	Dim. "A" mm	in	Dim. "B" mm	in
4A47200	Lemon	48.0	1 57/64"		
4A47300	Star			61.0	2 13/32"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" mm	Bore in
4A48222	—	1 3/8"
4A48235	35.0	—
4A48244	40.0	—


Round Bore

(With Keyway & Set Screw Hole)



Part Number	Dim. "A" mm	Bore in	Standard Keyway mm	in
4A48020	—	1 1/4"	—	1/4"
4A48022	—	1 3/8"	—	5/16"
4A48035	35.0	—	10.0	—
4A48024	—	1 1/2"	—	3/8"
4A48044	40.0	—	12.0	—
4A48028	—	1 3/4"	—	3/8"


Clamp Yoke



Part Number	Dim. "A" Bore
4A48506	1 3/8" - 6 Spl.
4A48521	1 3/8" - 21 Spl.
4A48540	1 3/4" - 20 Spl.

Guard/Shield

Shielding Kit




Part Number	Overall Driveline Length
4209248	48" (1220 mm)
4209260	60" (1524 mm)

Order bearing kit when ordering new guards.

Bearing Kit


Part Number	Type
4209202	2 bearings per kit

Metric Driveline Components

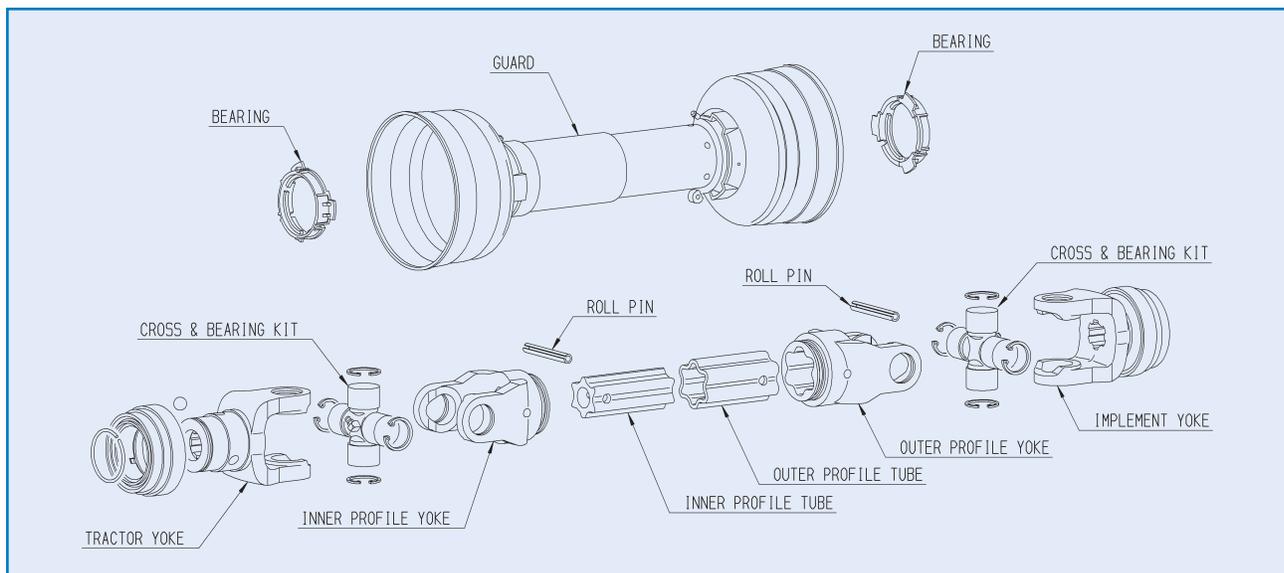


Tractor Yoke

Slide Collar



Part Number	Dim. "A" Bore
4A51306	1 3/8" - 6 Spl.
4A51321	1 3/8" - 21 Spl.
4A51320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4A51006	1 3/8" - 6 Spl.
4A51021	1 3/8" - 21 Spl.
4A51020	1 3/4" - 20 Spl.

Service Pin Kit


Part Number	Yoke Bore Size
4000110	1 3/8"
4000111	1 3/4"

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4A52000	36.0	1 27/64"	89.0	3 1/2"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4A53300	51.0	2"



Roll Pin




Part Number	Dim. "A"		Dim "B"	
	mm	in	mm	in
4205090	10.0	25/64"	90.0	3 35/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4204310	51.0	1000	39 3/8"
4204315	51.0	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4206310	61.0 (4.5 Wall)	1000	39 3/8"
4206315	61.0 (4.5 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" Bore	
	mm	in
4A57300	61.0	2 13/32"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" Bore in
4A58222	1 3/8"
4A58224	1 1/2"


Round Bore

(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore		Standard Keyway	
	mm	in	mm	in
4A58022	—	1 3/8"	—	3/8"
4A58035	35.0	—	10.0	—
4A58024	—	1 1/2"	—	3/8"
4A58028	—	1 3/4"	—	3/8"


Clamp Yoke



Part Number	Dim. "A" Bore
4A58506	1 3/8" - 6 Spl.
4A58521	1 3/8" - 21 Spl.
4A58547	1 3/4" - 6 Spl.
4A58540	1 3/4" - 20 Spl.

Spline Bore


(With Pin Hole)



Part Number	Dim. "A" Bore
4A58121	1 3/8" - 21 Spl.

Guard/Shield

Shielding Kit

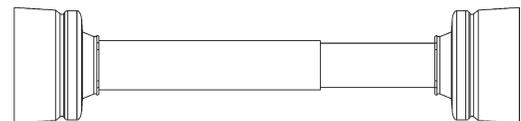


Part Number	Overall Driveline Length
4209448	48" (1220 mm)
4209460	60" (1524 mm)

Order bearing kit when ordering new guards.


Bearing Kit

Part Number	Type
4209202	2 bearings per kit

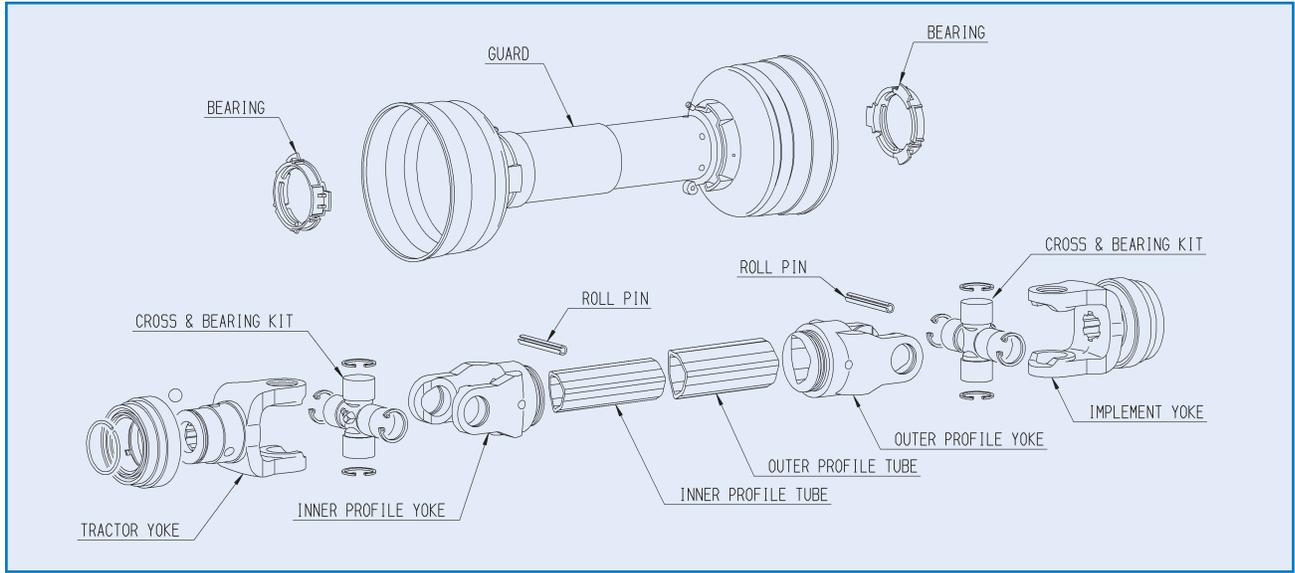


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B11306	1 3/8" - 6 Spl.
4B11321	1 3/8" - 21 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B11018	1 1/8" - 6 Spl.
4B11006	1 3/8" - 6 Spl.
4B11021	1 3/8" - 21 Spl.

Cross & Bearing Kit




Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B12054	22.0	7/8"	54.0	2 1/8"

Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B13026	27.5	1 5/64"

Roll Pin




Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05840	Inner	8.0	5/16"	40.0	1 37/64"
4B05845	Outer	8.0	5/16"	45.0	1 49/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B04026	26.5 (3.4 Wall)	1000	39 3/8"
4B04526	26.5 (3.4 Wall)	1500	59 1/16"

Outer Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B06033	32.5 (2.6 Wall)	1000	39 3/8"
4B06533	32.5 (2.6 Wall)	1500	59 1/16"

Outer Profile Yoke



Part Number	Dim. "A" mm	Bore in
4B17033	33.0	1 5/16"

Implement Yoke




Shear Pin *(With Pin Hole)*

Part Number	Dim. "A" Bore in
4B18220	1 1/4"




Round Bore *(With Keyway & Set Screw Hole)*

Part Number	Dim. "A" mm	Bore in	Standard Keyway	
			mm	in
4B18016	—	1"	—	1/4"
4B18030	30.0	—	8.0	—
4B18020	—	1 1/4"	—	1/4"

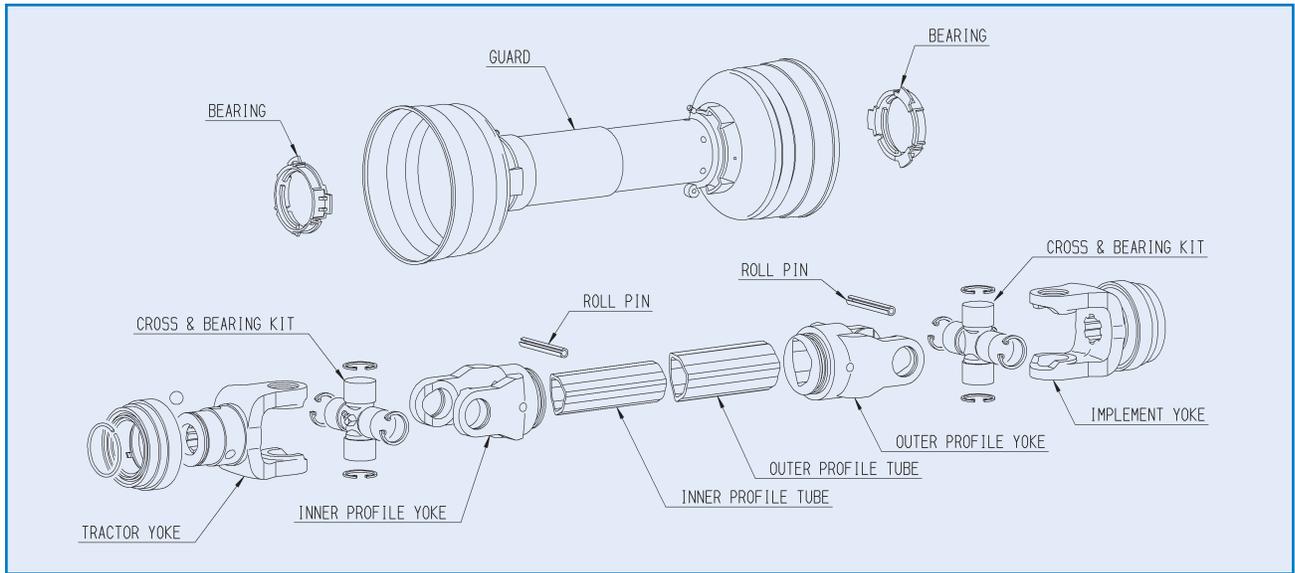


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B21306	1 3/8" - 6 Spl.
4B21321	1 3/8" - 21 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B21018	1 1/8" - 6 Spl.
4B21006	1 3/8" - 6 Spl.
4B21021	1 3/8" - 21 Spl.

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim "B" mm	in
4B22061	23.8	15/16"	61.2	2 13/32"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B23029	29.8	1 11/64"




Roll Pin



Part Number	Type	Dim. "A" mm	in	Dim. "B" mm	in
4B05845	Inner	8.0	5/16"	45.0	1 49/64"
4B05855	Outer	8.0	5/16"	55.0	2 11/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length mm	in
4B04029	29.0 (4.1 Wall)	1000	39 3/8"
4B04529	29.0 (4.1 Wall)	1500	59 1/16"

Outer Profile Tube




Part Number	Dim. "A" mm	Length mm	in
4B06036	36.0 (3.2 Wall)	1000	39 3/8"
4B06536	36.0 (3.2 Wall)	1500	59 1/16"

Outer Profile Yoke



Part Number	Dim. "A" mm	Bore in
4B27036	36.8	1 29/64"

Implement Yoke



Shear Pin

(With Pin Hole)


Part Number	Dim. "A" Bore in
4B28220	1 1/4"
4B28222	1 3/8"



Round Bore


(With Keyway & Set Screw Hole)

Part Number	Dim. "A" Bore mm	in	Standard Keyway mm	in
4B28025	25.0	—	8.0	—
4B28016	—	1"	—	1/4"
4B28018	—	1 1/8"	—	5/16"
4B28030	30.0	—	8.0	—
4B28020	—	1 1/4"	—	1/4"
4B28022	—	1 3/8"	—	5/16"

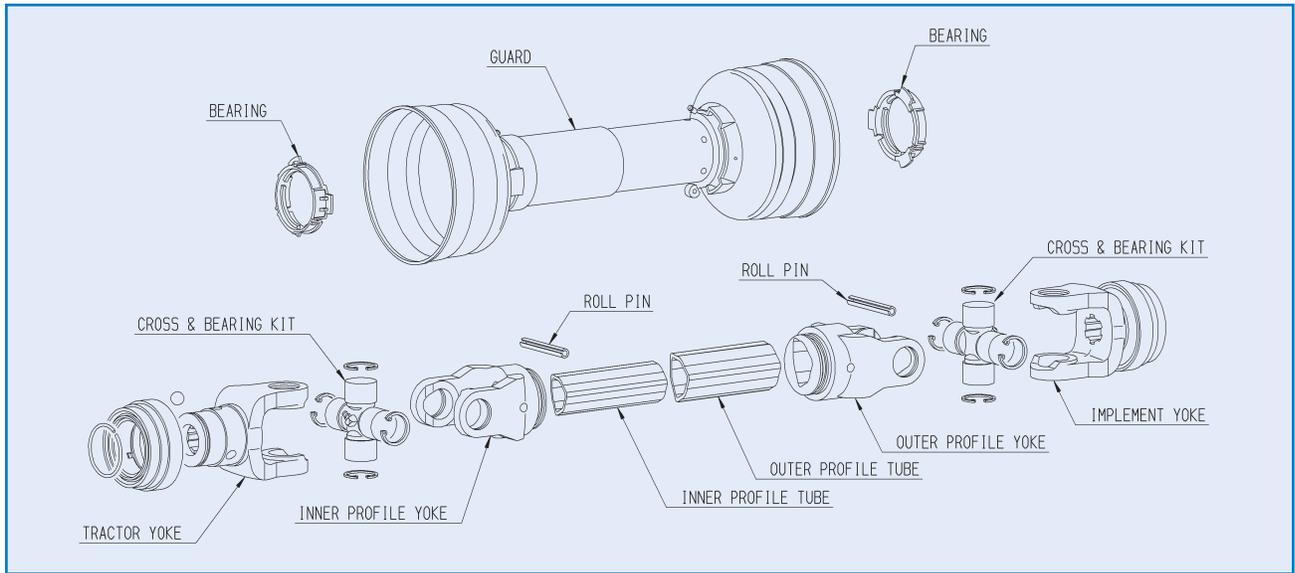


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B31306	1 3/8" - 6 Spl.
4B31321	1 3/8" - 21 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B31006	1 3/8" - 6 Spl.
4B31021	1 3/8" - 21 Spl.

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B32070	27.0	1 1/16"	70.0	2 3/4"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B33036	36.8	1 29/64"




Roll Pin



Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05855	Inner	8.0	5/16"	55.0	2 11/64"
4B05860	Outer	8.0	5/16"	60.0	2 23/64"

Outer Profile Yoke




Part Number	Dim. "A" mm	Bore in
4B37043	44.0	1 47/64"

Inner Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06036	36.0 (3.2 Wall)	1000	39 3/8"
4B06536	36.0 (3.2 Wall)	1500	59 1/16"

Implement Yoke



Shear Pin

(With Pin Hole)

Part Number	Dim. "A" mm	Bore in
4B38225	25.0	—
4B38230	30.0	—
4B38220	—	1 1/4"

Outer Profile Tube



Part Number	Dim. "A"	Length	
		mm	in
4B06043	43.5 (3.4 Wall)	1000	39 3/8"
4B06543	43.5 (3.4 Wall)	1500	59 1/16"


Round Bore

(With Keyway & Set Screw Hole)




Part Number	Dim. "A" mm	Bore in	Standard Keyway	
			mm	in
4B38025	25.0	—	8.0	—
4B38030	30.0	—	8.0	—
4B38020	—	1 1/4"	—	1/4"
4B38022	—	1 3/8"	—	5/16"

Metric Driveline Components

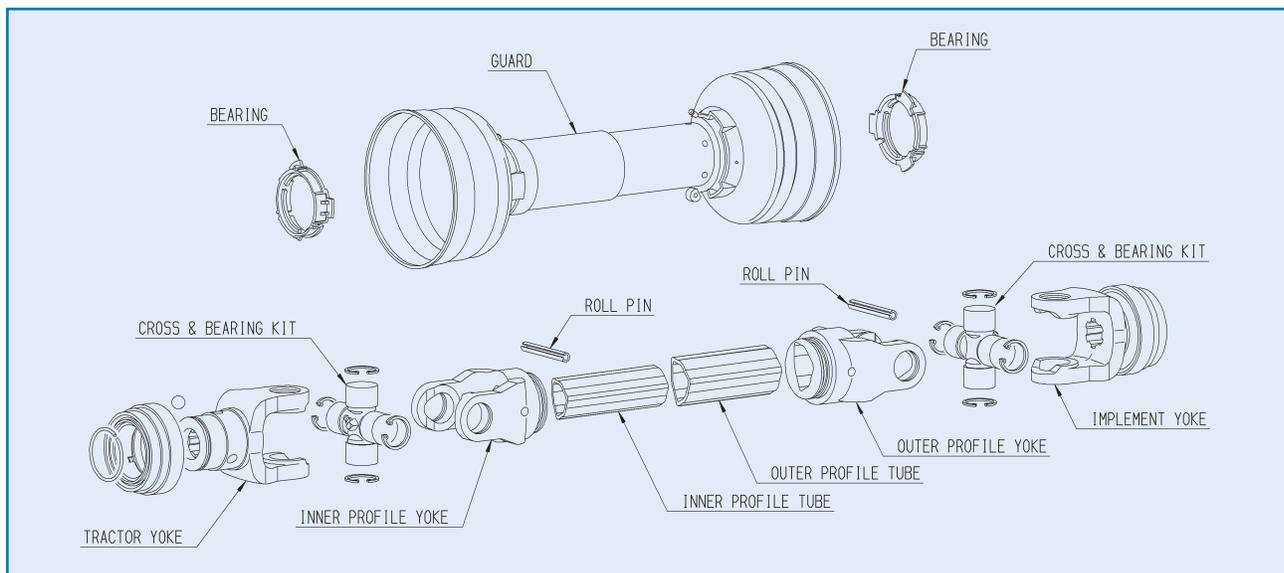


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B41306	1 3/8" - 6 Spl.
4B41321	1 3/8" - 21 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B41019	1 1/8" Hex
4B41006	1 3/8" - 6 Spl.
4B41021	1 3/8" - 21 Spl.

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B42074	27.0	1 1/16"	74.5	2 15/16"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B43036	36.8	1 29/64"



Roll Pin



Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05855	Inner	8.0	5/16"	55.0	2 11/64"
4B05860	Outer	8.0	5/16"	60.0	2 23/64"

Inner Profile Tube




Part Number	Dim. "A"	Length	
		mm	in
4B04037	36.0 (3.9 Wall)	1000	39 3/8"
4B04537	36.0 (3.9 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06043	43.5 (3.4 Wall)	1000	39 3/8"
4B06543	43.5 (3.4 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" mm	Dim. "A" Bore in
4B47044	44.0	1 47/64"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" mm	Bore in
4B48230	30.0	—
4B48220	—	1 1/4"
4B48235	35.0	—

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" mm	Bore in	Standard Keyway mm	in
4B48030	30.0	—	8.0	—
4B48020	—	1 1/4"	—	1/4"
4B48022	—	1 3/8"	—	5/16"
4B48035	35.0	—	10.0	—
4B48024	—	1 1/2"	—	3/8"


Hex Bore

(With Pin Hole)




Part Number	Dim. "A" mm	Bore in
4B48849	28.9	1 9/64"

Clamp Yoke




Part Number	Dim. "A" Bore
4B48506	1 3/8" - 6 Spl.

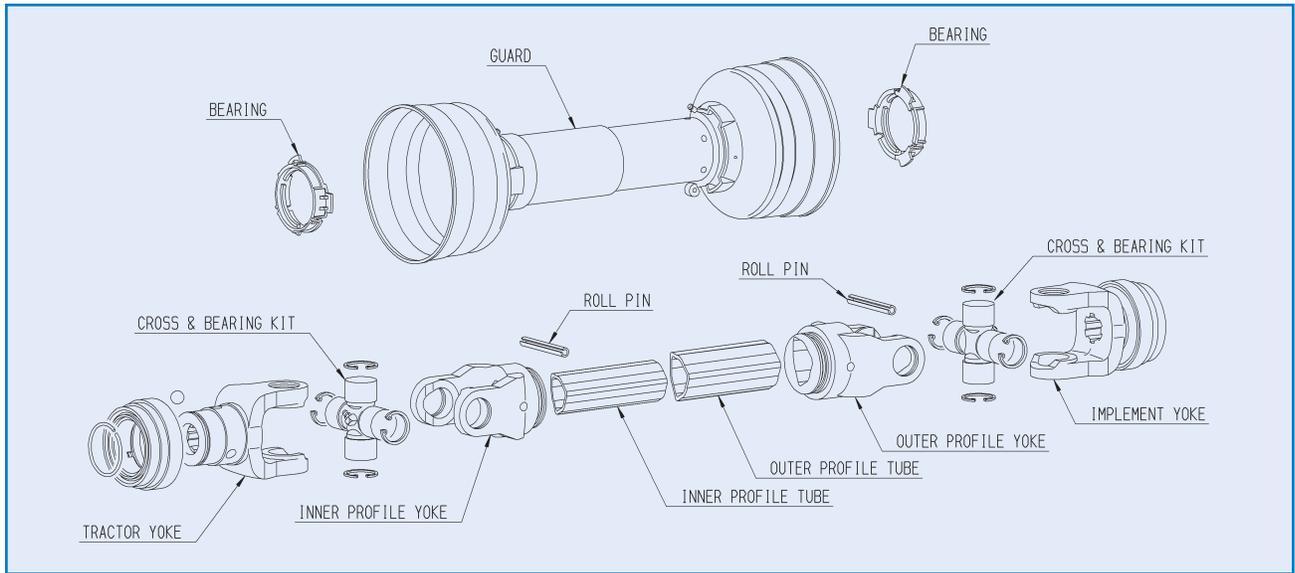


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B51306	1 3/8" - 6 Spl.
4B51321	1 3/8" - 21 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B51006	1 3/8" - 6 Spl.
4B51021	1 3/8" - 21 Spl.
4B51020	1 3/4" - 20 Spl.

Cross & Bearing Kit




Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B52079	30.2	1 3/16"	79.4	3 1/8"

Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B53045	45.2	1 25/32"

Roll Pin



Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05060	Inner	10.0	25/64"	60.0	2 23/64"
4B05070	Outer	10.0	25/64"	70.0	2 3/4"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B04045	45.0 (3.9 Wall)	1000	39 3/8"
4B04545	45.0 (3.9 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06052	51.5 (3.0 Wall)	1000	39 3/8"
4B06552	51.5 (3.0 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" mm	Dim. "A" Bore in
4B57052	51.7	2 3/64"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" Bore in
4B58222	1 3/8"


Round Bore

(With Keyway & Set Screw Hole)




Part Number	Dim. "A" Bore mm	Bore in	Standard Keyway	
			mm	in
4B58020	—	1 1/4"	—	1/4"
4B58022	—	1 3/8"	—	5/16"
4B58035	35.0	—	10.0	—
4B58024	—	1 1/2"	—	3/8"

Clamp Yoke




Part Number	Dim. "A" Bore
4B58521	1 3/8" - 21 Spl.

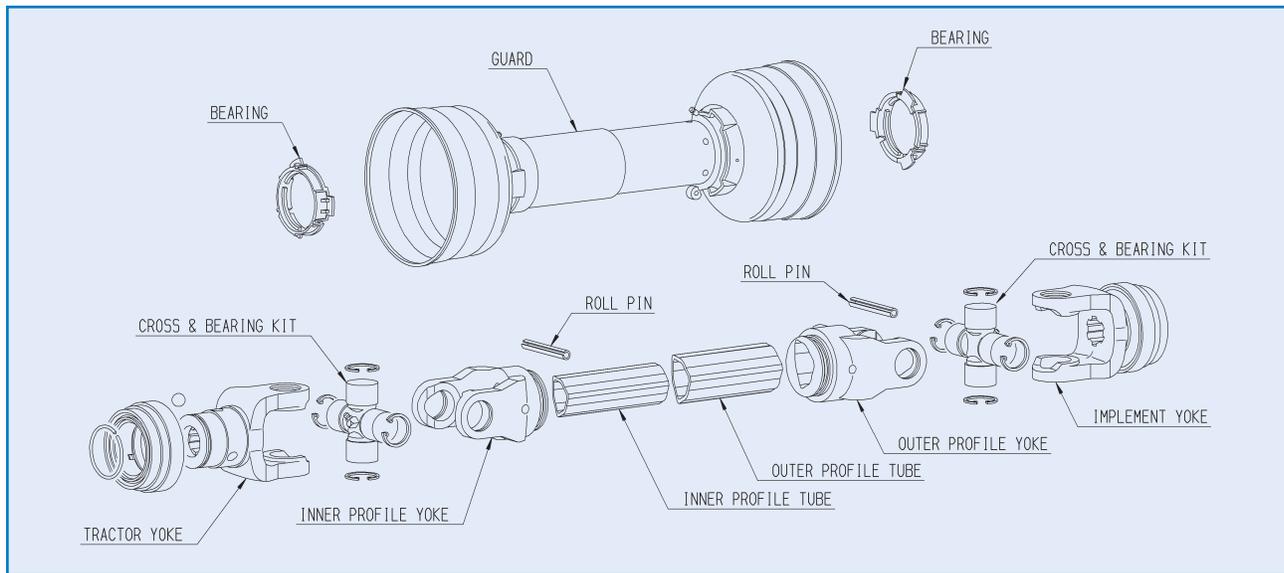


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B61306	1 3/8" - 6 Spl.
4B61321	1 3/8" - 21 Spl.
4B61320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4B61019	1 1/8" Hex
4B61006	1 3/8" - 6 Spl.
4B61021	1 3/8" - 21 Spl.
4B61020	1 3/4" - 20 Spl.

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B62092	30.2	1 3/16"	92.0	3 5/8"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B63045	45.2	1 25/32"



Roll Pin



Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05065	Inner	10.0	25/64"	65.0	2 9/16"
4B05075	Outer	10.0	25/64"	75.0	2 61/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B04045	45.0 (3.9 Wall)	1000	39 3/8"
4B04545	45.0 (3.9 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06054	54.0 (4.5 Wall)	1000	39 3/8"
4B06554	54.0 (4.5 Wall)	1500	59 1/16"

Outer Profile Yoke




Part Number	Dim. "A" mm	Dim. "A" Bore in
4B67054	54.2	2 1/8"

Implement Yoke

Shear Pin

(With Pin Hole)



Part Number	Dim. "A" Bore in
4B68220	1 1/4"
4B68222	1 3/8"

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore mm	Standard Keyway	
		mm	in
4B68020	—	1 1/4"	1/4"
4B68022	—	1 3/8"	5/16"
4B68035	35.0	—	10.0
4B68024	—	1 1/2"	3/8"
4B68044	40.0	—	12.0
4B68028	—	1 3/4"	3/8"


Hex Bore

(With Pin Hole)




Part Number	Dim. "A" Bore mm	Dim. "A" Bore in
4B68849	28.9	1 9/64"

Clamp Yoke




Part Number	Dim. "A" Bore
4B68506	1 3/8" - 6 Spl.
4B68521	1 3/8" - 21 Spl.
4B68540	1 3/4" - 20 Spl.

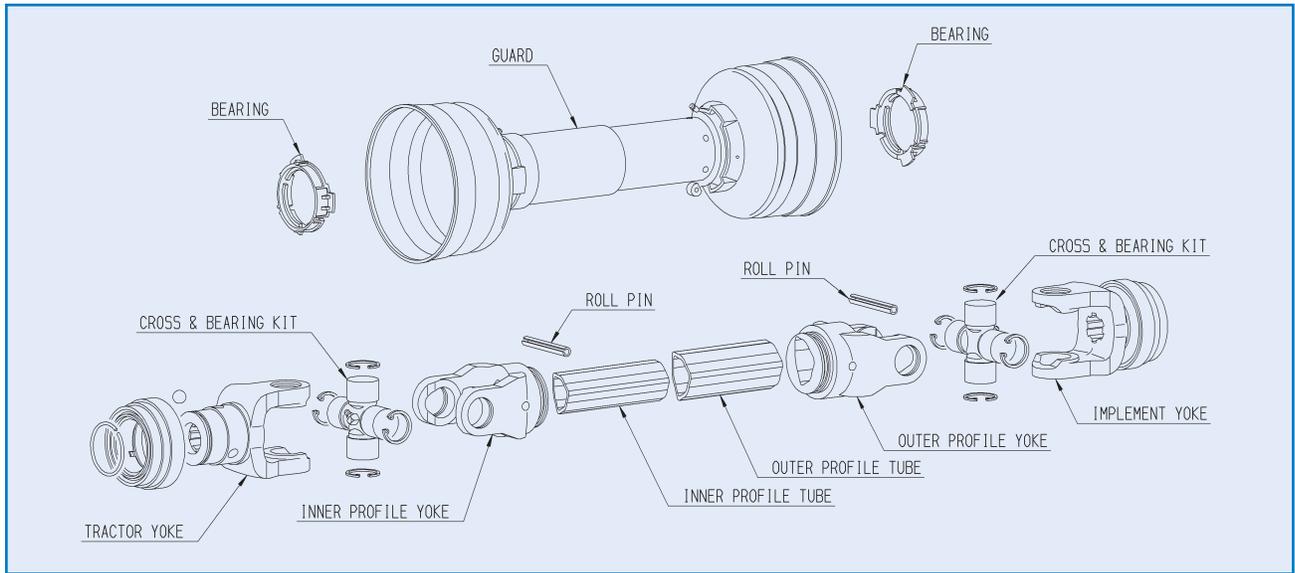


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B71306	1 3/8" - 6 Spl.
4B71321	1 3/8" - 21 Spl.
4B71320	1 3/4" - 20 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B71006	1 3/8" - 6 Spl.
4B71021	1 3/8" - 21 Spl.
4B71036	1 3/4" - 6 Spl.
4B71020	1 3/4" - 20 Spl.

Cross & Bearing Kit




Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B72094	34.9	1 3/8"	94.0	3 45/64"

Inner Profile Yoke




Part Number	Dim. "A" Bore mm	in
4B73045	45.2	1 25/32"

Roll Pin




Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05065	Inner	10.0	25/64"	65.0	2 9/16"
4B05075	Outer	10.0	25/64"	75.0	2 61/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B04046	45.0 (5.4 Wall)	1000	39 3/8"
4B04546	45.0 (5.4 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06054	54.0 (4.5 Wall)	1000	39 3/8"
4B06554	54.0 (4.5 Wall)	1500	59 1/16"

Outer Profile Yoke



Part Number	Dim. "A" Bore	
	mm	in
4B77054	54.2	2 1/8"


Implement Yoke



Round Bore


(With Keyway & Set Screw Hole)

Part Number	Dim. "A" Bore		Standard Keyway	
	mm	in	mm	in
4B78035	35.0	—	10.0	—
4B78044	40.0	—	12.0	—
4B78028	—	1 3/4"	—	3/8"

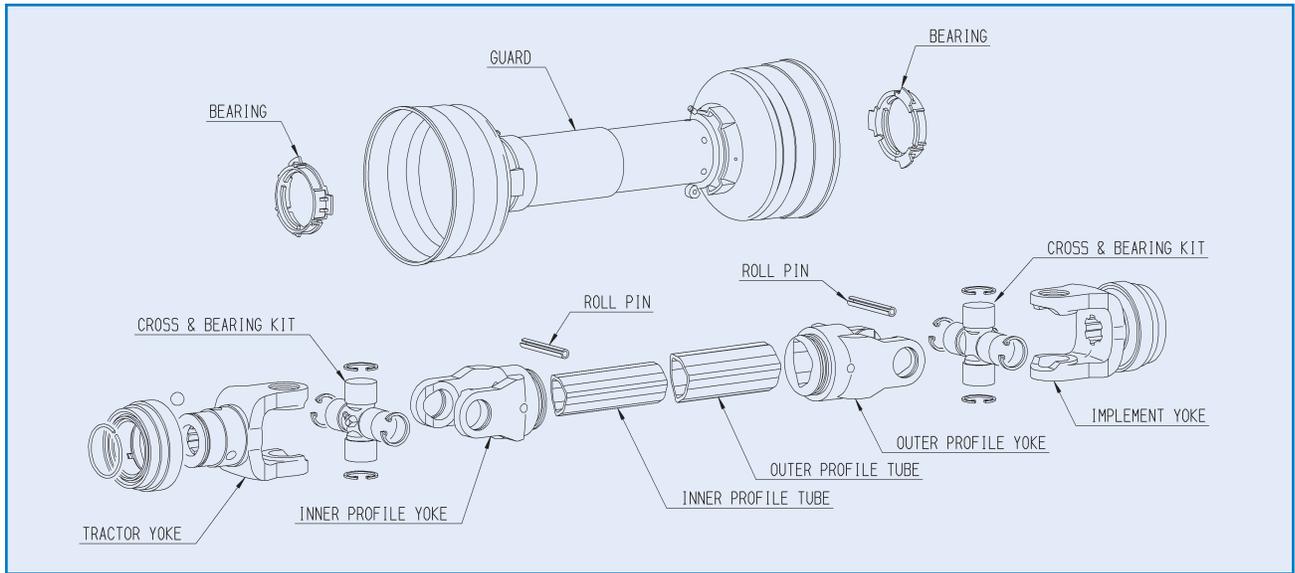


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4B81306	1 3/8" - 6 Spl.
4B81321	1 3/8" - 21 Spl.
4B81320	1 3/4" - 20 Spl.

Quick Disconnect



Part Number	Dim. "A" Bore
4B81006	1 3/8" - 6 Spl.
4B81021	1 3/8" - 21 Spl.
4B81036	1 3/4" - 6 Spl.
4B81020	1 3/4" - 20 Spl.

Cross & Bearing Kit



Part Number	Dim. "A" mm	in	Dim. "B" mm	in
4B82006	34.9	1 3/8"	106.4	4 3/16"


Inner Profile Yoke



Part Number	Dim. "A" Bore mm	in
4B83054	54.2	2 1/8"



Roll Pin




Part Number	Type	Dim. "A"		Dim. "B"	
		mm	in	mm	in
4B05275	Inner	12.0	15/32"	75.0	2 61/64"
4B05290	Outer	12.0	15/32"	90.0	3 35/64"

Inner Profile Tube




Part Number	Dim. "A" mm	Length	
		mm	in
4B06054	54.0 (4.5 Wall)	1000	39 3/8"
4B06554	54.0 (4.5 Wall)	1500	59 1/16"

Outer Profile Tube



Part Number	Dim. "A" mm	Length	
		mm	in
4B06063	63.0 (4.1 Wall)	1000	39 3/8"
4B06563	63.0 (4.1 Wall)	1500	59 1/16"

Outer Profile Yoke



Part Number	Dim. "A" Bore	
	mm	in
4B87063	63.0	2 31/64"

Implement Yoke




Round Bore

(With Keyway & Set Screw Hole)

Part Number	Dim. "A" Bore		Standard Keyway	
	mm	in	mm	in
4B88035	35.0	—	10.0	—
4B88024	—	1 1/2"	—	3/8"
4B88028	—	1 3/4"	—	3/8"
4B88032	—	2"	—	1/2"


Clamp Yoke




Part Number	Dim. "A" Bore
4B88506	1 3/8" - 6 Spl.
4B88521	1 3/8" - 21 Spl.
4B88540	1 3/4" - 20 Spl.

Spline Bore

(With Pin Hole)




Part Number	Dim. "A" Bore
4B88106	1 3/8" - 6 Spl.

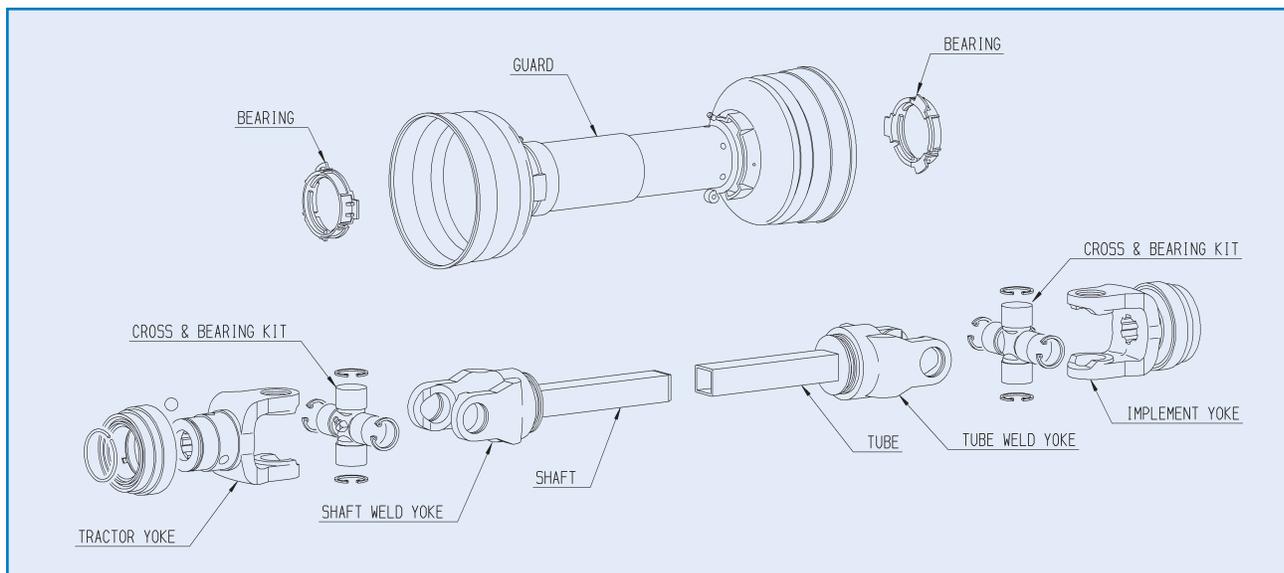


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4061306	1 3/8" - 6 Spl.
4061321	1 3/8" - 21 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4061006	1 3/8" - 6 Spl.
4061021	1 3/8" - 21 Spl.

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"
4062000	31/32"	2 5/16"

Shaft Weld Yoke



Part Number	Dim. "A" Bore	Dim. "B" Bore
4063100		1" x 15 Spl.
4063000	3/4" x 7/8" Rect.	



6 Series Interchanges with Weasler (continued)

Shaft

Rectangular



Part Number	Size	Length
4014603	3/4" x 7/8" Rect.	3'
4014606	3/4" x 7/8" Rect.	6'
4014610	3/4" x 7/8" Rect.	10'


Spline

(Induction Hardened)



Part Number	Dim. "A" Size	Length
4024003	1" - 15 Spl.	3'

Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim. "B" Bore	Fits OD Tube Size
4065004	4"	3/4" x 7/8" Rect.		1 1/2" (.065" Wall)
4065103	3"		1" - 15 Spl.	1 1/2" (.065" Wall)

Tube

Rectangular




Part Number	Size	Length	Fits Shaft
4016403	1" x 1 1/8" Rect.	3'	3/4" x 7/8"
4016406	1" x 1 1/8" Rect.	6'	3/4" x 7/8"
4016410	1" x 1 1/8" Rect.	10'	3/4" x 7/8"

Round



Part Number	Dim. "A" Size	Length
4026003	1 1/2" (.065" Wall)	3'
4026006	1 1/2" (.065" Wall)	6'

Tube Weld Yoke




Part Number	Dim. "A" Bore	Fits OD Tube Size
4067000	1" x 1 1/8"	
4067300		1 1/2" (.065" Wall)

Standard Driveline Components

Implement Yoke

Shear Pin


(With Pin Hole)



Part Number	Dim. "A" Bore
4068216	1"
4068218	1 1/8"
4068220	1 1/4"

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Standard Keyway
4068010	5/8"	3/16"
4068012	3/4"	3/16"
4068013	13/16"	3/16"
4068014	7/8"	3/16"
4068015	15/16"	1/4"
4068016	1"	1/4"
4068018	1 1/8"	1/4"
4068019	1 3/16"	1/4"
4068020	1 1/4"	1/4"


Round Bore

(With Double Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Double Keyway
4068412	3/4"	3/16" & 1/4"
4068413	13/16"	3/16" & 1/4"
4068414	7/8"	3/16" & 1/4"
4068416	1"	3/16" & 1/4"
4068418	1 1/8"	1/4" & 5/16"
4068419	1 3/16"	1/4" & 5/16"
4068420	1 1/4"	1/4" & 5/16"


Clamp Yoke



Part Number	Dim. "A" Bore	Keyway	Dim "B" Bore
4068514	7/8"	3/16"	
4068516	1"	1/4"	
4068545			1" - 15 Spl.

Spline Bore


(With Pin Hole)



Part Number	Dim. "A" Bore
4068141	1 1/8" - 6 Spl.
4068106	1 3/8" - 6 Spl.


Square Bore

(With Set Screw Hole)




Part Number	Dim. "A" Bore
4068312	3/4"
4068314	7/8"
4068316	1"
4068318	1 1/8"
4068320	1 1/4"

Stock Bore




Part Number	Dim "A" Bore
4068608	1/2"

Yoke & Shaft Assembly

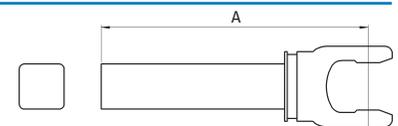


Part Number	Shaft Size	Dim. "A"
4063021	3/4" x 7/8" Rect.	38.75"
4063120	1" - 15 Spl.	12.50"

Yoke & Tube Assembly

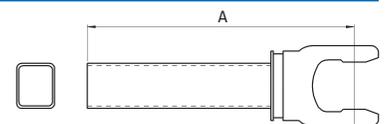


Part Number	Tube Size	Fits Shaft	Dim. "A"
4067010	1" x 1 1/8" Rect.	3/4" x 7/8" Rect.	38.75"

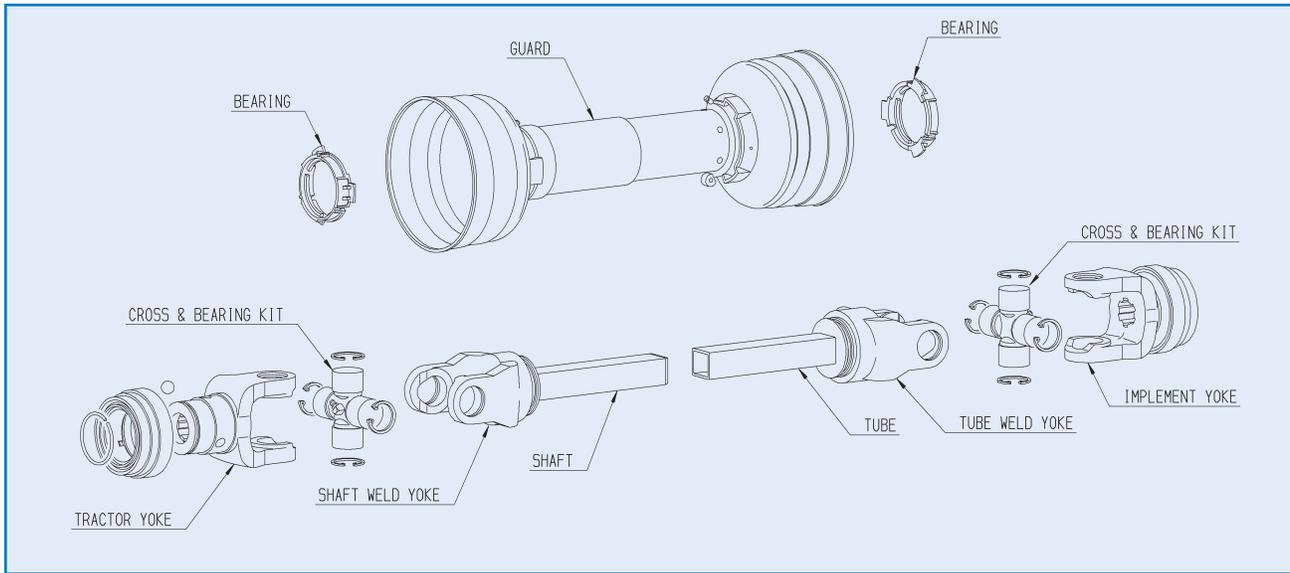


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4121306	1 3/8" - 6 Spl.
4121321	1 3/8" - 21 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4121006	1 3/8" - 6 Spl.
4121021	1 3/8" - 21 Spl.

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"
4122000	1 1/16"	2 1/2"

Shaft Weld Yoke



Part Number	Dim. "A" Bore
4123700	15/16" Sq.
4123200	1" x 1 1/8" Rect.

Standard Driveline Components


Shaft

Rectangular



Part Number	Size	Length
4014703	1" x 1 1/8" Rect.	3'
4014706	1" x 1 1/8" Rect.	6'
4014710	1" x 1 1/8" Rect.	10'

Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim. "B" Bore	Fits OD Tube Size
4125205	5"	1" x 1 1/8" Rect.		2" (.083 Wall)
4125508	8"		1 5/16" - 20 Spl.	2" (.083 Wall)

Tube

Rectangular




Part Number	Size	Length	Fits Shaft
4016503	1 1/4" x 1 3/8" Rect.	3'	1" x 1 1/8"
4016506	1 1/4" x 1 3/8" Rect.	6'	1" x 1 1/8"
4016510	1 1/4" x 1 3/8" Rect.	10'	1" x 1 1/8"

Round




Part Number	Dim. "A" Size	Length
4026103	2" (.083" Wall)	3'
4026106	2" (.083" Wall)	6'
4026110	2" (.083" Wall)	10'

Tube Weld Yoke



Part Number	Dim. "A" Bore	Fits OD Tube Size
4127200	1 1/4" Sq.	
4127100	1 1/4" x 1 3/8" Rect.	
4127500		2" (.083" Wall)

Implement Yoke




Shear Pin

(With Pin Hole)

Part Number	Dim. "A" Bore
4128216	1"
4128218	1 1/8"
4128220	1 1/4"
4128222	1 3/8"

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Standard Keyway
4128012	3/4"	3/16"
4128014	7/8"	3/16"
4128015	15/16"	1/4"
4128016	1"	1/4"
4128018	1 1/8"	1/4"
4128019	1 3/16"	1/4"
4128020	1 1/4"	1/4"
4128022	1 3/8"	5/16"
4128024	1 1/2"	3/8"

Round Bore

(With Double Keyway & Set Screw Hole)




Part Number	Dim. "A" Bore	Double Keyway
4128416	1"	1/4" & 3/16"
4128418	1 1/8"	1/4" & 5/16"
4128420	1 1/4"	1/4" & 5/16"



Implement Yoke (continued)

Hexagon Bore


(With Set Screw Hole)



Part Number	Dim. "A" Bore
4128818	1 1/8"

Spline Bore


(With Pin Hole)



Part Number	Dim. "A" Bore
4128141	1 1/8" - 6 Spl.
4128106	1 3/8" - 6 Spl.
4128121	1 3/8" - 21 Spl.


Square Bore

(With Set Screw Hole)




Part Number	Dim. "A" Bore
4128314	7/8"
4128316	1"
4128318	1 1/8"
4128320	1 1/4"

Stock Bore




Part Number	Dim. "A" Bore
4128608	1/2"

Yoke & Shaft Assembly




Part Number	Shaft Size	Dim. "A"
4123220	1" x 1 1/8" Rect.	37.38"
4123221	1" x 1 1/8" Rect.	49.38"

Yoke & Tube Assembly

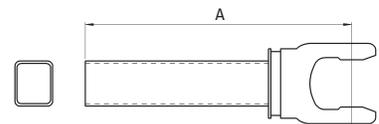


Part Number	Tube Size	Fits Shaft	Dim. "A"
4127110	1 1/4" x 1 3/8" Rect.	1" x 1 1/8" Rect.	37.38"
4127111	1 1/4" x 1 3/8" Rect.	1" x 1 1/8" Rect.	49.38"

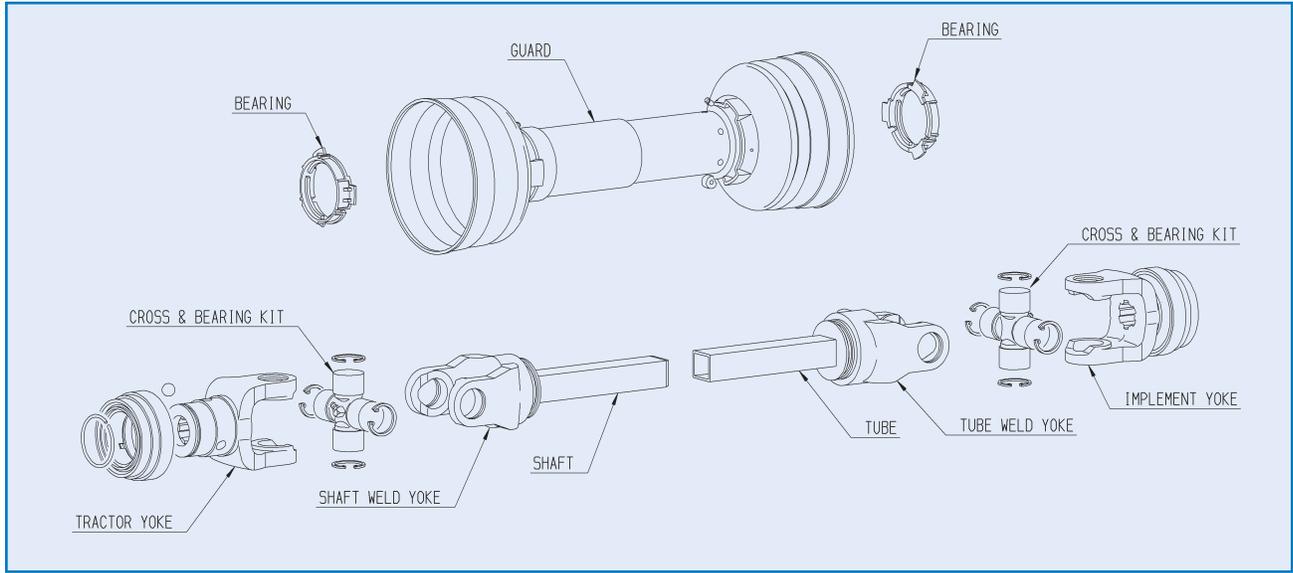


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4141306	1 3/8" - 6 Spl.
4141321	1 3/8" - 21 Spl.
4141320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore	Dim. "B" Bore
4141019		1 1/8" Hex
4141006	1 3/8" - 6 Spl.	
4141021	1 3/8" - 21 Spl.	

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"
4142000	1 1/8"	2 5/8"

Shaft Weld Yoke



Part Number	Dim. "A" Bore	Dim. "B" Bore
4143200	1" x 1 1/8" Rect.	
4143500		1 5/16" - 20 Spl.



14 Series Interchanges with Weasler (continued)

Shaft

Rectangular



Part Number	Size	Length
4014703	1" x 1 1/8" Rect.	3'
4014706	1" x 1 1/8" Rect.	6'
4014710	1" x 1 1/8" Rect.	10'


Spline

(Induction Hardened)



Part Number	Dim. "A" Size	Length
4024103	1 5/16" - 20 Spl.	3'

Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim. "B" Bore	Fits OD Tube Size
4125205	5"	1" x 1 1/8" Rect.		2"(.083" Wall)
4125508	8"		1 5/16" - 20 Spl.	2"(.083" Wall)

Tube

Rectangular




Part Number	Size	Length	Fits Shaft
4016503	1 1/4" x 1 3/8" Rect.	3'	1" x 1 1/8"
4016506	1 1/4" x 1 3/8" Rect.	6'	1" x 1 1/8"
4016510	1 1/4" x 1 3/8" Rect.	10'	1" x 1 1/8"

Round



Part Number	Dim. "A" Size	Length
4026103	2"(.083" Wall)	3'
4026106	2"(.083" Wall)	6'
4026110	2"(.083" Wall)	10'

Tube Weld Yoke




Part Number	Dim. "A" Bore	Fits OD Tube Size
4147100	1 1/4" x 1 3/8"	
4147500		2"(.083" Wall)

Standard Driveline Components

Implement Yoke

Shear Pin


(With Pin Hole)



Part Number	Dim. "A" Bore
4148218	1 1/8"
4148220	1 1/4"
4148222	1 3/8"
4148224	1 1/2"

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Standard Keyway
4148016	1"	1/4"
4148018	1 1/8"	1/4"
4148019	1 3/16"	1/4"
4148020	1 1/4"	1/4"
4148022	1 3/8"	5/16"
4148023	1 7/16"	3/8"
4148024	1 1/2"	3/8"

Round Bore


(With Double Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Double Keyway
4148418	1 1/8"	1/4" & 5/16"
4148419	1 3/16"	1/4" & 5/16"
4148420	1 1/4"	1/4" & 5/16"

Hexagon Bore


(With Set Screw Hole)



Part Number	Dim. "A" Bore
4148818	1 1/8"
4148820	1 1/4"

Spline Bore


(With Pin Hole)



Part Number	Dim. "A" Bore
4148141	1 1/8" - 6 Spl.
4148146	1 1/4" - 6 Spl.
4148106	1 3/8" - 6 Spl.
4148121	1 3/8" - 21 Spl.


Square Bore

(With Set Screw Hole)




Part Number	Dim. "A" Bore
4148314	7/8"
4148316	1"
4148318	1 1/8"
4148319	1 3/16"
4148320	1 1/4"

Stock Bore




Part Number	Dim. "A" Bore
4148612	3/4"

Yoke & Shaft Assembly

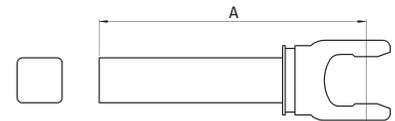


Part Number	Shaft Size	Dim. "A"
4143222	1" x 1 1/8" Rect.	26.12"
4143223	1" x 1 1/8" Rect.	35.62"
4143224	1" x 1 1/8" Rect.	47.62"

Yoke, Tube & Sleeve Assembly

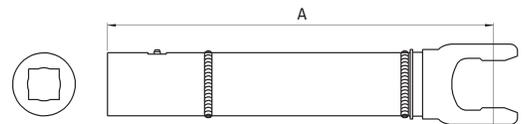


Part Number	Fits Shaft	Dim. "A"
4147520	1" x 1 1/8" Rect.	26.12"
4147521	1" x 1 1/8" Rect.	35.12"
4147522	1" x 1 1/8" Rect.	48.12"

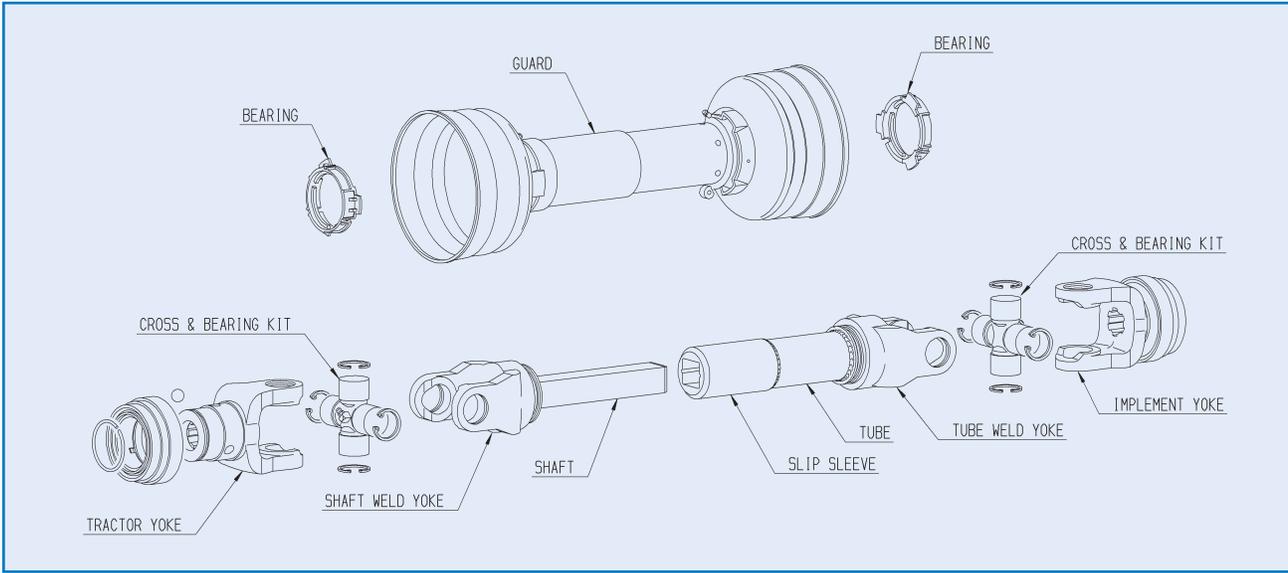


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4351306	1 3/8" - 6 Spl.
4351321	1 3/8" - 21 Spl.
4351320	1 3/4" - 20 Spl.

Cross & Bearing Kit




Part Number	Dim. "A"	Dim. "B"
4352000	1 1/4"	3 13/64"

Quick Disconnect



Part Number	Dim. "A" Bore	Dim. "B" Bore
4351019		1 1/8" Hex
4351014		1 1/4" Hex
4351006	1 3/8" - 6 Spl.	
4351021	1 3/8" - 21 Spl.	
4351036	1 3/4" - 6 Spl.	
4351020	1 3/4" - 20 Spl.	

Shaft Weld Yoke



Part Number	Dim. "A" Bore	Dim. "B" Bore
4353300	1 3/16" Sq.	
4353500		1 5/16" - 20 Spl.
4353600		1 11/16" - 20 Spl.

Standard Driveline Components

Shaft

Square



Part Number	Size	Length
4014403	1 3/16" Sq.	3'
4014406	1 3/16" Sq.	6'
4014410	1 3/16" Sq.	10'


Spline

(Induction Hardened)



Part Number	Dim. "A" Size	Length
4024103	1 5/16" - 20 Spl.	3'
4024203	1 11/16" - 20 Spl.	3'


Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim. "B" Bore	Fits OD Tube Size
4355305	5"	1 3/16" Sq.		2 1/8" (.120" Wall)
4355325	5"	1 3/16" Sq.		2 1/8" (.083" Wall) & 2 1/4" (.120" Wall)
4355408	8"	1 5/16" Sq.		2 1/2" (.120" Wall)
4355508	8"		1 5/16" - 20 Spl.	2 1/2" (.120" Wall)
4355605	5"		1 11/16" - 20 Spl.	2 1/2" (.120" Wall)
4355608	8"		1 11/16" - 20 Spl.	2 1/2" (.120" Wall)


Tube

Round



Part Number	Dim. "A" Size	Length
4026303	2 1/8" (.120" Wall)	3'
4026306	2 1/8" (.120" Wall)	6'
4026206	2 1/8" (.083" Wall)	6'
4026310	2 1/8" (.120" Wall)	10'

Tube Weld Yoke



Part Number	Fits OD Tube Size
4357600	2 1/8" (.083" Wall)
4357702 (with bore)	2 1/8" (.120" Wall)
4357802 (with bore)	2 1/4" (.120" Wall)
4357902 (with bore)	2 1/2" (.120" Wall)

Implement Yoke

Shear Pin


(With Pin Hole)



Part Number	Dim. "A" Bore
4358220	1 1/4"
4358222	1 3/8"
4358224	1 1/2"

Round Bore

(With Keyway & Set Screw Hole)




Part Number	Dim. "A" Bore	Standard Keyway
4358016	1"	1/4"
4358018	1 1/8"	1/4"
4358019	1 3/16"	1/4"
4358020	1 1/4"	1/4"
4358022	1 3/8"	5/16"
4358023	1 7/16"	3/8"
4358024	1 1/2"	3/8"
4358026	1 5/8"	3/8"
4358028	1 3/4"	3/8"



Implement Yoke (continued)


Round Bore

(With Double Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Double Keyway
4358419	1 3/16"	1/4" & 5/16"
4358420	1 1/4"	1/4" & 5/16"
4358422	1 3/8"	5/16" & 3/8"


Clamp Yoke



Part Number	Dim. "A" Bore
4358521	1 3/8" - 21 Spl.
4358540	1 3/4" - 20 Spl.
4358527	1 3/4" - 27 Spl.

Spline Bore


(With Pin Hole)



Part Number	Dim. "A" Bore
4358106	1 3/8" - 6 Spl.
4358121	1 3/8" - 21 Spl.


Square Bore

(With Set Screw Hole)




Part Number	Dim. "A" Bore
4358316	1"
4358318	1 1/8"
4358319	1 3/16"
4358320	1 1/4"
4358324	1 1/2"
4358326	1 5/8"

Stock Bore




Part Number	Dim. "A" Bore
4358616	1"

Yoke & Shaft Assembly




Part Number	Shaft Size	Dim. "A"
4353320	1 3/16" Sq.	17.69"
4353321	1 3/16" Sq.	21.69"
4353322	1 3/16" Sq.	28.69"
4353323	1 3/16" Sq.	33.19"
4353324	1 3/16" Sq.	44.94"

Yoke, Tube & Sleeve Assembly

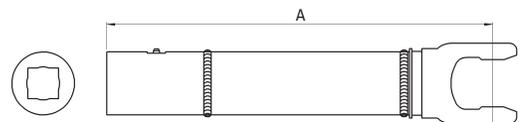


Part Number	Fits Shaft	Dim. "A"
4357720	1 3/16" Sq.	17.69"
4357721	1 3/16" Sq.	21.69"
4357722	1 3/16" Sq.	29.69"
4357723	1 3/16" Sq.	34.69"
4357724	1 3/16" Sq.	46.69"

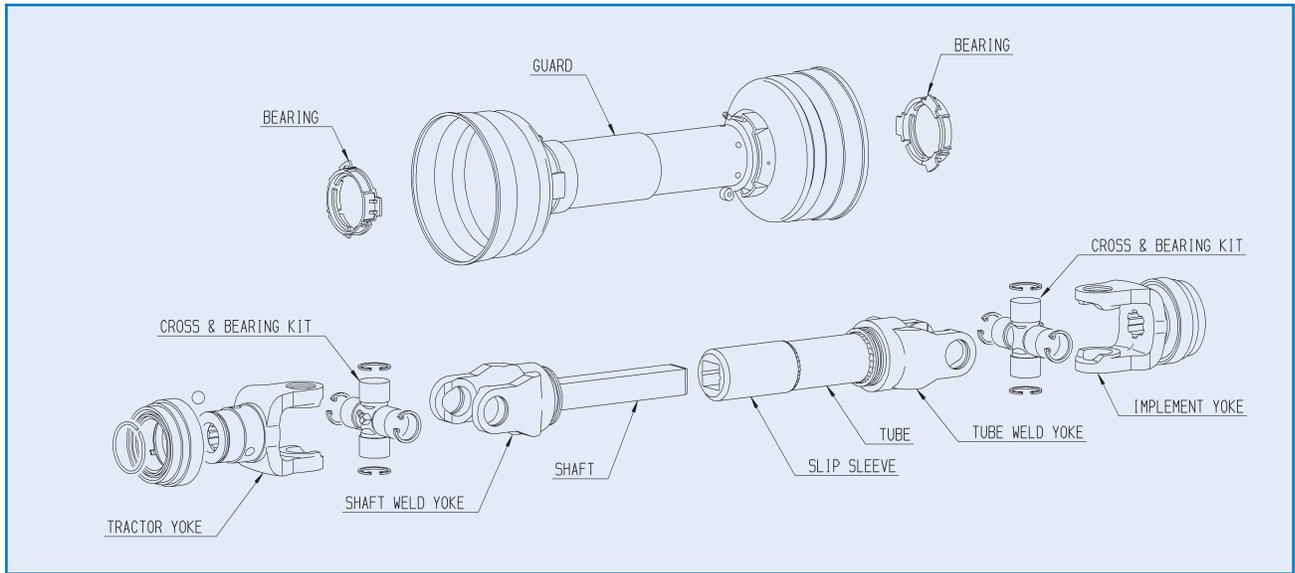


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4441306	1 3/8" - 6 Spl.
4441321	1 3/8" - 21 Spl.
4441320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4441006	1 3/8" - 6 Spl.
4441021	1 3/8" - 21 Spl.
4441020	1 3/4" - 20 Spl.

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"
4442000	1 5/16"	4"

Shaft Weld Yoke



Part Number	Dim. "A" Bore	Dim. "B" Bore
4443400	1 5/16" Sq.	
4443600		1 11/16" - 20 Spl.



44 Series Interchanges with Weasler (continued)

Shaft

Square



Part Number	Size	Length
4014503	1 5/16" Sq.	3'
4014506	1 5/16" Sq.	6'
4014510	1 5/16" Sq.	10'


Spline

(Induction Hardened)



Part Number	Dim "A" Size	Length
4024103	1 5/16" - 20 Spl.	3'
4024203	1 11/16" - 20 Spl.	3'


Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim "B" Bore	Fits Tube Size
4445405	5"	1 5/16" Sq.		2 1/2"(.120" Wall)
4355408	8"	1 5/16" Sq.		2 1/2"(.120" Wall)
4355508	8"		1 5/16" - 20 Spl.	2 1/2"(.120" Wall)
4355605	5"		1 11/16" - 20 Spl.	2 1/2"(.120" Wall)
4355608	8"		1 11/16" - 20 Spl.	2 1/2"(.120" Wall)


Tube

Round



Part Number	Dim "A" Size	Length
4026403	2 1/2"(.120" Wall)	3'
4026406	2 1/2"(.120" Wall)	6'
4026410	2 1/2"(.120" Wall)	10'

Tube Weld Yoke




Part Number	Fits Tube Size
4447902 (with bore)	2 1/2"(.120" Wall)

Standard Driveline Components

Implement Yoke

Round Bore


(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Standard Keyway
4448020	1 1/4"	1/4"
4448022	1 3/8"	5/16"
4448023	1 7/16"	3/8"
4448024	1 1/2"	3/8"
4448026	1 5/8"	3/8"
4448028	1 3/4"	3/8"
4448032	2"	1/2"


Square Bore

(With Set Screw Hole)



Part Number	Dim. "A" Bore
4448318	1 1/8"


Stock Bore



Part Number	Dim. "A" Bore
4448616	1"


Round Bore

(With Double Keyway & Set Screw Hole)




Part Number	Dim. "A" Bore	Double Keyway
4448420	1 1/4"	1/4" & 5/16"
4448422	1 3/8"	1/4" & 5/16"
4448424	1 1/2"	5/16" & 3/8"

Yoke & Shaft Assembly

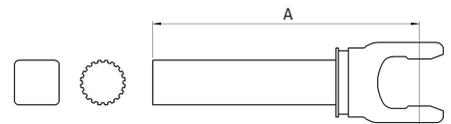


Part Number	Shaft Size	Dim. "A"
4443420	1 5/16" Square	33.12"
4443421	1 5/16" Square	45.12"
4443620	1 11/16" - 20 Spl.	33.12"

Clamp Yoke



Part Number	Dim. "A" Bore
4448506	1 3/8" - 6 Spl.
4448521	1 3/8" - 21 Spl.
4448540	1 3/4" - 20 Spl.
4448527	1 3/4" - 27 Spl.


Yoke, Tube & Sleeve Assembly

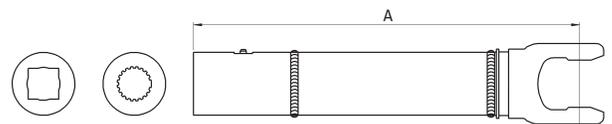


Part Number	Fits Shaft	Dim. "A"
4447920	1 5/16" Square	35.62"
4447921	1 5/16" Square	45.62"
4447922	1 11/16" - 20 Spl.	35.62"

Spline Bore

(With Pin Hole)




Part Number	Dim. "A" Bore
4448106	1 3/8" - 6 Spl.
4448121	1 3/8" - 21 Spl.

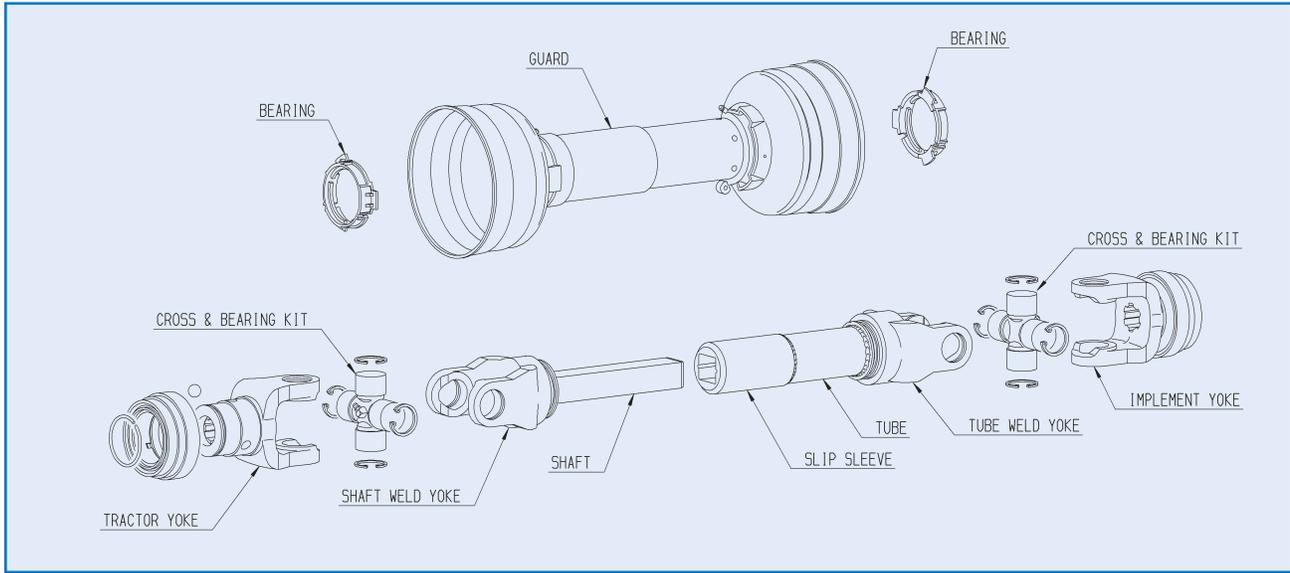


Tractor Yoke

Slide Collar




Part Number	Dim. "A" Bore
4551306	1 3/8" - 6 Spl.
4551321	1 3/8" - 21 Spl.
4551320	1 3/4" - 20 Spl.

Quick Disconnect




Part Number	Dim. "A" Bore
4551006	1 3/8" - 6 Spl.
4551021	1 3/8" - 21 Spl.
4551036	1 3/4" - 6 Spl.
4551020	1 3/4" - 20 Spl.

Cross & Bearing Kit



Part Number	Dim. "A"	Dim. "B"
4552000	1 17/32"	4 19/64"

Shaft Weld Yoke



Part Number	Dim. "A" Bore	Dim. "B" Bore
4553300	1 3/16" Sq.	
4553400	1 5/16" Sq.	
4553600		1 11/16" - 20 Spl.

Shaft

Square



Part Number	Size	Length
4014503	1 5/16" Sq.	3'
4014506	1 5/16" Sq.	6'
4014510	1 5/16" Sq.	10'


Spline

(Induction Hardened)



Part Number	Dim. "A" Size	Length
4024103	1 5/16" - 20 Spl.	3'
4024203	1 11/16" - 20 Spl.	3'


Slip Sleeve



Part Number	Length	Dim. "A" Bore	Dim "B" Bore	Fits Tube Size
4445405	5"	1 5/16" Sq.		2 1/2" (.120" Wall)
4355408	8"	1 5/16" Sq.		2 1/2" (.120" Wall)
4355508	8"		1 5/16" - 20 Spl.	2 1/2" (.120" Wall)
4355605	5"		1 11/16" - 20 Spl.	2 1/2" (.120" Wall)
4355608	8"		1 11/16" - 20 Spl.	2 1/2" (.120" Wall)


Tube

Round



Part Number	Dim "A" Size	Length
4026403	2 1/2" (.120" Wall)	3'
4026406	2 1/2" (.120" Wall)	6'
4026410	2 1/2" (.120" Wall)	10'

Tube Weld Yoke




Part Number	Fits Tube Size
4557902 (with bore)	2 1/2" (.120" Wall)



Implement Yoke


Round Bore

(With Keyway & Set Screw Hole)



Part Number	Dim. "A" Bore	Standard Keyway
4558022	1 3/8"	5/16"
4558024	1 1/2"	3/8"
4558026	1 5/8"	3/8"
4558028	1 3/4"	3/8"
4558032	2"	1/2"


Clamp Yoke



Part Number	Dim. "A" Bore
4558506	1 3/8" - 6 Spl.
4558521	1 3/8" - 21 Spl.
4558540	1 3/4" - 20 Spl.
4558527	1 3/4" - 27 Spl.


Spline Bore

(With Pin Hole)




Part Number	Dim. "A" Bore
4558106	1 3/8" - 6 Spl.
4558121	1 3/8" - 21 Spl.

Stock Bore




Part Number	Dim. "A" Bore
4558616	1"

Yoke & Shaft Assembly

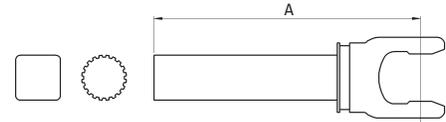

Part Number	Shaft Size	Dim. "A"
4553420	1 5/16" Square	32.75"
4553421	1 5/16" Square	44.88"
4553620	1 11/16" - 20 Spl.	32.75"

Yoke, Tube & Sleeve Assembly

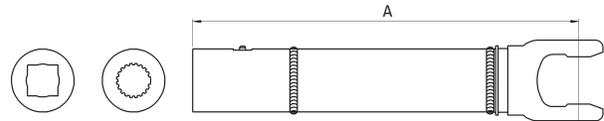


Part Number	Fits Shaft	Dim. "A"
4557920	1 5/16" Square	33.38"
4557921	1 5/16" Square	45.38"
4557922	1 11/16" - 20 Spl.	33.38"

Standard Driveline Components


Standard Type

Part No.	Style	A mm	B mm
4A12000	AGM 1	22.0	54.8
4A22000	AGM 2	23.8	61.2
4A32000	AGM 3	27.0	74.5
4A42000	AGM 4	32.0	76.0
4A52000	AGM 5	36.0	89.0
4212000	WAL 2100	22.0	54.8
4222000	WAL 2200	23.8	61.2
4232000	WAL 2300	27.0	74.5
4242000	WAL 2400	32.0	76.0
4252000	WAL 2500	36.0	89.0
4612000	WAL I	27.0	70.0
4602000	WAL II	34.0	90.0
4622000	WAL 220	30.2	92.0
4B12054	ByPy 1	22.0	54.0
4B22061	ByPy 2	23.8	61.2
4B32070	ByPy 3	27.0	70.0
4B42074	ByPy 4	27.0	74.5
4B52079	ByPy 5	30.2	79.4
4B62092	ByPy 6	30.2	92.0
4B72094	ByPy 7	34.9	94.0
4B82006	ByPy 8	34.9	106.4

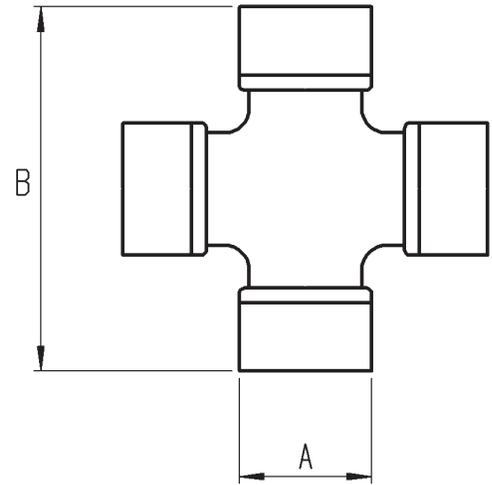

80° Constant Velocity Type


Part No.	Style	A mm	B mm	C mm	D mm
4A32800	AGM 380	74.6	91.0	23.8	27.0
4A42800	AGM 480	76.0	94.0	27.0	32.0
4A52800	AGM 580	89.0	106.0	32.0	36.0
4222800	WAL 2280	61.2	76.0	22.0	23.8
4232800	WAL 2380	74.6	91.0	23.8	27.0
4242800	WAL 2480	76.0	94.0	27.0	32.0
4252800	WAL 2580	89.0	106.0	32.0	36.0

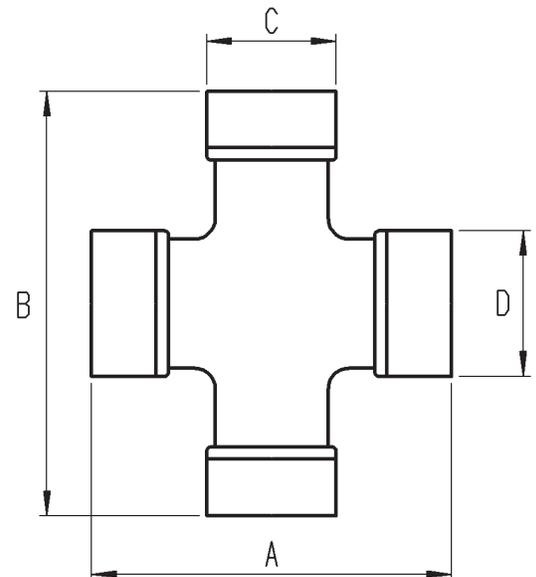




North American Type

Part No.	Style	Type	A	B
4062000	Weasler 6	Int	31/32"	2 5/16"
4122000	Weasler 12	Int	1 1/16"	2 1/2"
4142000	Weasler 14	Ext	1 1/8"	2 5/8"
4352000	Weasler 35	Ext	1 1/4"	3 13/64"
4442000	Weasler 44	Int	1 5/16"	4"
4552000	Weasler 55	Ext	1 17/32"	4 19/64"
4702000	Spicer 1000	Int	15/16"	2 9/32"
4782000	Neapco 2600	Ext	1 3/8"	4 3/16"

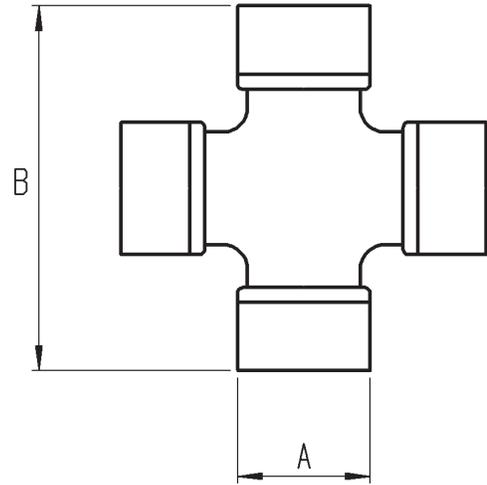

External Snap Ring Type

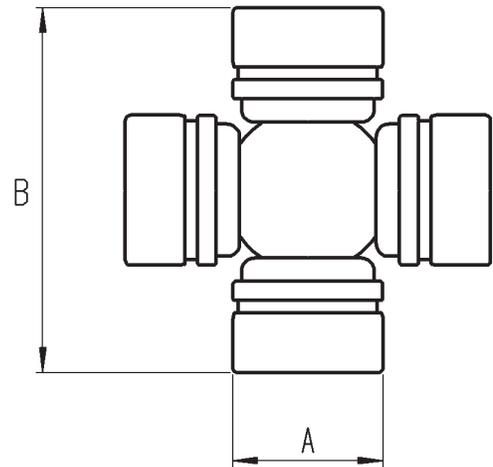

Internal Snap Ring Type


Walterscheid Style

Part No.	Series	Profile Type	Length mm	Shape	Size	A mm	B mm	C mm
4204010	AGM 1 / WAL 2100	Inner	1000	Lemon	00c	23.5	31.0	3.4
4204015	AGM 1 / WAL 2100	Inner	1500	Lemon	00c	23.5	31.0	3.4
4206010	AGM 1 / WAL 2100	Outer	1000	Lemon	0a	30.0	39.0	2.8
4206015	AGM 1 / WAL 2100	Outer	1500	Lemon	0a	30.0	39.0	2.8
4204110	AGM 1 & 2 / WAL 2200 & 2300	Inner	1000	Lemon	Ov	34.5	40.0	4.0
4204115	AGM 1 & 2 / WAL 2200 & 2300	Inner	1500	Lemon	Ov	34.5	40.0	4.0
4206110	AGM 1 & 2 / WAL 2200 & 2300	Outer	1000	Lemon	1	41.0	48.0	3.0
4206115	AGM 1 & 2 / WAL 2200 & 2300	Outer	1500	Lemon	1	41.0	48.0	3.0
4204210	AGM 3 & 4 / WAL 2300 & 2400	Inner	1000	Lemon	1b	39.5	49.0	4.5
4204215	AGM 3 & 4 / WAL 2300 & 2400	Inner	1500	Lemon	1b	39.5	49.0	4.5
4206210	AGM 3 & 4 / WAL 2300 & 2400	Outer	1000	Lemon	2a	48.0	57.5	4.0
4206215	AGM 3 & 4 / WAL 2300 & 2400	Outer	1500	Lemon	2a	48.0	57.5	4.0
4204310	AGM 4 & 5 / WAL 2400 & 2500	Inner	1000	Star	S4	51.0	37.0	N/A
4204315	AGM 4 & 5 / WAL 2400 & 2500	Inner	1500	Star	S4	51.0	37.0	N/A
4206310	AGM 4 & 5 / WAL 2400 & 2500	Outer	1000	Star	S5	61.0	47.0	4.5
4206315	AGM 4 & 5 / WAL 2400 & 2500	Outer	1500	Star	S5	61.0	47.0	4.5


Walterscheid CV Style *For use with coated profile options*

Part No.	Series	Profile Type	Length mm	Shape	Size	A mm	B mm	C mm
4204510	AGM 380 / WAL 2280 & 2380	Inner	1000	Lemon	0vGA	34.5	40.0	4.0
4206510	AGM 380 / WAL 2280 & 2380	Outer	1000	Lemon	1G	41.0	48.0	2.7
4204610	AGM 480 / WAL 2480	Inner	1000	Lemon	1bGA	39.5	49.0	4.5
4206610	AGM 480 / WAL 2480	Outer	1000	Lemon	2aG	48.0	57.5	3.5
4204710	AGM 580 / WAL 2580	Inner	1000	Star	S4GA	51.0	37.0	N/A
4206310	AGM 580 / WAL 2580	Outer	1000	Star	S5	61.0	47.0	4.5

Lemon Shape

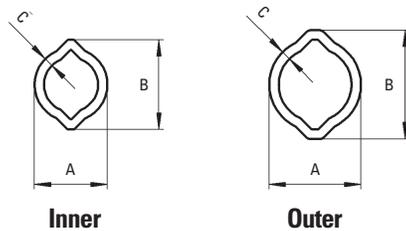

Star Shape

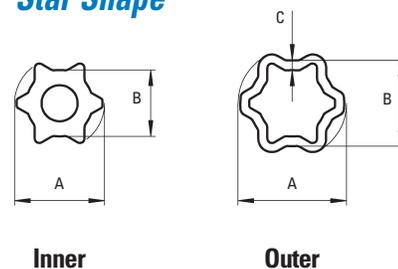





Bondioli Style/Tri-Lobe

Part No.	Series	Profile Type	Length mm	A mm	B mm
4B04026	ByPy 1	Inner	1000	26.5	3.4
4B04526	ByPy 1	Inner	1500	26.5	3.4
4B06033	ByPy 1	Outer	1000	32.5	2.6
4B06533	ByPy 1	Outer	1500	32.5	2.6
4B04029	ByPy 2	Inner	1000	29.0	4.1
4B04529	ByPy 2	Inner	1500	29.0	4.1
4B06036	ByPy 2	Outer	1000	36.0	3.2
4B06536	ByPy 2	Outer	1500	36.0	3.2
4B06036	ByPy 3	Inner	1000	36.0	3.2
4B06536	ByPy 3	Inner	1500	36.0	3.2
4B06043	ByPy 3	Outer	1000	43.5	3.4
4B06543	ByPy 3	Outer	1500	43.5	3.4
4B04037	ByPy 4	Inner	1000	36.0	3.9
4B04537	ByPy 4	Inner	1500	36.0	3.9
4B06043	ByPy 4	Outer	1000	43.5	3.4
4B06543	ByPy 4	Outer	1500	43.5	3.4
4B04045	ByPy 5	Inner	1000	45.0	3.9
4B04545	ByPy 5	Inner	1500	45.0	3.9
4B06052	ByPy 5	Outer	1000	51.5	3.0
4B06552	ByPy 5	Outer	1500	51.5	3.0
4B04045	ByPy 6	Inner	1000	45.0	3.9
4B04545	ByPy 6	Inner	1500	45.0	3.9
4B06054	ByPy 6	Outer	1000	54.0	4.5
4B06554	ByPy 6	Outer	1500	54.0	4.5
4B04046	ByPy 7	Inner	1000	45.0	5.4
4B04546	ByPy 7	Inner	1500	45.0	5.4
4B06054	ByPy 7	Outer	1000	54.0	4.5
4B06554	ByPy 7	Outer	1500	54.0	4.5
4B06054	ByPy 8	Inner	1000	54.0	4.5
4B06554	ByPy 8	Inner	1500	54.0	4.5
4B06063	ByPy 8	Outer	1000	63.0	4.1
4B06563	ByPy 8	Outer	1500	63.0	4.1

Tri-Lobe Shape



Inner



Outer

Weasler Style – Shafting

Part No.	Size & Shape	Length
4014006	3/4" Square	6'
4014106	7/8" Square	6'
4014206	15/16" Square	6'
4014306	1" Square	6'
4014403	1 3/16" Square	3'
4014406	1 3/16" Square	6'
4014410	1 3/16" Square	10'
4014503	1 5/16" Square	3'
4014506	1 5/16" Square	6'
4014510	1 5/16" Square	10'
4014603	3/4" x 7/8" Rectangle	3'
4014606	3/4" x 7/8" Rectangle	6'
4014610	3/4" x 7/8" Rectangle	10'
4014703	1" x 1 1/8" Rectangle	3'
4014706	1" x 1 1/8" Rectangle	6'
4014710	1" x 1 1/8" Rectangle	10'
4024003	1" - 15 Spline (Induction Hardened)	3'
4024103	1 5/16" - 20 Spline (Induction Hardened)	3'
4024203	1 11/16" - 20 Spline (Induction Hardened)	3'

Weasler Style – Tubing

Part No.	Size & Shape	Length
4016006	1" Square	6'
4016106	1 1/4" Square (.109" Wall)	6'
4016206	1 1/4" Square (.120" Wall)	6'
4016306	1 5/8" Square	6'
4016403	1" x 1 1/8" Rectangle	3'
4016406	1" x 1 1/8" Rectangle	6'
4016410	1" x 1 1/8" Rectangle	10'
4016503	1 1/4" x 1 3/8" Rectangle	3'
4016506	1 1/4" x 1 3/8" Rectangle	6'
4016510	1 1/4" x 1 3/8" Rectangle	10'
4026003	1 1/2" Round (.065" Wall)	3'
4026006	1 1/2" Round (.065" Wall)	6'
4026103	2" Round (.083" Wall)	3'
4026106	2" Round (.083" Wall)	6'
4026110	2" Round (.083" Wall)	10'
4026206	2 1/8" Round (.083" Wall)	6'
4026303	2 1/8" Round (.120" Wall)	3'
4026306	2 1/8" Round (.120" Wall)	6'
4026310	2 1/8" Round (.120" Wall)	10'
4026403	2 1/2" Round (.120" Wall)	3'
4026406	2 1/2" Round (.120" Wall)	6'
4026410	2 1/2" Round (.120" Wall)	10'
4026506	2 3/4" Round (.109" Wall)	6'

Copyright ©2006 GKN Walterscheid, Inc. All rights reserved. No part of this catalog may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without the prior written permission of the copyright holder.

Agmaster is a trademark of GKN Walterscheid, Inc. Weasler is a registered trademark of Weasler Engineering, Inc.