



Special Products Company

products	new products	custom designs	3 pt hitch system	plan-o-grams/merchandising	customer service/ordering	contact us/suggestions	home
----------	--------------	----------------	-------------------	----------------------------	---------------------------	------------------------	------

The Three Point Hitch System


Most of the products described in this web site are components of the typical tractor three-point hitch system that is standard on almost all farm tractors today. See illustration A below. The basic function of the system is the attachment and adjustment of agricultural implements. The three primary parts of the system are the top link and two lower lift arms as shown in illustration B. Adjustment of one or all of these components allows the tractor operator to raise, lower or tilt an implement. The three-point linkage parts described on this web site are built to standard specifications set by the American Society of Agricultural Engineers described in the table below.

Definitions

CATEGORIES 0,1,2,3 and 4 are used to classify tractors by drawbar horsepower.

The table below gives dimensions and the horsepower ratings that are associated with these three categories

Maximum Drawbar Horsepower	Top Link Pin Diameter	Draw Pin Diameter	Lift Arm Spacing
Cat. 0- up to 20	5/8"	5/8"	20"
Cat 1- up to 45	3/4"	7/8"	26"
Cat 2- 40 to 100	1"	1 1/8"	32"
Cat 3- 80 to 225	1-1/4"	1-7/16"	38"
Cat 4- 180 to 400	1 3/4"	2"	46 "

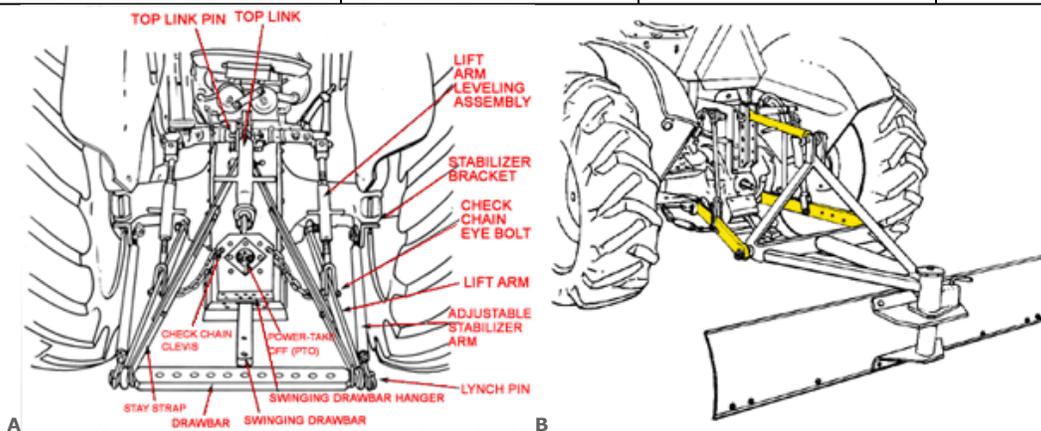

IMPORTANT SAFETY TIP: Where applicable, keep all shields in place and if needed contact us for replacement safety decals. Contact us at Toll Free: (800) 525-8322 or e-mail us at speeco@speeco.com.
 Web Development Provided by Harness the Web, Inc.